


▲ DH-MV-SI5131MG000/1E

- Powerful intel platform, easy for secondary development
- 4G/8G memory and 64G/128G SSD internal storage
- Software trigger/Hardware trigger/Free run mode
- Industrial grade M12 connector
- 1Gbps Ethernet industrial interface, max 100m transmission

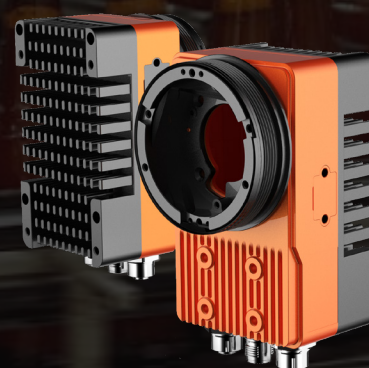


Specification

Model	Sensor	Sensor type	Shutter	Resolution	Frame rate (fps)	Bit depth	Interface	Mono/Color	Pixel size (μ m)	Sensor size
DH-MV-SI5131MG000E	Python 1300	CMOS	Global	1280*1024	180	12	GigE	Mono	4.8x4.8	1/2"
DH-MV-SI5131MG001E	Python 1300	CMOS	Global	1280*1024	180	12	GigE	Mono	4.8x4.8	1/2"

Model	DH-MV-SI5131MG000E		DH-MV-SI5131MG001E	
Effective Pixels	1.3MP			
Operating System	Win 10 X64 OS			
Processor	Intel Apollo Lake platform			
SNR	>38dB			
Dynamic Range	60dB			
Interface	3 physical interface: 1 GigE, 1 GPIO, 1 VGA & 1 USB port			
GPIO	12 pins IO interface: 3 Opto-isolated input and 3 Opto-isolated output			
Image Format	Mono8/10/12			
Gain	X1~X6			
Gamma	Range from 0 to 4, support LUT			
Memory	LPDDR4 4G Byte		LPDDR4 8G Byte	
Storage	Internal storage: 64GB SSD		Internal storage: 128GB SSD	
Exposure Time	16μS~1S			
Trigger Mode	Software trigger/Hardware trigger/Free run mode			
User Setting	Support two sets of user-defined configurations			
Dimensions	69mm x 117mm x 62mm			
Weight	<2kg			
LED indicator	5 status indicators: 1 system, 2 network and 2 user configurable indicators			
Lens Mount	Support C / M12 mount			
Power Supply	Support 24V DC power supply			
Power Consumption	≤30W			
Temperature	Storage temperature:-30° C~ + 80° C; Operation temperature: 0° C~+50° C			


Spectrogram

SI5131MG000E

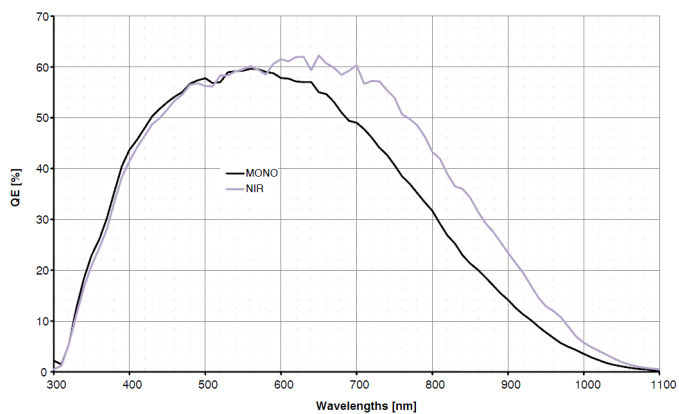


Quantum Efficiency Curve for Mono Sensor

SI5131MG001E

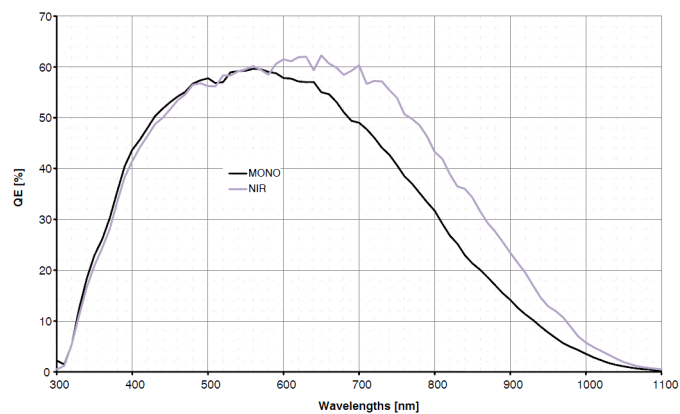


Quantum Efficiency Curve for Mono Sensor

Dimensions

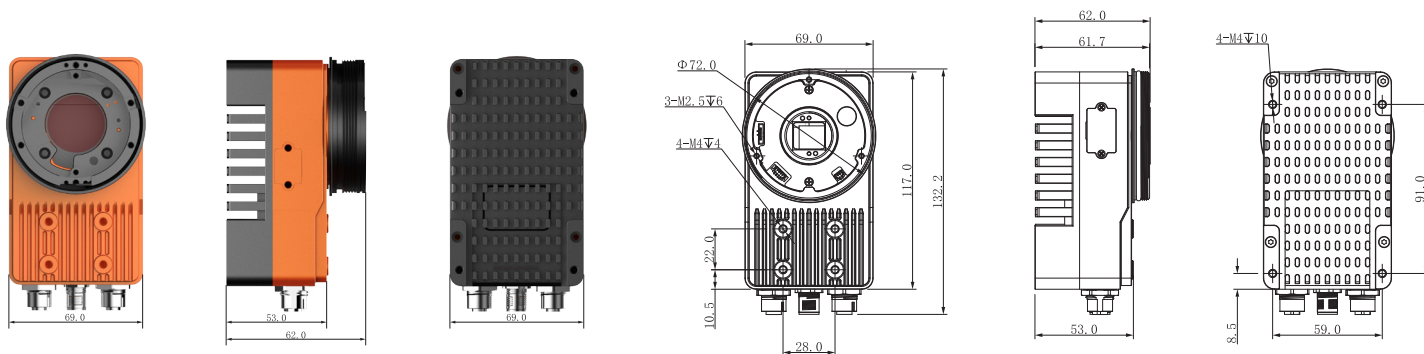

IO Interface Instruction

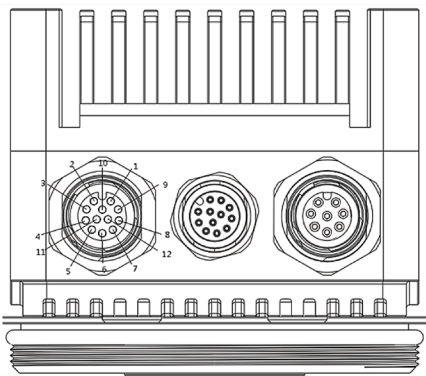

Pin	Signal	Description
1	OPT_IN1	Opto-isolated input 1
2	OPT_IN2	Opto-isolated input 2
3	OPT_OUT1	Opto-isolated output 1
4	OPT_OUT2	Opto-isolated output 2
5	RXD RS232	Serial port input
6	OPT_IN_GND	Opto-isolated in ground
7	Power	DC 24V input
8	GND	Power ground
9	OPT_OUT_GND	Opto-isolated out ground
10	OPT_IN0	Opto-isolated input 0
11	OPT_OUT0	Opto-isolated output 0
12	TXD RS232	Serial port output