

DHI-VTA8111A-4/AG-4/AB-4

Emergency Phone Tower



Technical Specification

Mode	DHI-VTA8111A-4/AG-4/AB-4
------	--------------------------

System

Main Processor	Embedded Micro Processor
----------------	--------------------------

Operation System	Embedded LINUX OS
------------------	-------------------

Video

Video Compression	H.264
-------------------	-------

Image Sensor	1/3" 1.3MP CMOS
--------------	-----------------

Lens	Pinhole
------	---------

Day/Night	Color Image
-----------	-------------

Audio

Audio Compression	G.711
-------------------	-------

Audio Input	Omnidirectional Mic
-------------	---------------------

Audio Output	Built-in Speaker
--------------	------------------

Bidirectional Talk	Support Dual-way Bidirectional talk
--------------------	-------------------------------------

Display

LCD Screen	7" 1024x600, Capacitive
------------	-------------------------

Operation Mode

Keypad	Single Mechanical Button
--------	--------------------------

Reader	Mifare Card
--------	-------------

Interface

Alarm In	2
----------	---

Alarm Out	2
-----------	---

Alarm Lamp	1
------------	---

Siren	1
-------	---

LCD Screen	1
------------	---

Features

- HD CMOS camera
- Night vision
- Video & audio talk
- Remote monitor and broadcast
- Alarm integration
- Excellent vandal proof, IP65, IK10



Network

Ethernet	10M/100Mbps Self-adaptive
Fibre	100M/1000Mbps Self-adaptive
Network Protocol	TCP/IP


Extension

PSTN	Support
3G/4G	Support
Wi-Fi	Support
IP PTZ	Support
IP Dome	Support

General

Ingress Protection	IP65, IK10
Tamper Switch	2
Memory Slot	Micro SD, Max 64G
Installation	Pole
Material	SGCC
Power	AC 176V-264V@47Hz-63Hz
Power Consumption	Standby ≤3W, Work ≤80W
Working Environments	-30°C~+60°C
Relative Humidity	10%~90%RH
Dimensions	2400mm×340mm×330mm
Weight	100Kg

Dimensions

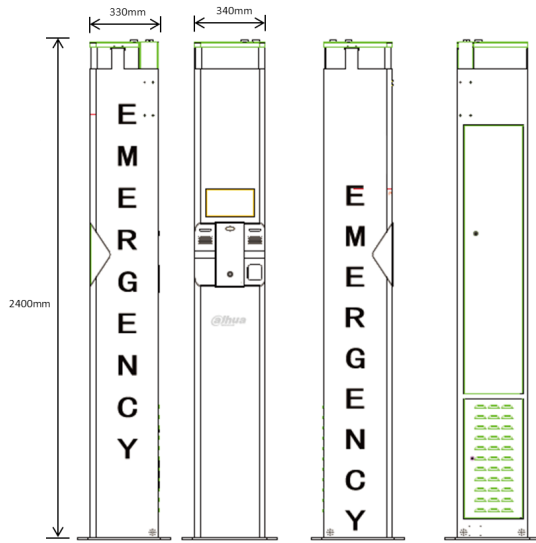

Application

