


DF5210HD-DN/IR

Nightline

High Definition Camera, 2MP, 1080p/60, H.264, Day/Night (ICR), Integrated IR Illumination, Motor-driven Varifocal Lens, One-Push Autofocus, P-Iris, PoE, Outdoor Wall Mount Bracket

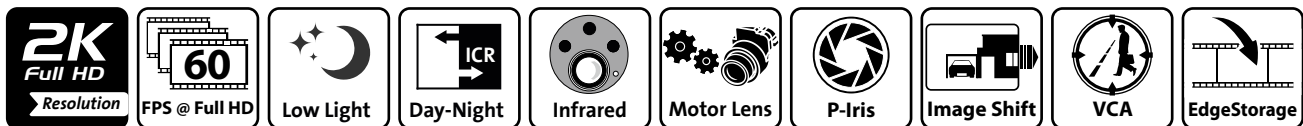

The network camera DF5210HD-DN/IR has been developed with special attention to changing light conditions for **24-hour video surveillance**. The combination of the most **advanced sensor and encoder technology** results in recordings with excellent contrast, brilliant clarity and **highest detail resolution and color fidelity**, even in low light conditions.

Excellent Low-Light characteristics

The **extremely high light sensitivity** of the sensor and the sophisticated **image processing** ensure crisp **color images** even in the dark. In night mode, the camera also provides outstanding results due to the **excellent infrared sensitivity**.

Automatic switching of presets

The camera is equipped with an **ambient light sensor** and a **removable IR cut filter**, and can automatically switch between **day and night mode**. In addition, **different day and night presets** for the exposure settings can be defined and adjusted.

Integrated homogeneous IR illumination

The automatic Day/Night operation is supported by a **uniform IR illumination** by means of semi-covert 850 nm **high power LEDs**. In the IR mode at night, the camera provides excellent results due to the **high infrared sensitivity** and thus meets the most demanding requirements in a 24-hour operation.

Motor-driven varifocal lens with P-Iris

The camera has a **motor-driven megapixel varifocal lens** that is perfectly tuned to the image sensor. The adjustment of zoom, focus and iris is made conveniently using a web browser. The manual lens setting directly at the installation site of the camera is not required.

Digital Image Shift

The **Digital Image Shift** function allows a comfortable **fine adjustment of the captured image section** (horizontal and vertical at 16:9 resolutions, horizontal at 4:3 resolutions) via a web browser ensuring a quick and easy installation of the camera. Depending on the selected resolution, the used area on the image sensor can be moved and adapted to the local conditions. The manual fine alignment of the camera directly at the installation site is not necessary.

Video Content Analysis

The integrated **Video Content Analysis (VCA)** detects **movements and objects** in the uncompressed image and analyzes them in real-time (depending on the analysis resolution) with highly developed analysis functions such as **Intrusion Detection** or **Line Crossing**. The detected **events** can be used to trigger the recording of a **SMAVIA recording system**. Together with the detected objects and the corresponding metadata, they are stored in a database. This allows the targeted search and evaluation of the recordings by **SMAVIA Viewing Client** with the function **SmartFinder**.

EdgeStorage

The camera is equipped with a **RAM memory** that is used by the **EdgeStorage** function for storing the video stream in case of a network failure. When the network is restored, the **SmartBackfill** function ensures a fast transmission to the **SMAVIA recording system**. This stores the video stream with high speed and then continues the recording of the live stream seamlessly.

Further features

- 1/1.9" Full HD CMOS image sensor
- Adjustable IR intensity and Day/Night switching threshold level
- Minimum illumination 0 lux (with IR LED On)
- Memory expansion with microSDHC card
- Frame rate of 60 fps at 1080p or up to 120 fps at 720p
- Video compression H.264, MJPEG
- Simultaneous Dual-, Tri- or Quad Streaming
- Privacy Zone Masking
- Digital flip function
- Wide Dynamic Range (WDR)
- 3D Digital Noise Reduction (3D DNR)
- Power over Ethernet (PoE Class 0, IEEE 802.3af)
- Outdoor wall mount bracket with internal cable routing
- IP66-rated weather-proof enclosure

DF5210HD-DN/IR

High Definition Camera, 2 MP, 1080p/60, H.264, Day/Night (ICR), Integrated IR Illumination, Motor-driven Varifocal Lens, One-Push Autofocus, P-Iris, PoE, Outdoor Wall Mount Bracket

Camera	
006577	 <p>DF5210HD-DN/IR High definition camera, 2 MP, 1080p/60, H.264, day/night (ICR), integrated IR illumination, motor-driven varifocal lens, one-push autofocus, P-Iris, PoE, outdoor wall mount bracket, F1.6 / 4,5 - 10 mm</p>
Power Supply	
004316	 <p>PoE Midspan 30 W Midspan power supply unit, 1x Ethernet port, 10/100/1000Base-T, 802.3at, 802.3af, 30 W</p>
Wall Mount	
004386	 <p>WCPA - Support Plate Adapter¹⁾ Reinforcing support plate WCPA for adapting the wall brackets WBMA, WBOVA2 and IR housing wall mount bracket</p>
Corner Mount	
004390	 <p>WCWA - Corner Mount Adapter¹⁾ Corner mount adapter WCWA for corner mounting</p>
Pole Mount 65 - 110 mm	
004387	 <p>WSFPA - Pole Mount Adapter¹⁾ Pole mount adapter WSFPA for pole diameters 65 - 110 mm (2.6 - 4.3")</p>
Pole Mount 210 - 225 mm	
004386	 <p>WCPA - Support Plate Adapter¹⁾ Reinforcing support plate WCPA for adapting the wall brackets WBMA, WBOVA2 and IR housing wall mount bracket</p>
004388	 <p>DBHWGC - Pole Mount Adapter¹⁾ Pole mount adapter DBHWGC for pole diameters 210 - 225 mm (8.3 - 8.6")</p>

1) Note: The color of this mounting accessories (gray-white) differs from that of the IR camera / wall mount bracket (white).

DF5210HD-DN/IR

Nightline

High Definition Camera, 2 MP, 1080p/60, H.264, Day/Night (ICR), Integrated IR Illumination, Motor-driven Varifocal Lens, One-Push Autofocus, P-Iris, PoE, Outdoor Wall Mount Bracket

Sensor	
Type	1/1.9" 2.3 megapixel Full HD CMOS image sensor
Number of sensor pixels	2MP
Signal processing	Pure Digital Signal Processing
Image capture	Progressive Scan
Sensor sensitivity	IR LED OFF: 0.002lux (F1.6, AGC ON) IR LED On: 0lux
Dynamic range	94 dB
Signal to noise ration (SNR _{MAX})	> 50 dB

Lens	
Type	Motor-driven varifocal lens
Format	1/1.8"
Mount	Board Lens
Focal length	4.5 – 10 mm
Iris range	F1.6 – Closed
Iris control	P-Iris (motor-driven)
Zoom control	Motor-driven
Focus control	Motor-driven
Minimum object distance	0.3 m
IR corrected	Yes
Available angles of view ²⁾ (H × V) at wide end	Approx. 87° × 50° @ 1080p
Available angles of view ²⁾ (H × V) at tele end	Approx. 40° × 23° @ 1080p

Format and Encoding	
Video standard	SDTV (PAL/NTSC) HDTV (SMPTE 296M, SMPTE 274M)
Resolution in mode 1080p (16:9)	1920 × 1080 (1080p) @ 50/60 fps 1280 × 720 (720p) @ 50/60 fps 640 × 480 (480p) @ 50/60 fps 320 × 240 @ 50/60 fps
Resolution in mode 1080p (4:3)	1440 × 1080 @ 50/60 fps 1280 × 960 @ 50/60 fps
Resolution in mode 720p (16:9)	1280 × 720 (720p) @ 100/120 fps 640 × 480 (480p) @ 100/120 fps 320 × 240 @ 100/120 fps
Video compression	H.264, MJPEG
Frame rate	Up to 120 fps
Video bit rate	1 – 12 Mbit/s, CBR (constant bit rate), VBR (variable bit rate), with priority setting for image quality ³⁾
Video streaming	Simultaneous Dual-, Tri- or Quad-Streaming
Transfer format	Progressive (full image)
Audio compression	G.711
Audio bit rate	64 kbit/s
Live streaming transmission method	Unicast, Multicast
Number of live streams / clients	Up to 5 streams with up to 12 Mbit/s simultaneously

2) All specifications ±5%. Minor shadowing (vignetting) may occur at extreme wide end due to the construction and do not constitute a defect.
3) If the total available bit rate is not sufficient, not the image quality but the number of frames is adjusted.

DF5210HD-DN/IR

Nightline

High Definition Camera, 2 MP, 1080p/60, H.264, Day/Night (ICR), Integrated IR Illumination, Motor-driven Varifocal Lens, One-Push Autofocus, P-Iris, PoE, Outdoor Wall Mount Bracket

Functions	
Day/Night switching	Ambient light sensing and removable IR cut filter (ICR), switching threshold level adjustable
Black-and-white mode	Automatic (at low light or in night mode) ⁴⁾ , On, Off
Automatic Electronic Shutter	1/1 – 1/8000 s
Slow Shutter Limit	1/1 – 1/1000 s
Lens control	Zoom control (Tele – Wide), Focus control (Far – Near, One-Push AF), Iris control (P-Iris) via web browser
Digital flip function	Horizontal, vertical or both axes
Digital Image Shift	Horizontal and vertical at 16:9 resolutions, horizontal at 4:3 resolutions
Digital Noise Reduction	3D-DNR (adjustable by 10 levels)
Exposure presets	Universal, Indoor, Fluorescent, Casino, Low-Light, User-Defined (with automatic day/night switching)
Exposure compensation	-2 EV (Exposure Value) to + 2 EV (adjustable by 200 levels)
Exposure metering	Average metering (light information from entire scene), center-weighted average metering, spot metering
Brightness adjustment	Automatic (ALC), Manual
Gain control	Automatic (AGC) with adjustable Gain Limit
White balance	Auto: ATW (Auto Tracking White Balance), One-Push AWB (Automatic White Balance) Fixed: 2800K, 4000K, 5000K, 6500K and 7500K
Privacy Zone Masking	Hiding/masking of any number of protected areas (up to 100% of the entire image)
Alarm notification	Via DaVid protocol (Dallmeier Video Protocol) to PGuard advance Via E-Mail and FTP image upload in preparation
Alarm trigger	Application restart, EdgeStorage status
Video Content Analysis	Intrusion Detection (detection of access to a defined area) Line Crossing (detection of a virtual line crossing) Tamper Detection (detection of manipulations on the camera) Object Classification (classification of objects) Face Detection (detection of faces) ⁵⁾

Protocols	
Ethernet protocols	IPv4 (ARP, ICMP, IGMPv2/IGMPv3), UDP, TCP, LLDP, CDP(v1,v2), DSCP(QoS), DNS, DHCP, NTP, HTTP/HTTPS, RTSP/RTP/RTCP, SNMP(v1,v2c,v3)
Ethernet protocols in preparation	IPv6 (NDP, ICMPv6, MLDv1/MLDv2, SLAAC, RDNSS), UDPv6, TCPv6, DNSv6, DHCPv6, LDAP, IEEE 802.1X

Connections	
Power&Ethernet	1x RJ45, 10BASE-T/100BASE-TX PoE/1000BASE-T PoE

IR Illumination	
Type	Semi-covert 850 nm high power LEDs
IR intensity	Adjustable
Photocell	Adjustable Day/Night switching threshold level
Range	Up to approx. 30 m
Beam angle	Up to approx. 90°

Electrical Data	
Voltage supply	PoE (Class 0)
PoE standard	IEEE 802.3af
Power consumption	Max. 12.95 W

4) Without color information, or rather in black-and-white mode, the image quality in low light conditions will be much clearer (e.g. less color noise).

5) The function detects the presence of a face (Face Detection). The analysis of the manifestation of visible features and the link to the data of a person (Face Recognition) are not supported.

DF5210HD-DN/IR

Nightline

High Definition Camera, 2 MP, 1080p/60, H.264, Day/Night (ICR), Integrated IR Illumination, Motor-driven Varifocal Lens, One-Push Autofocus, P-Iris, PoE, Outdoor Wall Mount Bracket

Mechanical Data	
Dimensions	See technical drawings
Weight	Approx. 2.2kg (4.9 lb) with wall mount bracket
Color	White
Adjustment	2-axes
IP rating	IP66

Environmental Conditions	
Operating temperature	-40°C to +50°C (-40°F to 122°F), minimum start-up temperature: -30°C (-22°F)
Relative humidity	0% - 90% RH, non-condensing

Miscellaneous	
Ambient light sensor	Integrated
Microphone	Integrated
Local memory	50 MB RAM memory
Memory extension	microSDHC 32 GB, Class 10, UHS-I (optional) ⁶⁾
Configuration and live video	Via web browser (all major platforms)
Languages	German, English
Programming interface	Open platform for integration into 3rd party systems using API and ActiveX ⁷⁾
ONVIF compliance	Profile S

Approvals/Certifications	
Type	CE, FCC, ACA, UL, DIN EN 50130-4 compliant, IEC/EN 62471 compliant

6) The installation of the memory card should be done by a certified Dallmeier service partner.
 7) ActiveX is a trademark or registered trademark of Microsoft Corporation headquartered in Redmond, Washington, USA

DF5210HD-DN/IR

High Definition Camera, 2 MP, 1080p/60, H.264, Day/Night (ICR), Integrated IR Illumination, Motor-driven Varifocal Lens, One-Push Autofocus, P-Iris, PoE, Outdoor Wall Mount Bracket

Nightline

