

Delos International

DR-302K/303K



Specification

- n With keypad to input password.
- n With standard Wiegand output signal and several keypad formats, compatible with other access control system.
- n Build-in beeper and LED, display the working saturation directly.
- n Could be installed on EU/Asian back box.
- n Sustaining card's types : Mifare card
- n Build-in watchdog
- n Black or white optional

Application


This product is one of the classical readers with keypad, design for the control application.

DR-302K/303K

Electronic	
Power Supply	DC 9-15V
Rate Current	<200mA
Read Range	DR-702K read EM card 8~10cm DR-703K read Mifare card 5~8cm
Output Format	WG26/WG34
Input	LED control*2 Beeper control*1 Hold on*1
LED	Double color LED*1
Keypad	12

Model	
Dimension	9.5cm*9.5cm*2.0cm
Weight	180G
Installation	EU/Asian standard back box
Material	ABS+PC

Environment	
Temperature	-25°C~70°C
Humidity	<90%

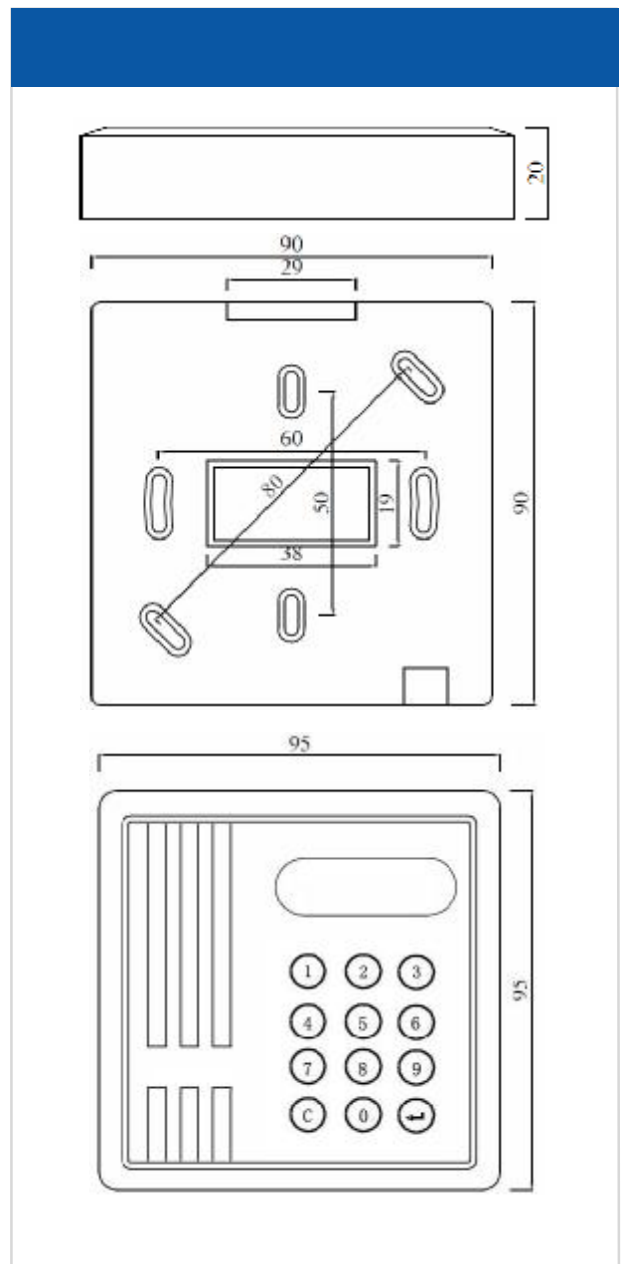

Order attention

- 1、Warranty: 1 year
- 2、Available type: see following pictures

