


1525L/1527L

Desktop

3000 Series 15" LCD Touchmonitor

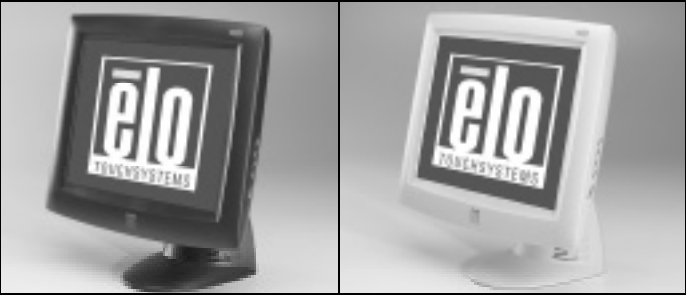

SPECIFICATIONS

Model	1525L/1527L	
Case/Bezel color	Dark gray/Beige	
Display type	Active matrix TFT LCD	
Display size	15" diagonal	
Useful screen area	Horizontal	11.9" (304 mm)
	Vertical	8.9" (228 mm)
Monitor dimensions	Width	15.4" (391 mm)
	Height (including base)	15.4" (391 mm)
	Depth (including base)	8.2" (208 mm)
Dimensional drawing number	MS500104 (available at www.elotouch.com)	
Optimal (native) resolution	1024 x 768 at 60, 70, or 75 Hz	
Other supported resolutions	1024 x 768 at 65 Hz (Sun); 832 x 624 at 75 Hz (Mac); 800 x 600 at 56, 60, 72, and 75 Hz; 720 x 400 at 70 Hz; 720 x 350 at 70 Hz; 640 x 480 at 60, 66 (Mac), 72, and 75 Hz	
Colors	16.7 million	
Brightness	LCD panel	300 cd/m ²
	LCD panel with touchscreen	AccuTouch: 255 cd/m ² (typical); IntelliTouch: 285 cd/m ² (typical)
Viewing angle (from center)	Horizontal (left/right)	±75° or 150° total
	Vertical (up/down)	70°/60° or 130° total
Contrast ratio	450:1	
Input video format	VGA/SVGA/XGA analog	
Input video signal connector	Mini D-Sub 15-Pin (female)	
Scanning frequency	Horizontal 31.5-60 kHz; vertical 56-75 Hz	
Video bandwidth	80 MHz	
Power supply	Internal DC power supply; external AC input 100-240 VAC, 50-60 Hz	
Power dissipation	30 W max.	
Temperature	Operating 10°C to 40°C; storage -30°C to 60°C	
Humidity	Operating 20% to 80%; storage 5% to 90%; noncondensing	
Weight (approx.)	Actual 15.2 lb (6.9 kg); shipping 21.6 lb (9.8 kg)	
Warranty	Monitor	3 years
	Touch technology	10 years IntelliTouch touchscreen, 5 years AccuTouch touchscreen
	Backlight lamp life	50,000 hours to half brightness
Other features	Digital on-screen display (OSD); two built-in 1 W speakers; removable base; sealing; VESA mounting; wall mountable when installed by qualified personnel User's controls: side: auto, enter, ±, menu, power; OSD: contrast, brightness, H/V position, color, temperature, clock, phase, recall, OSD time, language (English, German, Spanish, Japanese, French); OSD disable/enable: power, volume, and/or OSD menu	

ORDERING INFORMATION

	Touch Technology	Touch Interface	Surface Treatment	Elo Part Number	Agency Approvals
Dark gray	AccuTouch	Serial	Antiglare	E75784-000	UL, cUL, FCC, IC, CE, TÜV, VCCI, C-Tick
Dark gray	IntelliTouch	Serial	Antiglare	E70597-000	UL, cUL, FCC, IC, CE, TÜV, VCCI, C-Tick
Dark gray	AccuTouch	USB	Antiglare	947098-000	UL, cUL, FCC, IC, CE, TÜV, VCCI, C-Tick
Dark gray	IntelliTouch	USB	Antiglare	726256-000	UL, cUL, FCC, IC, CE, TÜV, VCCI, C-Tick
Beige	AccuTouch	Serial	Antiglare	C42910-000	UL, cUL, FCC, IC, CE, TÜV, VCCI, C-Tick
Beige	IntelliTouch	Serial	Antiglare	991740-000	UL, cUL, FCC, IC, CE, TÜV, VCCI, C-Tick

- Users should independently evaluate the suitability of the product for their application.
- All prices, models, and availability subject to change without notice.

- Stock quantities may be limited. Larger quantities are available within one week.
- For Product Agency Certifications refer to our Web site.