

Video Security

Signal Processing | eneo Switchers & Amplifiers

AVU-8/2EC

Video Switcher 8 Inputs, 2 Outputs in
Desktop Housing, 230V, Pantone Coolgray1C

Art-No. 76405



Features

8 Camera Inputs
2 Outputs (A and B)
Outputs Selectable as Spot or Sequence
Vertical Interval Switching



Selectable Dwell Time
Programmable Bypass Function
Supply Voltage: 15 VAC 50/60 Hz

Specifications

Dimensions (HxWxD)	See drawing
Supply voltage	15VAC, 50/60Hz
Bypass function	Manual programmable
Colour	Pantone Cool Gray 1C
Housing	Steel metal
Weight	1.5kg (with PSU)
Power consumption	approx. 4.5watts
Event Actions	Available in line-locked systems (cameras and switcher)
Signal-to-noise ratio	>60db
Temperature range	+10°C to +35°C
Dwell time	1 to 120 sec., adjustable for output A und B
Video outputs	2x 1Vp-p, (C)VBS, 75ohms BNC (A and B selectable as spot or sequence outputs)
Video signal bandwidth	10MHz +/-3db
Video inputs	8x 1 Vp-p, (C)VBS, 75 ohms, BNC
Cross talk	56 db at 4.5 MHz

Product Information

*) Power supply unit 230 VAC/15 VAC included

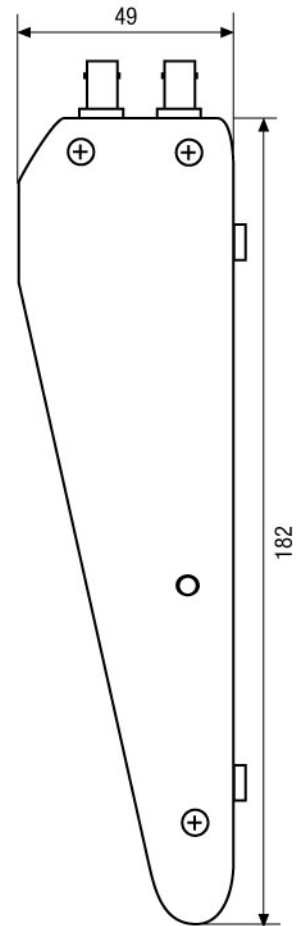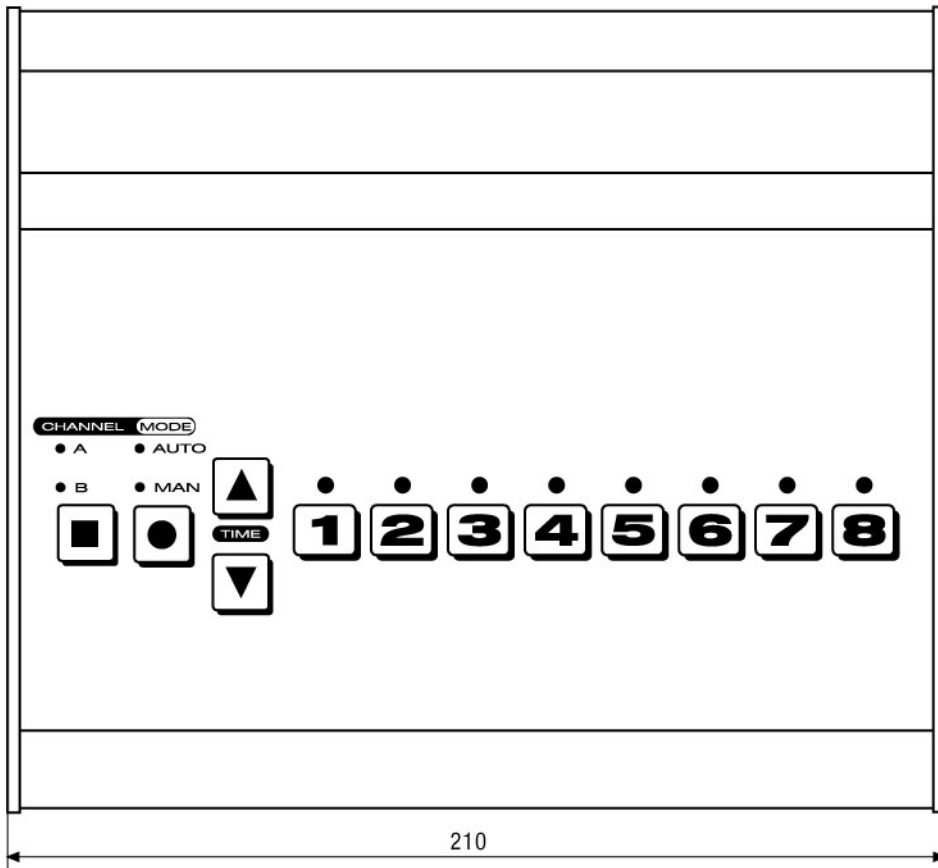

Maße/Dimensions: mm

VIDEOR TECHNICAL E. Hartig GmbH
 Carl-Zeiss-Straße 8 · 63322 Rödermark · Germany
 Telefon +49 (0) 60 74/8 88-0 · Telefax +49 (0) 60 74/8 88-100
 info@videortechnical.com · www.videortechnical.com

