

Video Security



CANDID M-03

1/3" B/W Camera with F1.0/3-8mm DC Lens
Candid Weatherproof Housing, 380TVL

Art-No. 96017



Features

B&W CCD Camera in Weatherproof Housing
Resolution of 380 Horizontal Lines
Electronic Shutter Control (ESC)
High Sensitivity

Lens: F1.0/3-8mm with DC Controlled Iris
Compact Version
Index of Protection: IP66/67

Specifications

System	CCIR
Imager	1/3" Interline transfer CCD
Active picture elements	Approx. 290,000; (H) 512 x (V) 582
Synchronization	Internal
Gamma correction	0.45
Horizontal resolution	380 TV lines
Sensitivity	0.17Lux at F1.0 / 0.25Lux at F1.2 (VT measurement result)
Electronic shutter control (ESC)	1/50 to 1/100,000 sec.
External adjustments	DC/ESC switch
Video output	1 Vp-p, CVS, 75 ohms
Lens	F1.0/3-8 mm with DC controlled iris
Horizontal angle of view	91°-36°
Cable entry	Wiring for video and voltage supply made, accessible from outside
Housing	Aluminium with plastic front and back (Makrolon)
Heater/sunshield	Yes (12 V heater)
Colour	RAL 9016 (Body) RAL 7035 (Front and back) RAL 7037 (Inner ball, fixing ring)
Protection rating	IP 66/67




CANDID M-03

(Specifications continued)

Supply voltage	12 VDC (+/-10%)
Power consumption	Approx. 8watts
Temperature range	-30°C to +50°C
Dimensions (HxWxD)	See drawing
Weight	1.2 kg
Parts supplied	3mm Allen wrench key, Bag of screws

Accessories

73546 / VT-PM4	Pole Mount Adapter for VHU Housing Series (100-180mm Pole), RAL7035
79494 / VHU-NT1	Power Supply Unit for Candid Housing Series 230VAC/12VDC-14VAC(Camera/Heater)

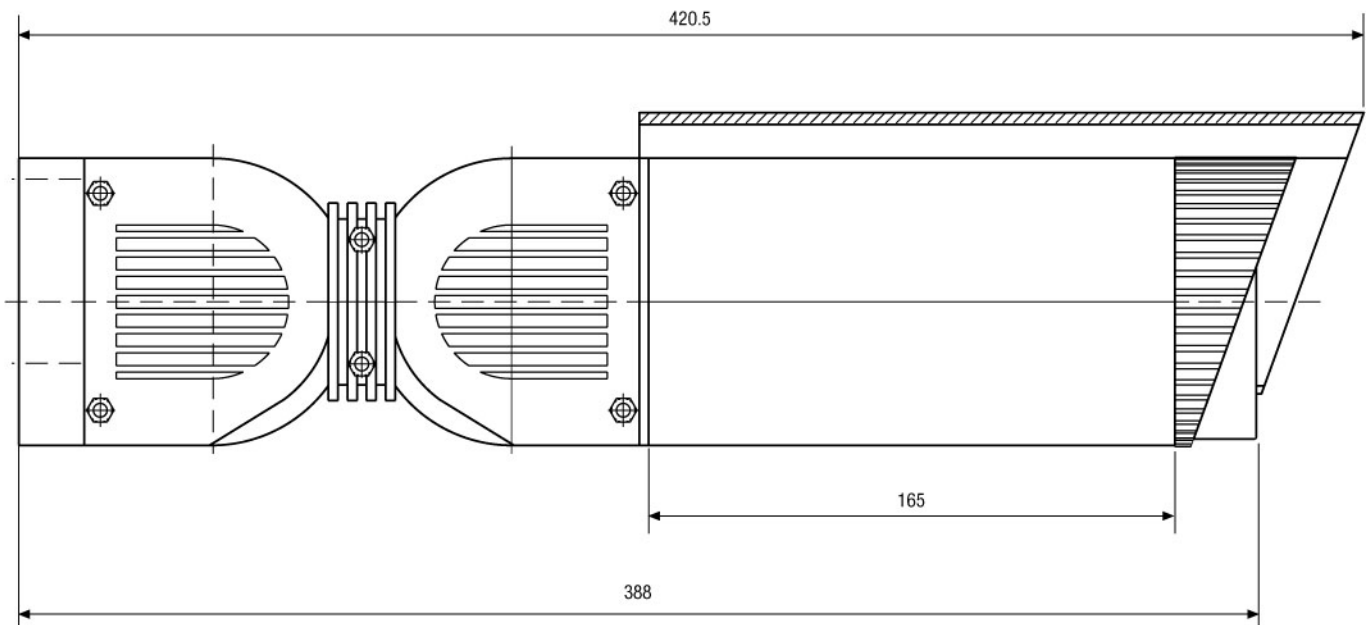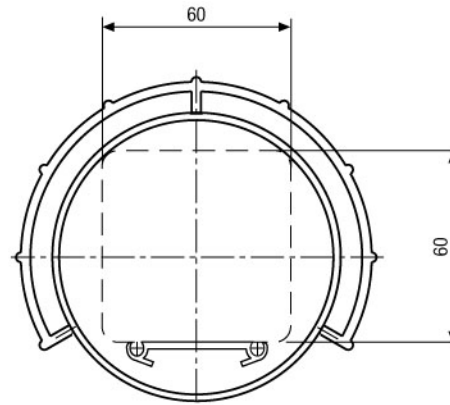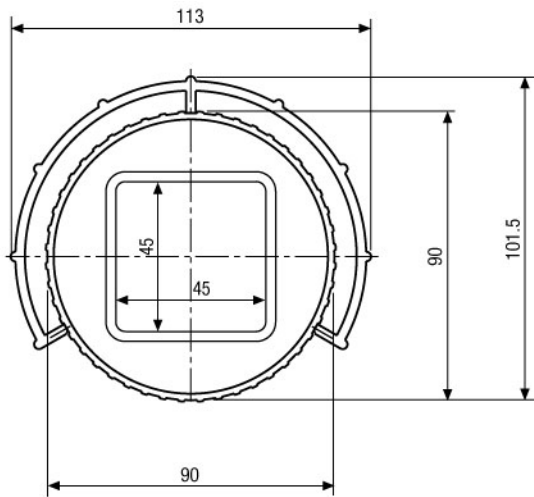

Maße/Dimensions: mm

VIDEOR TECHNICAL E. Hartig GmbH
 Carl-Zeiss-Straße 8 · 63322 Rödermark · Germany
 Telefon +49 (0) 60 74/8 88-0 · Telefax +49 (0) 60 74/8 88-100
 info@videortechnical.com · www.videortechnical.com

