

Video Security

Network Cameras | eneo Network Cameras

ENC-1003L

1/3" Network Colour Camera w. CS Mount,
integr. Web Server, 12VDC/230VAC, 480TVL

Art-No. 91461



Features

1/3" CCD Colour Camera
Horizontal Resolution of 480 TV Lines
Automatic Shutter Control (AES)
C/CS Mount
MJPEG Compression
Simultaneous Video and Audio Signal Transmission

E-Mail and FTP Transmission of Important Events
Activity Detection
Ethernet Interface: 10/100Base-TX
Supports Various Network Environments
CF Socket for Local Video Storage by CF Cards

Specifications

System	CCIR/PAL
Imager	1/3" Sony Super HAD Interline Transfer CCD
Resolution	480 TV lines (camera) 720x576, 352x288
Sensitivity at 50% video signal	1.1Lux at F1.2 (VT measurement result)
Automatic shutter control (AES)	1/50 - 1/100,000Sec.
Activity detection	Integrated motion detector
Lens mount	C/CS
Usable iris controls	Manual/DC controlled iris
Secondary Storage	Via CF card
Recording	on PC with Viewer Software or on CF Card on camera side
Video output	1 Vp-p, CVBS, 75 ohms, BNC
Compression standard	MJPEG
Frame rate	25 frames/sec. max.(recording mode), up to 15 frames/sec. (streaming mode)
Transmission rate	up to 15 frames/sec.
Video ring buffer	Stores alarms up-to 3 min.
Image display	Via Web Browser or Lan-Cam-Viewer Software
Alarm input	1 (software controlled)

ENC-1003L

(Specifications continued)

Alarm outputs	Open collector (5V / 0.02A max.)
Alarm handling	Automatic connection setup to a specified IP address
Ethernet interface	10/100 Base-TX, RJ45
Ethernet protocols	TCP, IP, ARP, ICMP, FTP, DHCP, PPP, HTTP, IGMP, DNS, DNNS
Software upgrade	Via CF card (FAT16 formatted)
Operation protection	Multilevel and Multiuser - Password protected
Serial interfaces	RS-232, RS-485, RJ 45 connector
Supply voltage	12VDC +/-10% (Power supply unit included)
Power consumption	Approx. 3.5watts
Camera mount	CS 1/4" - 20 UNC thread on bottom side
Housing	metal
Colour	Grey
Temperature range	5°C ~ 50°C
Dimensions (HxWxD)	57x70x135mm
Weight	Approx. 500g
Parts supplied	Lan-Cam-Viewer Software, Power supply 230V/50Hz - 2A, C/CS mount ring

Accessories

71852 / CF CARD/128	CF Memory Card 128MB for ENC-1001L, ENC-1002L, ENC-1003L
71853 / CF CARD/256	CF Memory Card 256MB for ENC-1001L, ENC-1002L, ENC-1003L
71856 / DNR-108/80	Digital IP Recorder (8 Channel), 80Gb 12VDC/230VAC
91439 / ENC-WLAN CARD	CF Wireless LAN Card
76011 / ZELARIS_AC S	Surveillance Software for Network Cameras from Eneo, Axis
76012 / ZELARIS_AC C	Client Software for Zelarlis_AC S
76023 / ZELARIS_AC SMO	Site Map Option for Zelarlis_AC S
43249 / F07Z07NDDC-NFS	F1.3/7.5-50mm DC Lens/var. Focal Length with No Focus Shift, 1/2" CS Mount
43251 / G04Z03NDDC-NFS	F1.2/4.5-12.5mm DC Lens/variable Focal Length, No Focus Shift, 1/2" CS Mount
43252 / G04Z03M-NFS	F1.2/4.5-12.5mm Lens, Var. Focal Length with No Focus Shift, 1/2", CS Mount

Accessories of


71856 / DNR-108/80	Digital IP Recorder (8 Channel), 80Gb 12VDC/230VAC
71875 / DNR-108/80W	Digital W LAN IP Recorder (8 Channel), 80Gb, 12VDC/230VAC

Product Information

Viewer Software for the recording of upto 4 cameras ENC-1003L

System requirements for the Viewer Software:

- Standard PC with P-IV processor and >1.8GHz system clock
- Windows 2000 or Win XP
- Network connection 10/100 Base-Tx
- Internet Explorer 5 or higher
- Hard disk 80Gb, depend on recording demand
- RAM 512Mb (recommended)

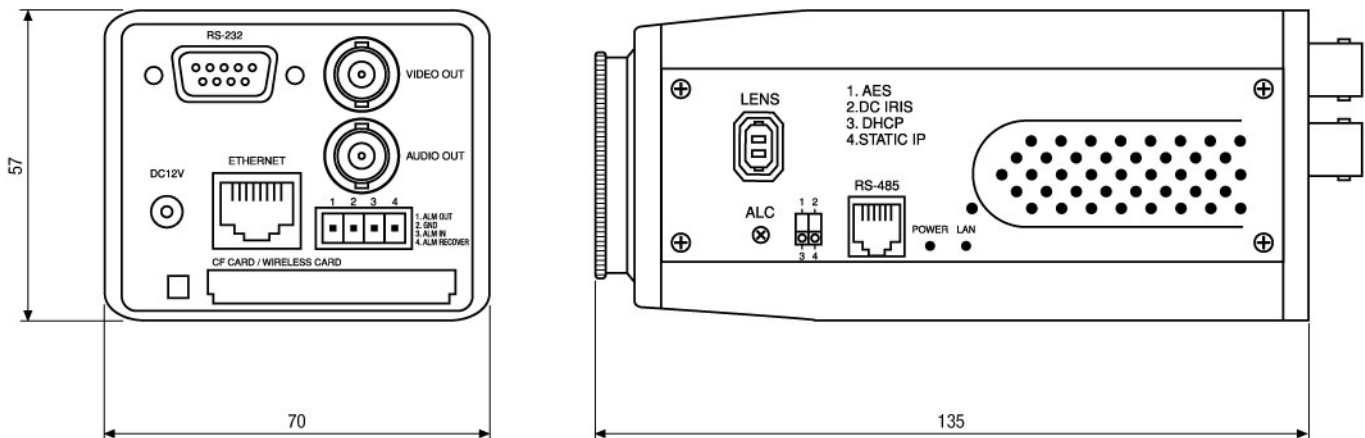

Maße/Dimensions: mm

VIDEOR TECHNICAL E. Hartig GmbH
 Carl-Zeiss-Straße 8 · 63322 Rödermark · Germany
 Telefon +49 (0) 60 74/8 88-0 · Telefax +49 (0) 60 74/8 88-100
 info@videortechnical.com · www.videortechnical.com