



FXD-1102

Article-No.: 92717

1/3" Network Dome, Fixed,
Day&Night, 4mm , 1600x1200,
vandal resistant, ONVIF

Mainfeatures

1/3" 2 megapixel CMOS network dome
Simultaneous video streaming (H.264/MJPEG/MPEG-4)
e-PTZ support
Integrated motion detection
Alarm-recording (NAS, ISCSI)
Power over Ethernet (PoE)

Resolution 1600 x 1200 (HD 720p)
Electronic day&night switching
Privacy zone masking
For indoor use, vandal resistant IK10
ONVIF conformity
Client management software included

Specifications

| | |
|-----------------------------------|--------------------------------|
| Series | eneo F |
| System | day&night |
| Sensor size | 1/3" |
| Imager | CMOS |
| Sensitivity (at 50% video signal) | 0,5 Lux |
| Sensitivity (at 50% video signal) | at F1.2 |
| Digital Noise Reduction (DNR) | no |
| Low speed shutter | yes |
| Low speed shutter | 1/25sec. ~1/100,000sec. |
| Backlight compensation | no |
| Wide Dynamic Range (WDR) | no |
| IR cut filter | OLPF (Overlay Low Pass Filter) |
| Mirror function | yes |
| Resolution max. | 1600 x 1200 |
| Resolution | 2 megapixels |
| Image transmission rate max. | 30 B./Sek. |


Specifications (continued)

| | |
|-------------------------------|---|
| Privacy zones masking | 4 areas selectable |
| Activity detection | yes |
| Analysis Functions | motion detection |
| Text display | supplied |
| Menu languages | English, Chinese |
| Video outputs | - |
| Audio support | no |
| Alarm inputs | - |
| Alarm outputs | - |
| Internal storage | no |
| Compression standard | H.264, MJPEG |
| Ethernet interface | 100Base-TX |
| Network protocols | TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTCP, PPPoE, FTP, SMTP, NTP, SNMP, HTTPS, SIP, SRTP, IPv6, IPv4 |
| Lens type | fixed focal length |
| Focal length | 4 mm |
| Horizontal angle of view | 73° |
| Digital zoom | no |
| Illumination | no |
| Recording | permanent, movement, timer, manual |
| Serial interfaces | no |
| Remote configuration | remote software, via web browser |
| Password protection | yes |
| PTZ support | yes |
| Supply voltage | 12VDC +/- 10%, |
| Supply voltage | 12VDC, PoE |
| Power over Ethernet | yes |
| Heater | no |
| Power consumption | 4watts |
| Mounting | wall mount, ceiling mount |
| Temperature range (operation) | -10°C ~ +60°C |
| Vandalism resistant | yes |
| Housing | outdoor, indoor |
| Housing material | metal |
| Colour (housing) | RAL9010 |
| Colour (bubble) | clear |
| Protection rating | IP66 |
| Management Software Support | Finitra, Zelaris |
| SDK | available, SDK incl. HTTP-API and ActiveX |
| ONVIF | core specifications 1.02 |
| Certificates | IK10, EN 50102, IEC 60068-2-75 Eh, 50, CE |
| Dimensions (HxWxD) | 100x97.5x46.5mm |
| Weight | 250 g |

Optional Accessories

| <i>Image</i> | <i>Artikel-Nr. / Typ</i> | <i>Description</i> |
|---|--------------------------|--|
|  | FINITRA | Video Management Software, for eneo F-Series |
|  | FNR-4004/500 | Network Video Recorder, 4xIP, 1600x1200 (@2 Channels), H.264, 500GB, 12VDC |
|  | FNR-4016/500 | Network Video Recorder, 16xIP, 1600x1200 (@4 Channels), H.264, 500GB, 230VAC |
| | POE20U-560(G) | High PoE Midspan, 1 Port, 19.6W, Gigabit, 100-240VAC |
| | POE125U-8C | PoE Midspan, 8 Ports, 15.4W, Gigabit, 100-240VAC |

Technical Drawing

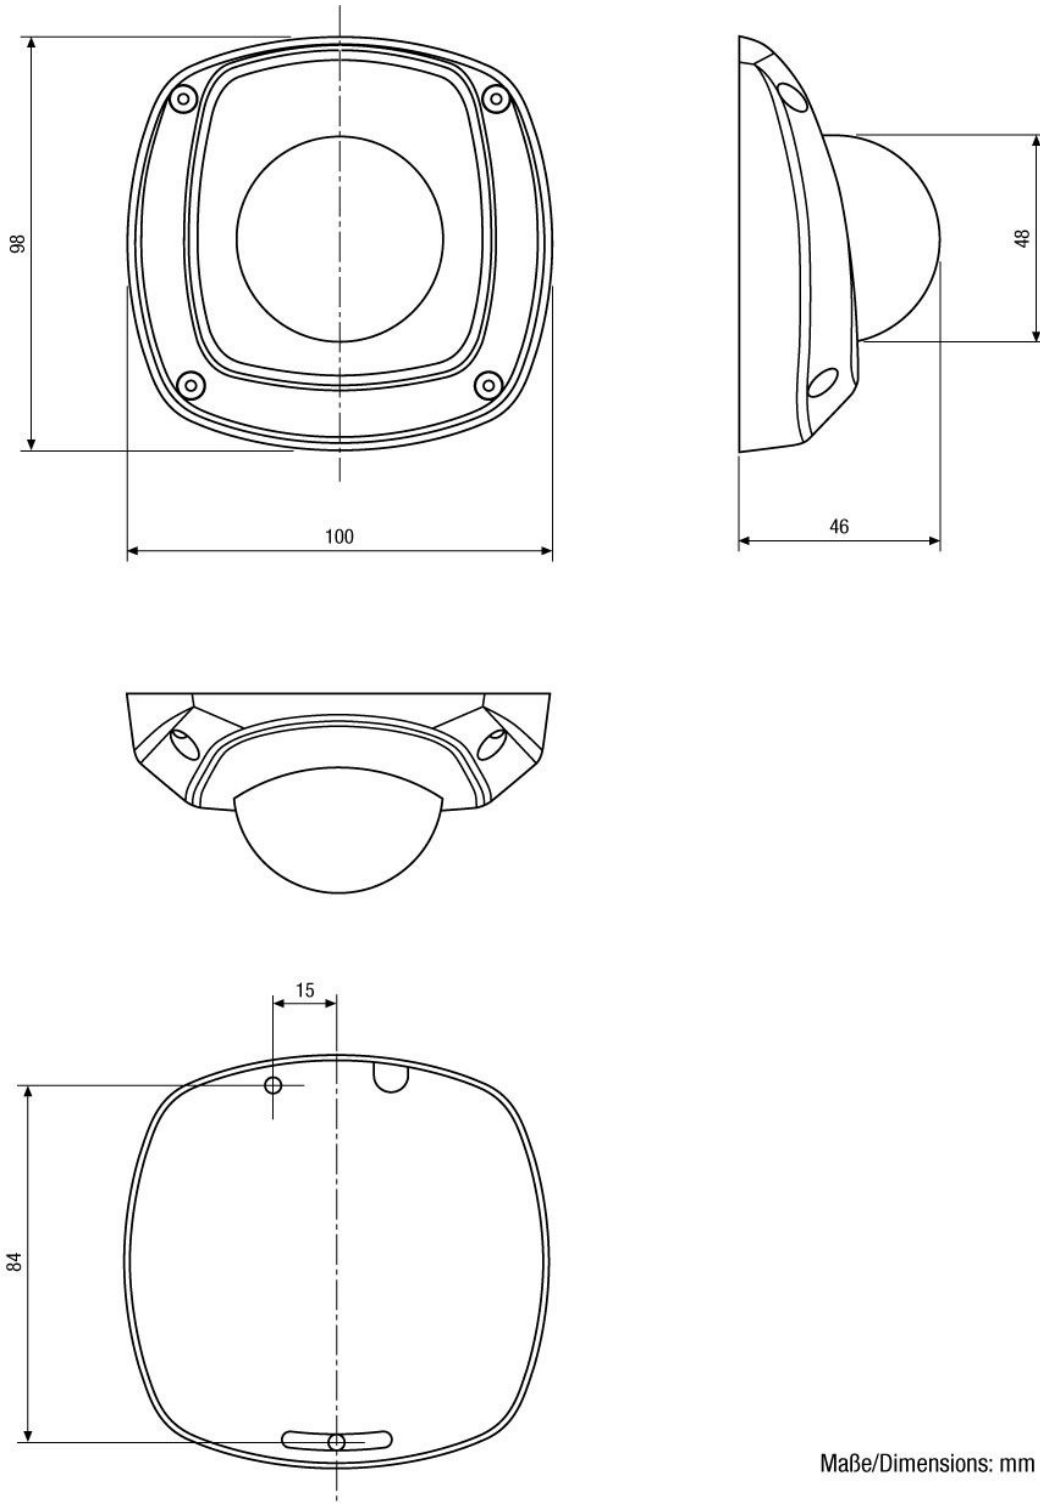

Maße/Dimensions: mm



Your partner for eneo products:

