

## DC Controlled Lenses

FDP-No.: 43129

### F03Z02NDDC

- Suitable for 1/2" and 1/3" Colour and B&W Cameras
- Variable Focal Length
- Aspherical Lens Elements
- CS Mount
- High Standard of Optical and Mechanical Quality
- Without Built-in Auto Iris Amplifier
- With 4-pin Connector
- Adjustable Slip-ring Mount for Cable Positioning




---

### Specifications:

---

Focal length (f)	2.8-6 mm
Aperture range (F)	F1.2-F64
Mount	CS
Nominal format size	1/3"
Flange focal length	12.5 mm
Horizontal angle of view at nominal format size	88.7°-44.2°
Minimum object distance (M.O.D.)	0.3 m
Screw-in depth	4.0 mm
Filter screw size	-
Cable length	Approx. 20 cm
Slip-ring mount	340°-360° Variable adjustment range
Iris control system	Galvanometer
4-pin plug	Standard
Temperature range	-20°C to +50°C
Dimensions (LxDxH)	60x43x37.5 mm
Weight	95 g

Accessories	
EDP No. / Type	Description
43094 ACB	Auto iris control box for DC iris lenses to AI output. With integrated Level and ALC adj. potentiom.

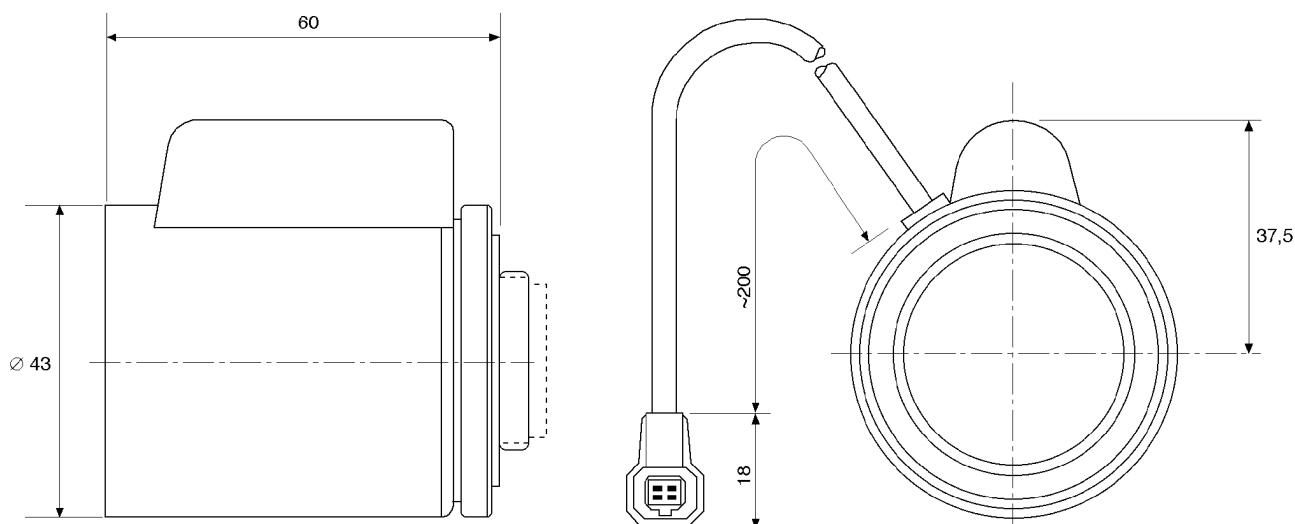

Maße/Dimensions: mm

e-mail: [info@eneo-security.com](mailto:info@eneo-security.com) • [www.eneo-security.com](http://www.eneo-security.com)