

ISM-52F0021WMA

SKU: 235524



1/2,8" Network Module Camera, 1920x1080, Day&Night,, WDR, 2,1mm, H.265, PoE, 12VDC

Main Features

1/2,8" 2.0 MP CMOS-Sensor	WDR 120dB, Smart BLC
Resolution max. 1920x1080 (Full HD)	Slot for Micro SD memory card
Board Camera 50x50x50mm	ONVIF conformance, PoE IEEE802.af, Cross Web-Browsing
Quad Streaming (H.265, H.264, MJPEG)	Audio-, Alarm- In- and Outputs
True Day & Night (TDN)	Privacy zones, password protection, Cross Web-Browsing
Noise Reduction (2D-/3D-DNR)	NDAA compliant

Specifications

DORI:	
Observe (62 px/m)	14 m
Recognize (125 px/m)	6,5 m
Identify (250 px/m)	2,9 m
Detect (25px/m)	36,5 m
Other	
Dimensions (HxWxD)	50x50x50mm
Alarm processing	recording internal storage (SD card),E-Mail,FTP,HTTP,HTTPS,alarm out
Resolution	1920x1080 (16:9),1280x720 (16:9),704x480 (4:3),640x480 (4:3),352x288 (4:3)

ISM-52F0021WMA

Continuation of the specifications

Imager	SmartSens,SC200AI,CMOS, CMOS
Automatic electronic shutter (ESC)	1~1/100.000Sek.
Illumination	no
Remarks	NDAA compliance under Section 889
User interface	Type B (white / blue)
Motion detector	yes
Image display	VerticalView 90°/270°
Iris control	no
Stream types	Quad Streaming
Digital noise reduction (DNR)	yes
e-PTZ support	yes
External connectors	Alarm output,Alarm input,Audio input/output,RJ-45,12VDC input (DC plug)
Flickerless function	yes
Backlight compensation	BLC
Parts supplied	manual,Connection cable set
Low speed shutter	automatic,yes
Manual electronic shutter (MES)	1~1/100.000Sek.
Menu languages	English,German,French,Russian,Chinese,Korean,Japanese
Mirror function	flip,mirror
Multicast compliant	yes
Network protocols	IPv4,IGMP,ICMP,TCP,UDP,DHCP,RTP,RTSP,RTCP,DNS,DVRNS,NTP,FTP,HTTP,HTTPS,SMTP,SSL,Zeroconf
Password protection	administrator & users
Privacy zone masking	Areas-ON/OFF switchable
SDK	upon request
Signal-to-noise ratio	50dB
Supply voltage	12VDC,PoE, 12VDC, PoE
Day&Night mode	Automatic,Day,Night
Text display	supplied
Web browser	MS internet Explorer: ActiveX ex 9.0,Safari: MJPEG setup limited,Mozilla: MJPEG setup limited,Google: MJPEG setup limited,Edge: MJPEG setup limited
White balance	Automatic
Wide Dynamic Range (WDR)	TWDR 120dB,True WDR, True WDR
Camera Type	Board Camera
Resolution Standard	HD 1080p
System	True Day&Night
Video compression	H.264, H.265, MJPEG
Image resolution max.	1920x1080
Image Transmission Rate	30 fps

ISM-52F0021WMA

Continuation of the specifications

Day&Night switch	ICR
Low Speed Shutter	yes
Digital Noise Reduction	yes
Backlight Compensation	BLC
Motion Detector	yes
Lens Type	fixed focal length
Focal Length	2,1 mm
Iris Control	no
Digital Zoom	yes
Horizontal Angle of View	140°
Vertical Angle of View	78°
MOD (Mininum Object Distance)	0,3 m
Illumination	no
Housing	without housing
Blower	no
Video outputs	no
Alarm inputs	1
Alarm outputs	1
Audio support	yes
Ethernet interface	100Base-TX, 10Base-T
Serial interfaces	Ethernet
Internal storage	microSDXC card
Analysis functions	Motion detection, Perimeter Intrusion Detection (PID), Tampering Detection (TD)
Power consumption	4.3W
Power over Ethernet	IEEE 802.3af
Vandal proof	no
Operating temperature	0°C ~ +40°C
ONVIF	ONVIF Profile S, ONVIF Profile T
Camera type	Platine
Audio	2 Way Audio
Remote configuration	Browser
Weight	125g


Optional Accessory

SKU	Name	Description
218218	eneo Site Manager	Management Software for eneo IP products

ISM-52F0021WMA

Technical Drawing

Maße: Dimensions: mm

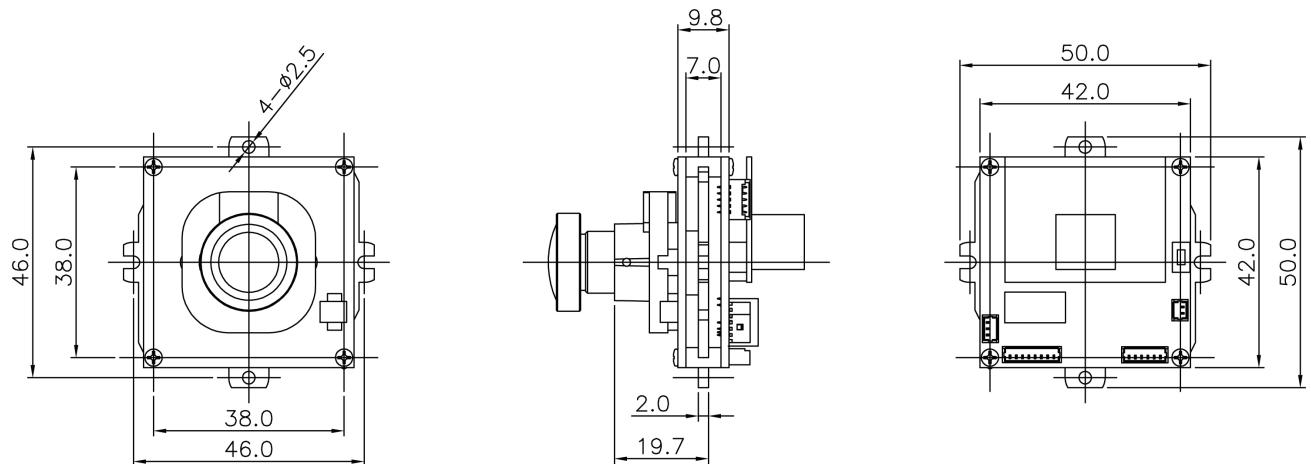

eneo is a registered trademark of
VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8

63322 Rödermark, Deutschland

Phone: +49 6074 - 888 - 300
Fax: +49 6074 - 888 - 100
E-Mail: info@eneo-security.com
Web: www.eneo-security.com

Stay informed and subscribe
to the eneo newsletter

