



NE-128

Article-No.: 70449

Voltage supply unit 230V/24VAC-5A, IP66

Main features


Voltage Supply Unit for Driven Dome Cameras
Input Voltage: 230VAC
Data Cable Loop-tru Terminal Inside

Fastrax/Spectra, Esprit, P/T Series VPT-40/41/-42
Output: 24VAC/5A
Index of Protection: IP66

Specifications

| | |
|----------------------|---|
| Voltage input | 230VAC/50Hz |
| Output voltage | 24VAC |
| Cable entries | 2x M20x1.5mm 1x M16x1.5mm |
| Internal connections | 230VAC, 24VAC, RS-232/RS-485 terminal clamps |
| Protection rating | IP66 |
| Current supply | 5A |
| Temperature range | -30°C to +50°C (at 4A max.) -30°C to +30°C (at 5A load) |
| Housing | Plastic (ABS) |
| Colour | light grey |
| Dimensions (HxWxD) | 90x160x120mm |
| Weight | 2.1kg |
| Certificates | CE |

Technical Drawing

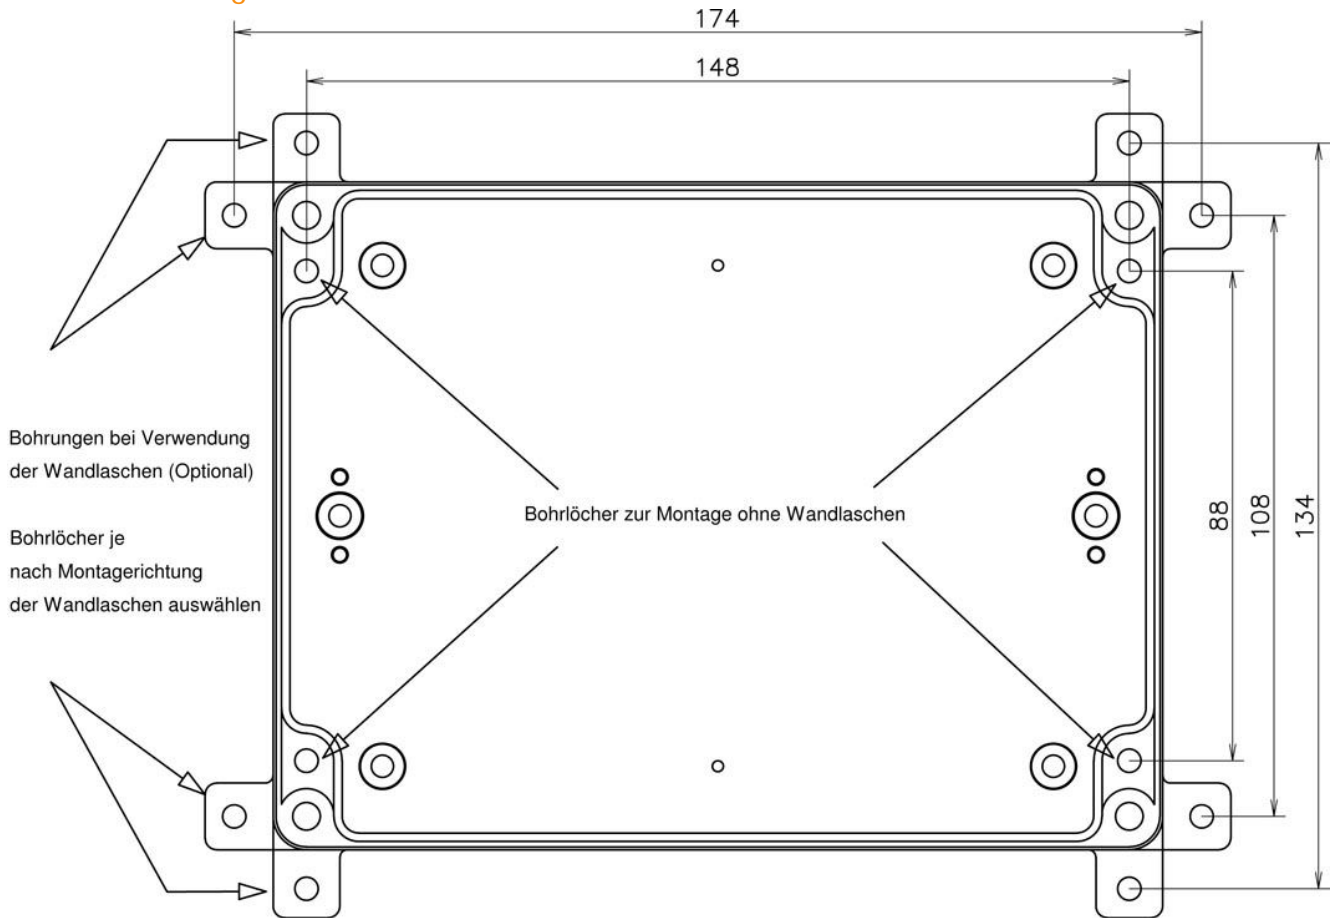

Maße/Dimensions: mm

Your partner for eneo products:

