

Video Security

Cameras | Security Cameras

VKC-1325

1/3" Colour Camera w. Pixim Technologie,
PAL/NTSC, 12VDC/24VAC, 480TVL

Art-Nr. 91939



Lens is not included with the camera

Features

Superior Images even in Harsh Backlight Conditions
DPS (Digital Pixel System)
Wide Dynamic Range: 95dB (14bit), 120db max.
Resolution of 480 Horizontal Lines
Sensitivity of 0.6 Lux (F1.2)
Back Light Compensation (BLC)

Automatic Gain Control (AGC)
Horizontal and Vertical Aperture Correction (APC)
Auto White Balance (ATW)
Electronic Shutter Control (ESC)
On-screen Menu Control and Camera ID Display
C/CS Mount, Supply Voltage: 12VDC or 24VAC

Specifications

System	PAL or NTSC, selectable
Imager	1/3" CMOS, DPS Technology
Active picture elements	Approx. 400,000, (H) 720 x (V) 540 (eff.)
Signal processing	DSP
Synchronization	Internal/Line lock
Sensitivity at 50% video signal	0.6Lux at F1.2
Horizontal resolution	480 TV lines
Dynamic range (WDR)	95db (14bit) typ., 120db max.
Lens adjustment	Automatic adjustment of the lens to the camera
Automatic gain control (AGC)	7~24db, Modes: Low, Motion, DNR (Digital Noise Reduction)
White balance (ATW)	Range: 2800~6500K, to 2500~9500K switchable
Signal-to-noise ratio	50db (AGC OFF)
OSD function control	Main menu: Language, AGC, White balance range, Flickerless, Synchronization: Internal/Line-lock with V-Phase adjustment, Text 15-characters and position. Video menu: Level, Sharpness, Chroma. Installer menu: Colour bars, Mirror image, BLC zones, Colour/b&w
Menu languages	English, German, French, Spanish



VKC-1325

(Specifications continued)

Aperture Correction (APC)	Horizontal and vertical
Backlight compensation (BLC)	8 adjustable zones, ON/OFF switchable
Lens mount	CS
Usable iris controls	Manual iris, DC controlled iris
External adjustments	Menu cursor and setting buttons, PAL/NTSC switch, Flange focus
Video output	1Vp-p, CVBS, 75ohms, BNC
External connections	DC Iris control (4-pin), Video (BNC), Power input
Camera mount	1/4" - 20 UNC thread on top and bottom
Supply voltage (+/-10%)	12VDC/24VAC +/-15%
Power consumption	Approx. 5,0watts
Temperature range	-10°C to +50°C
Dimensions (HxWxD)	See drawing
Colour	RAL 7035
Weight	350g

Accessories

70769 / WD-22	Wall Mount with Ball Joint,
70448 / VT-PS12DC-6	Plug-in Power Supply 100-240VAC/12VDC
77772 / VT-PS12DCDT	PSU 12VDC/0,5A, Desktop Version, 1.8m
43105 / G0216NDAI	F1.6/2.6mm AI Lens, 1/2" CS Mount

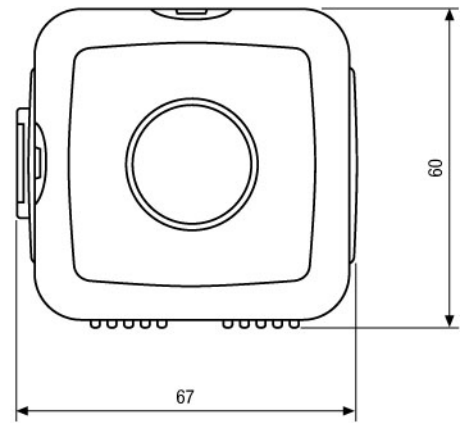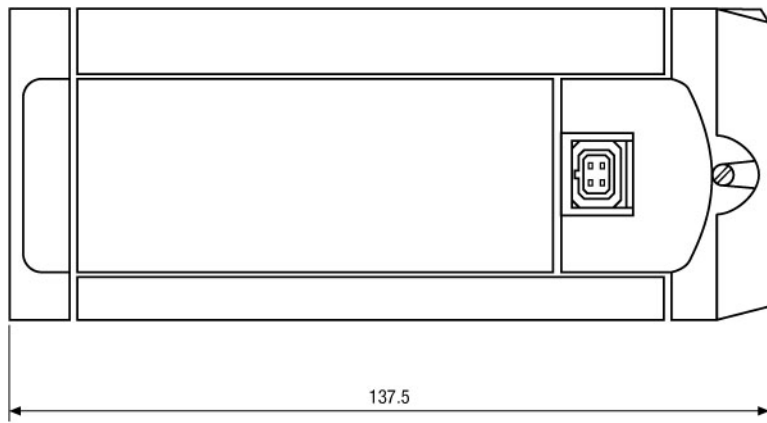

Maße/Dimensions: mm