

# VKCD-1319SM/3.6

Home | Security | Dome Cameras | Fixed

VKCD-1319SM/3.6  
1/3" Dome, Fixed, Colour, clear, 3.6mm, 540TVL,

12VDC

**Art-Nr. 92155**



Wall mount is not included with the pole bracket

## Main Features

|                                    |                                 |
|------------------------------------|---------------------------------|
| For Drop Ceiling or Wall Mount     | Automatic Shutter Control (AES) |
| Clear bubble with Inner Liner      | Automatic White Balance (ATW)   |
| Resolution of 540 Horizontal Lines | Backlight Compensation (BLC)    |
| Sensitivity of 0.6Lux (F2.0)       | Easy installation               |
| Built-in Lens F2.0/3.6mm           | Supply Voltage: 12VDC           |
| Digital Signal Processing (DSP)    | Option: Wall Mount Bracket      |

## Specifications

|                                   |  |
|-----------------------------------|--|
| Video standard                    | PAL  |
| System                            | Colour                                     |
| Sensor size                       | 1/3"                                       |
| Imager                            | CCD, Sony Super HAD Interline Transfer CCD |
| Synchronization                   | Internal                                   |
| Sensitivity (at 50% video signal) | 0.2Lux at F1.2, 0.6Lux at F2.0             |
| Horizontal resolution             | 540 TVL                                    |
| Rotation range                    | 110°                                       |
| Tilt range                        | 65° (+25° ~+90° from horizontal level)     |
| Automatic gain control (AGC)      | 28dB, ON/OFF switchable                    |
| Automatic shutter (AES)           | 1/50 ~1/100.000sec.                        |
| Low Speed Shutter                 | no   |
| Digital Noise Reduction (DNR)     | no   |

# VKCD-1319SM/3.6

(Continuation Specifications)

|                               |                                |
|-------------------------------|--------------------------------|
| White balance (ATW)           | 2500 ~8000K (Automatic)        |
| Backlight compensation        | BLC                            |
| Wide Dynamic Range (WDR)      | no                             |
| IR cut filter                 | standard                       |
| Video outputs                 | CVBS, 1Vp-p, CVBS, 75ohms      |
| Lens mount                    | integrated lens                |
| Lens type                     | fixed focal length             |
| Lens                          | F2.0/3.6mm                     |
| Aspherical technology         | no                             |
| Focal length                  | 3,6 mm                         |
| Horizontal angle of view      | 68°                            |
| Iris control                  | no                             |
| MOD (Minimum object distance) | 0,1 m                          |
| Filter screw size             | not available                  |
| External connections          | Video (BNC), 12VDC (DC socket) |
| Serial interfaces             | no                             |
| Temperature range (Operation) | -10° ~+50°C                    |
| Heater                        | no                             |
| Protection rating             | IP40                           |
| Supply voltage                | 12VDC                          |
| Power consumption             | 1.8watts max.                  |
| Vandalism resistant           | no                             |
| Colour (bubble)               | clear                          |
| Camera fixing                 | no                             |
| Mounting                      | surface mount                  |
| Housing                       | Indoor                         |
| Housing material              | Plastic                        |
| Colour (housing)              | light grey                     |
| Dimensions (DxH)              | See drawing                    |
| Weight                        | approx. 150g                   |
| Certificates                  | CE                             |


## Optional accessories

|       |              |  |
|-------|--------------|--|
| 70535 | VT-PS12DC-8  | Plug-in Power Supply Unit 100-240VAC 12VDC (1.0Amp), Regulated, with DC Plug |
| 70495 | VT-PS12DC-7  | Plugable PSU w. Cont. & UK Mains plug-in 100-240VAC/12VDC-1.25A, Regulated   |
| 77773 | VT-PS12DCDT1 | PSU 12VDC/1.0A, Regulated, Desktop Version, 1.8m Cables each w. open ends    |
| 91805 | VKCD/WMB-1   | Wall Mount for VKD-136, VKCD-143, VKCD-144/HR                                |

# VKCD-1319SM/3.6

Home | Security | Dome Cameras | Fixed

## Technical drawing

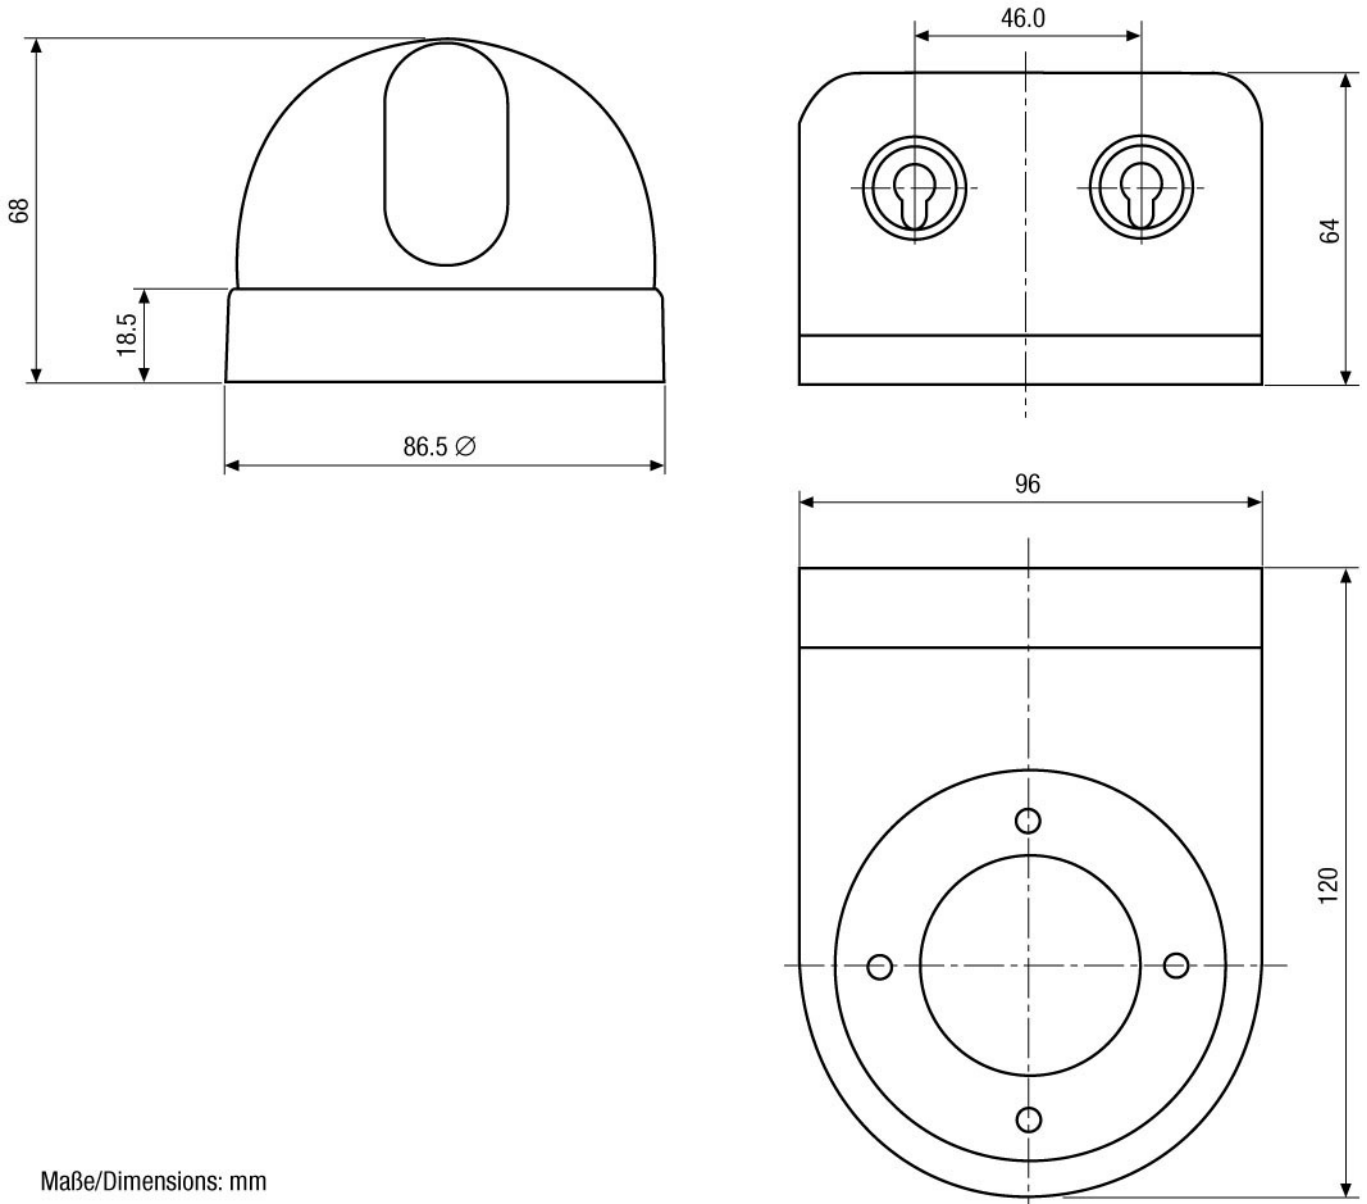

Maße/Dimensions: mm