



## VMC-26LCD-PWCL1

Article-No.: 90548

26" TFT/LCD Public View Colour Monitor,  
1366x768 Pixels, 24VDC

### Mainfeatures

Professional Monitor with Built-in Camera  
Switchable PAL/NTSC Selection  
Multiple Language On-screen Menu Driven Set-up  
4x CVBS Inputs, Alarm and Audio Inputs  
Integrated 1/3" Colour Camera with 4-9mm Lens

26" Display Screen Size 16:9 (4:3) Image Display  
Full and Multi Screen Display / Zoom Function  
Motion Detection & Integrated Memory Function  
VCR Input and Output  
Composite Input for External Camera

### Specifications

Series	Combo System
Certificates	CE
Video inputs (type)	CVBS
Response time typical	6.5 ms
PC interfaces	no
Contrast ratio typical	2500:1
Brightness typical	450 cd/m <sup>2</sup>
Housing material	Metal
Colour (housing)	silver grey
Screen size	26"
Viewing angle bottom	88°
Viewing angle right	88°
Viewing angle top	88°
Viewing angle left	88°
Resolution pixels	1366 x 768
Audio inputs	2
Video inputs (amount)	internal and external camera (VCR)




## Specifications (continued)

Serial interfaces	no
Interfaces external storage	-
Remote access	no
Compression standard	-
Intergrated writer	no
Control units (external)	Remote Control
Series	Combo System
Video standard	PAL/NTSC
Display element	Colour TFT/LCD
Screen size	26"
Screen Size (cm)	66.04 cm
Active display area (H/V)	575x323mm
Pixel format	1366 (H) x 768 (V) / 0.4215x0.4215mm
Pixel fault class	ISO 13406-2, Class II
Screen formats	16:9, 4:3
Scanning method	Digital progressive scan (Frame/Motion mode)
Resolution pixels	1366 x 768
Colour scales	16.7Mio (8 Bit)
Contrast ratio typical	2500:1
Brightness typical	450 cd/m <sup>2</sup>
Viewing angle top	88°
Viewing angle right	88°
Viewing angle bottom	88°
Viewing angle left	88°
Light source	6UCCFL
Response time typical	6.5 ms
PC interfaces	no
Video inputs (type)	CVBS
Video inputs (amount)	internal and external camera (VCR)
Video outputs	internal camera
Audio inputs	2
Audio output power	2x 5W
Menu languages	English, German, French, Spanish, Italian, Polish
System	Colour
Video outputs (type)	CVBS
Intergrated writer	no
Interfaces external storage	-
Serial interfaces	no
Compression standard	-
Control units (external)	Remote Control
Remote access	no
Supply voltage	24VDC, 230VAC
Power consumption	130W
Temperature range (Operation)	0 ~ +40°C
Housing material	Metal
Mount	VESA standard (4 threads M4, 100x100mm)
Colour (housing)	silver grey
Dimensions (HxWxD)	See drawing


## Specifications (continued)

Weight	14.5kg
Parts supplied	Power supply unit with power cord, VGA cable, IR remote control unit, Driver Diskette, Manual
Certificates	CE
Options	Table stand, Wall and ceiling brackets

## Optional Accessories

Image	Artikel-Nr. / Typ	Description
	LCD-ST/PW23/26	Desktop Mount for 23" and 26" LCD Monitor Series, Aluminium Finish
	VMC-LCD/WMB-3	Wall Mount Bracket, Pan and Tilttable for LCD Monitors
	VMC-LCD/CMB-2	Ceiling Mount Bracket, Pan and Tilttable for LCD Monitors from 23"

## Technical Drawing

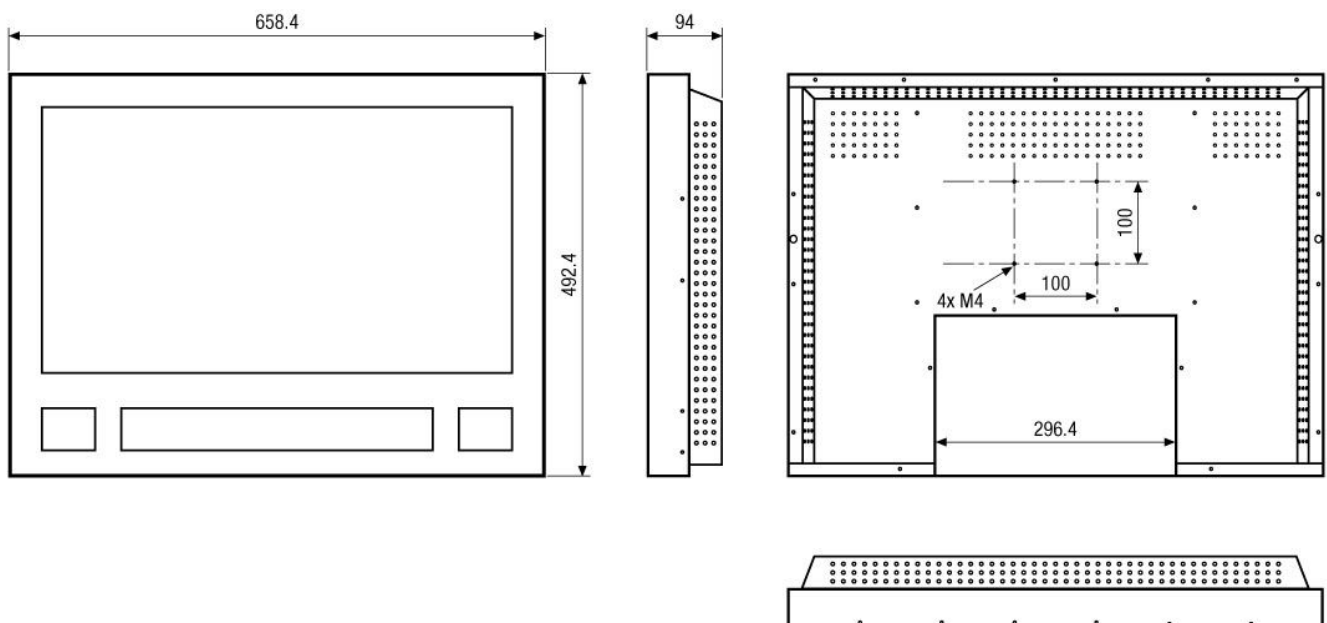



Your partner for eneo products:

