



VMC-32LCD-PW2

Article-No.: 90568

32" (81.3cm) Public View Monitor, 16:9,
4x BNC, Y/C, VGA, 2x Audio, 24VDC

Mainfeatures

TFT LCD colour MUX monitor
Resolution of 1366x768 px.
Main & sub window display
Image capture & Replay function
VCR and alarm input & output

High brightness & contrast
Full screen and high resolution quad display
Video loss & Motion detection alarm
Screen freeze capability
Integrated loudspeakers

Specifications

Series	Combo System
Certificates	CE
Video inputs (type)	composite (CVBS), Y/C, VGA, component (YPbPr)
Response time typical	8 ms
PC interfaces	VGA
Contrast ratio typical	4000:1
Brightness typical	450 cd/m ²
Housing material	metal
Colour (housing)	silver grey
Screen size	32"
Screen Size (cm)	81.3 cm
Viewing angle vertical	178°
Viewing angle horizontal	178°
Resolution pixels	1366 x 768
Audio inputs	2
Video inputs (amount)	4
Serial interfaces	no




Specifications (continued)

Interfaces external storage	-
Remote access	no
Compression standard	-
Integrated writer	no
Control units (external)	remote control
Supply voltage	24VDC
Series	Combo System
Video standard	PAL/NTSC
Display element	Colour TFT/LCD
Screen size	32"
Screen Size (cm)	81.3 cm
Active display area (H/V)	697.7x392.2mm
Pixel format	1366 (H) x 768 (V), RGB vertical stripes 0.51x0.51mm
Pixel fault class	ISO 13406-2, Class II
Screen formats	16:9, 4:3
Scanning method	Digital progressive scan (Frame/Motion mode)
Resolution pixels	1366 x 768
Colour scales	16.7Mio (8bit)
Contrast ratio typical	4000:1
Brightness typical	450 cd/m ²
Viewing angle vertical	178°
Viewing angle horizontal	178°
Light source	4UCCFL
Response time typical	8 ms
PC interfaces	VGA
PC interfaces	Analog RGB (0.714Vp-p, 75ohms), H & V sync. (TTL), 15-pin D-Sub
Video inputs (type)	composite (CVBS), Y/C, VGA, component (YPbPr)
Video inputs	4x CVBS: 1Vp-p, 75ohms, BNC Y/C: Y= 0.7Vp-p, C= 0.3Vp-p, 75ohms, 4-pin MiniDIN. Loop-through inputs, automatic 75ohms termination
Component video input	1Vp-p, 75ohms. 3x Cinch (1080i, 720p, 480p, 480i)
Video inputs (amount)	4
Video outputs	3x 1Vp-p, CVBS, 75ohms, BNC (Monitor, Record, Spot)
Audio inputs	2
Audio output power	2x 5W
Alarm output	1x NO/NC contact
Menu languages	German, English, French, Spanish, Italian, Polish, Russian
Integrated writer	no
Interfaces external storage	-
Serial interfaces	no
Compression standard	-
Multiplexer	Built-in 4-ch. real time multiplexer
Digital zoom	2x
Recording	Up to 60 still images
External adjustments	On-screen control, Input selection, Multiplexer control, Digital Zoom, Recording and playback, Alarm reset, ON/OFF
Control units (external)	remote control


Specifications (continued)

Remote access	no
Remote control	Wireless remote control enabled
Password protection	key lock and menu password enabled
Supply voltage	24VDC
Power consumption	164W
Temperature range (operation)	0°C ~ +40°C
Housing material	metal
Mount	VESA standard (4 threads M4, 100x100mm)
Colour (housing)	silver grey
Dimensions (HxWxD)	see drawing
Weight	18.5kg
Parts supplied	PSU 100~240V with power cord, Driver CD, VGA cable, IR remote control unit, Multiple language manual
Certificates	CE
Options	Wall mount bracket / Table stand

Optional Accessories

Image	Artikel-Nr. / Typ	Description
	LCD-ST/PW	Desktop Mount for LCD/Plasma Monitors >30", PW(A) Series, Aluminium Finish
	VMC-LCD/WMB-3	Wall Mount Bracket, Pan and Tilttable for LCD Monitors
	VMC-LCD/CMB-2	Ceiling Mount Bracket, Pan and Tilttable for LCD Monitors from 23"

Technical Drawing

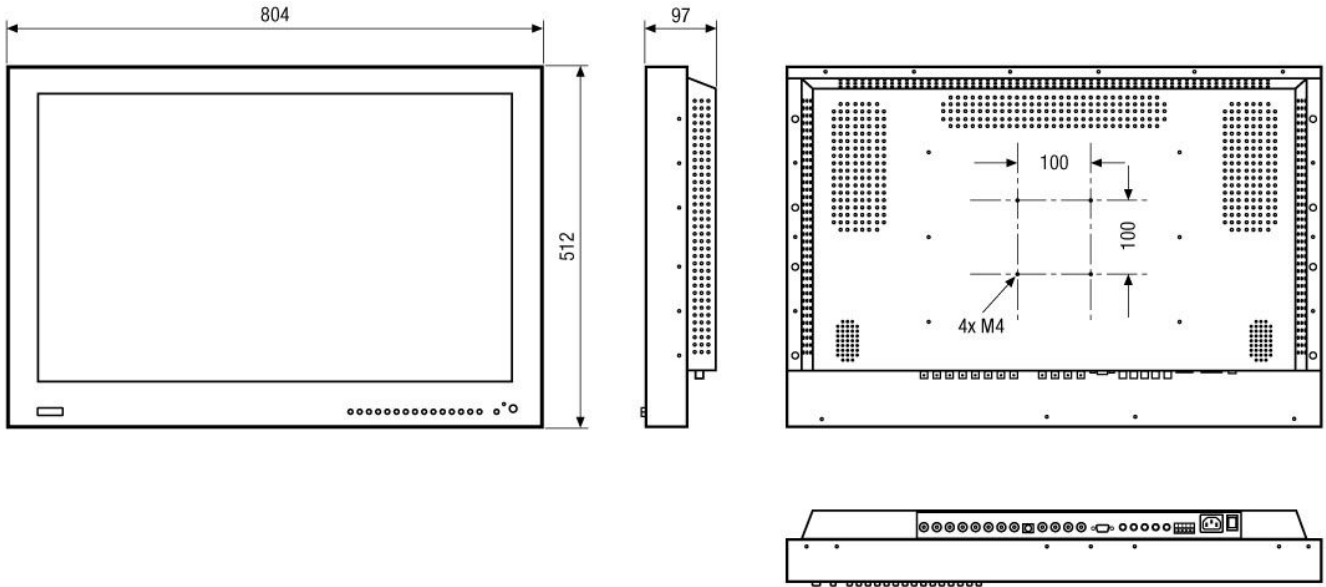

Maße/Dimensions: mm

Your partner for eneo products:

