Video Security

Housings | Mounts for Housings

WD-16/MK
Wall Mount with Swivel Head for VHB/VHM Weatherproof Housings, RAL7032

Art-No. 73064

eneo®

Features

For Wall Mounting	Rugged Aluminium Construction
For Weatherproof Housings (VHM Housings prefered)	Swivel head with Large Adjustment Range
Hidden Cable Harness	Ready for Installation

Specifications

Mounting distance from fixing point	300mm
Load capacity	8kg
Turning range of the swivel head	360°
Tilt range	Approx. 50°
Material	Aluminium
Colour	RAL7032
Dimensions (HxWxD)	See drawing
Weight	1.3kg

Accessories

73138 / PM-51	Pole Mount Kit for VDW-1, WD-15/16 Serie RAL7032

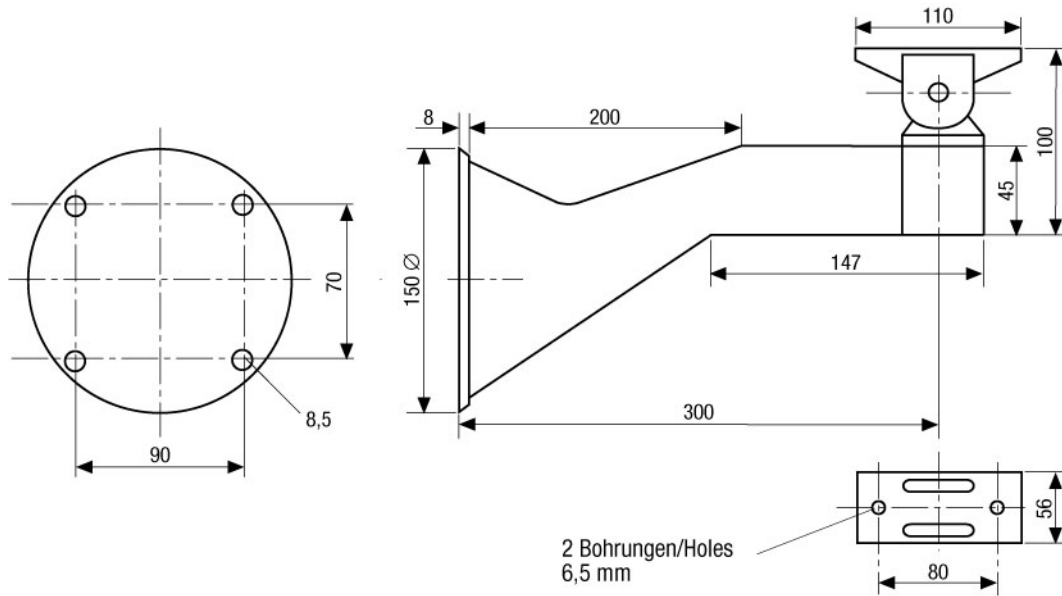## Accessories of

79374 / VHM/ECLA	Weatherproof Housing (330mm) with Heater, RAL7032, 230VAC
79397 / VHM/ECLB	Weatherproof Housing (330mm) with Heater, RAL7032, 24VAC
79366 / VHM/DP-ECL	Dustproof Housing (330mm), RAL7032
79404 / VHM/ECLKA	Weatherproof Housing (330mm) with Heater, Thermostat, CBD, RAL7032, 230VAC

WD-16/MK

(Accessories of continued)

79428 / VHM/ECLKB	Weatherproof Housing (330mm) with Heater, Thermostat/CBD, RAL7032, 24VAC
79405 / VHM/STLA	Weatherproof Housing (330mm) w. Heater Thermostat,Connection Brd,RAL7032,230VAC
79429 / VHM/STLB	Weatherproof Housing (330mm) w. Heater Thermostat, Connection Brd,RAL7032,24VAC
79416 / VHM/ECLA-210	Weatherproof Housing (210mm) with Heater, RAL7032, 230VAC
79483 / VHM/ECLB-210	Weatherproof Housing (210mm) with Heater, RAL7032, 24VAC
79555 / VHM/ECLKB-210	Weatherproof Housing (210mm) with Heater, Thermostat, CBD, RAL7032, 24VAC
79583 / VHM/DP-ECL210	Dustproof Housing (210mm), RAL7032
79543 / VHM/ECLKA-210	Weatherproof Housing (210mm) with Heater, Thermostat, CBD, RAL7032, 230VAC
79603 / VHM/STLB-210	Weatherproof Housing (210mm) w. Heater Thermostat,Connection Brd, RAL7032,24VAC
79607 / VHM/ZLA	Weatherproof Housing (330), Central Plug with 230V Heater, RAL7032
79608 / VHM/ZLB	Weatherproof Housing (330), Central Plug with 24V Heater, RAL7032
79619 / VHM/ZLKCB	Weatherproof Housing (330), 24V Heater, KV-1, Internal Pre-wiring, RAL7032

Product Information

When mounting the wall mount bracket, ensure that only dowels which are approved for this type of construction are used.

110

8   200

100

45

147

150 ⌀

70

300

8,5

90

2 Bohrungen/Holes
6,5 mm

56

80

Maße/Dimensions: mm

VIDEOR TECHNICAL E. Hartig GmbH
Carl-Zeiss-Straße 8 · 63322 Rödermark · Germany
Telefon +49 (0) 60 74/8 88-0 · Telefax +49 (0) 60 74/8 88-100
info@videortechnical.com · www.videortechnical.com

VIDEOR TECHNICAL