

Video Security



WD-5/MK

Wall Mount with Swivel Head for weatherproof Housing, black

Art-No. 79750



Features

For Wall Mounting
For Weatherproof Housings
Rugged Aluminium Construction

Swivel Head with Large Adjustment Range
Ready for Installation

Specifications

Mounting distance from fixing point	265mm
Load capacity	5kg
Turning range of the swivel head	360°
Tilt range	Approx. 90°
Material	Aluminium
Colour	Black
Dimensions (HxWxD)	See drawing
Weight	1kg

Accessories

79593 / PM-6D	Pole Mount Adapter for 2 Wall Mounts, (50-140mm Pole), RAL9002
79592 / PM-6S	Pole Mount Adapter for 1 Wall Mount, (50-140mm Pole), RAL9002
79613 / CMA-2	Corner Mount Adapter for Wall Brackets WD-5, WD-7, VTL-WW, VHK-WW, RAL9002



Accessories of

73888 / WF-I/LED80-230	LED Infrared Illuminator 880nm, Wide Flood, 100-240VAC, 80W, Twilight Switch
------------------------	--

(Accessories of continued)

73887 / MF-I/LED80-230LED Infrared Illuminator 880nm, Middle Flood,
100-240VAC/50-60Hz, 80W**73893 / WF-II/LED35-230**LED Infrared Illuminator 950nm, Wide Flood,
100-240VAC/, 35W, Twilight Switch**73892 / WF-I/LED40-230**LED Infrared Illuminator 880nm, Wide Flood,
100-240VAC, 40W, Twilight Switch**73889 / WF-II/LED70-230**LED Infrared Illuminator 950nm, Wide Flood,
100-240VAC, 70W, Twilight Switch**Product Information**

When mounting the wall mount bracket, ensure that only dowels which are approved for this type of construction are used.

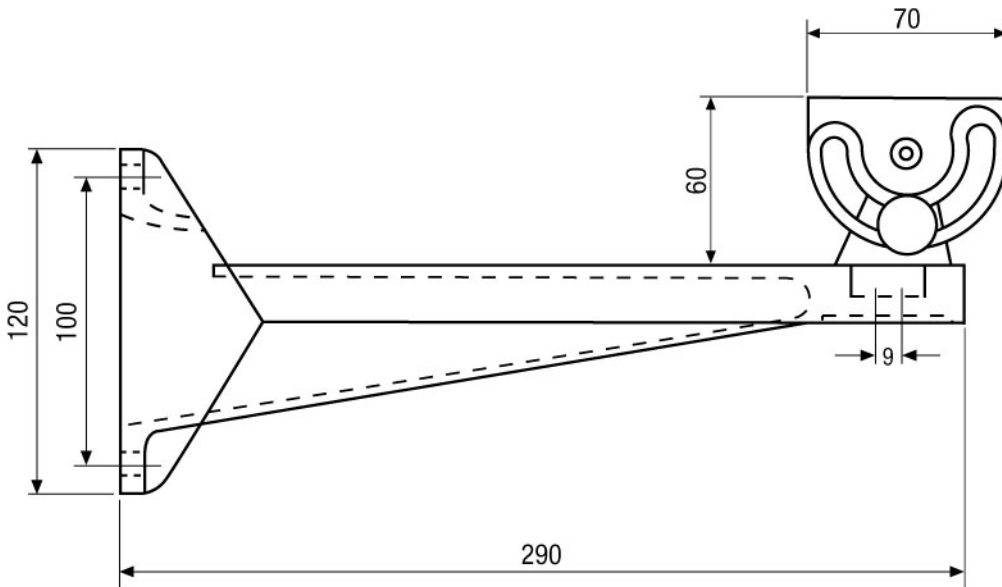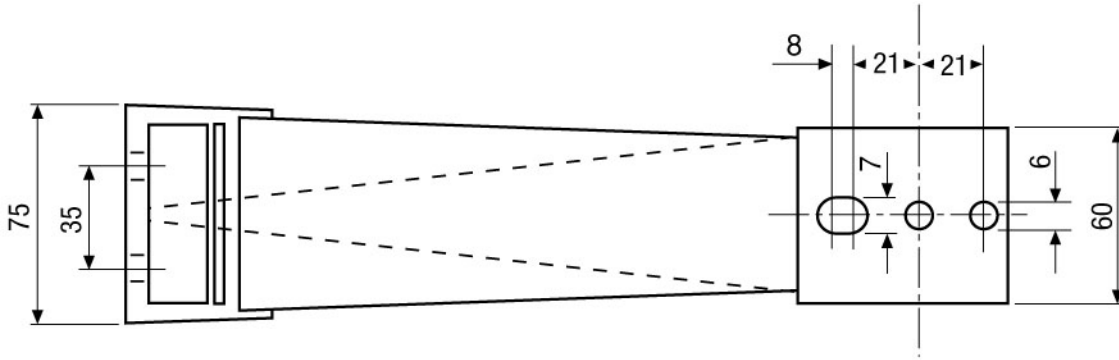

Maße/Dimensions: mm

VIDEOR TECHNICAL E. Hartig GmbH
 Carl-Zeiss-Straße 8 · 63322 Rödermark · Germany
 Telefon +49 (0) 60 74/8 88-0 · Telefax +49 (0) 60 74/8 88-100
 info@videortechnical.com · www.videortechnical.com

