



LED Infra-Red Illuminators

FDP-No.: 73826

WFL-II/LED-15W

- Power Rating: 15 W
- Spectral Emission: 950 nm
- Narrow-band Light Emission
- Protection Rating: IP 66
- Vibration-resistant
- Low Self-heating
- No Maintenance Required





Specifications:

Spectral Emission	950 nm
Spectral half-value range	80 nm
Scene Coverage*)	Approx. 15 m
Power consumption at nominal voltage	Approx. 15 W
Voltage supply	12 VDC +/- 0.5 V
Current consumption	Approx. 1.25 A
25% reduced light emission after:	>100,000 h
Temperature range	-30°C to +50°C
Heating above ambient air temperature	Max. 35°C
Protection rating	IP 66
Housing	Aluminium with plastic cover
Dimensions (HxWxD)	66x66x55 mm
Weight	350 g

Additional descriptions

*) On condition that a camera is used with good sensitivity in the infra-red range, a rel. lens aperture: min. 1.4 and a mean reflectance factor for spotlight objects.

Accessories	
EDP No. / Type	Description
73827 NE-109N 73433 DS-3	Twilight switch with adjustable switching points, ON/OFF switching delay, for wall mounting
71310 WD-8/MK	Wall bracket with swivel head 1/4", black finish
70023 WD-9N	Wall bracket with ball head 1/4", black finish

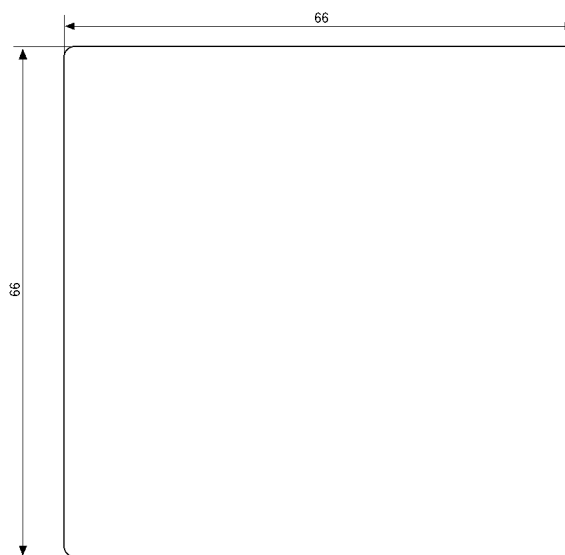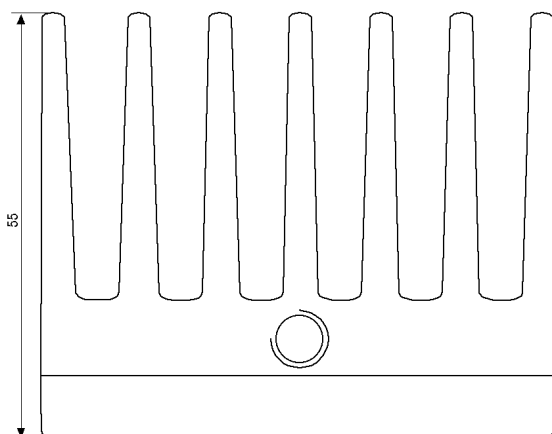

Befestigungsgewinde 1/4"
Fixing thread 1/4"

Maße/Dimensions: mm

e-mail: info@eneo-security.com • www.eneo-security.com