



Colour Cameras

520
TVC



▶ EHD 525 EX - 1/3" day / night rugged dome camera, high resolution


Specifications

Sensor: 1/3" SONY Exview™ CCD
 Picture element: 752 x 582 (PAL)
 Horizontal resolution: 520 TV lines
 Sensitivity: 0,5 lux / F = 1.2 colour (day mode)
 0,1 lux / F = 1.2 b/w (night mode)

Day/night control: automatic swiveling IR cut filter
 Video output: 1 Vp-p composite PAL
 S/N Ratio: over 48 dB
 Gamma correction: 0,45
 Synchronisation: internal / line-lock (only 24V AC)
 Line lock (24 V AC): on / off
 Back light compensation: on / off
 Auto white balance: yes
 AGC: on / off
 Electronic shutter: 1:50 ~ 1:100.000
 Tamper contact: micro switch
 Lens: DC varifocal lens, f=3,6 ~ 9 mm
 Heater: 12 W thermostat controlled
 Heater activating temperature: +10°C
 Casing: zink diecasted, dome polycarbonate, clear
 Weatherproof rating: IP 66

Power source: 12 V DC +/- 10%, 24 V AC +/- 10%
 Power consumption: 5 W max. (15 W with activated heater)

Ambient temperature: -40°C ~ +50°C
 Dimensions: 130 (W) x 130 (H) x 99 (D) mm
 Weight: 1,7 kg

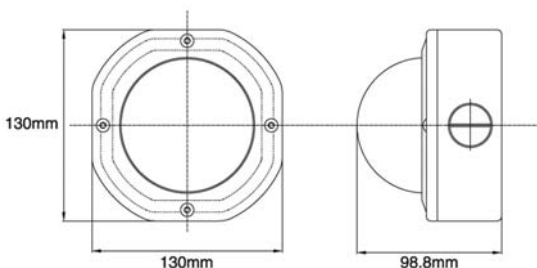

520
TVC



▶ EHD 350 HQ - 1/3" colour rugged dome camera, high resolution

Specifications

Sensor: 1/3" SONY CCD
 Picture element: 752 x 582 (PAL)
 Horizontal resolution: 520 TV lines
 Sensitivity: 0,5 lux / F = 1.2
 Video output: 1 Vp-p composite PAL
 S/N Ratio: over 48 dB
 Gamma correction: 0,45
 Synchronisation: internal / line-lock (only 24V AC)
 Line lock (24 V AC): on / off
 Back light compensation: on / off
 Auto white balance: yes
 AGC: on / off
 Electronic shutter: 1:50 ~ 1:100.000
 Tamper contact: micro switch
 Lens:
 EHD 350 HQ V1: DC varifocal lens, f=3,8 ~ 9,5 mm (IR-corrected)
 EHD 350 HQ V2: DC varifocal lens, f=9~22 mm

Heater: 12 W thermostat controlled
 Heater activating temperature: +10°C
 Casing: zink diecasted, dome polycarbonate, clear
 Weatherproof rating: IP 66

Power source: 12 V DC +/- 10%, 24 V AC +/- 10%
 Power consumption: 5 W max. (15 W with activated heater)

Ambient temperature: -40°C ~ +50°C
 Dimensions: 130 (W) x 130 (H) x 99 (D) mm
 Weight: 1,7 kg



▶ EHD 300 - 1/3" colour rugged dome camera

Specifications

Sensor: 1/3" SONY CCD
 Picture element: 752 x 582 (PAL)
 Horizontal resolution: 480 TV lines
 Sensitivity: 1,0 lux / F = 1.2
 Video output: 1 Vp-p composite PAL
 S/N Ratio: over 48 dB
 Gamma correction: 0,45
 Synchronisation: internal
 Back light compensation: on / off
 Auto white balance: yes
 AGC: on / off
 Electronic shutter: 1:50 ~ 1:100.000
 Tamper contact: micro switch
 Lens: DC varifocal lens, f=4 ~ 9 mm
 Alignment: 3-axis adjustment of camera module
 Casing: aluminium, dome polycarbonate, clear
 Weatherproof rating: IP 66

Power source: 12 V DC +/- 10%, 24 V AC +/- 10%
 Power consumption: 5 W max.

Ambient temperature: -10°C ~ +50°C
 Dimensions: 130 (W) x 130 (H) x 99 (D) mm
 Weight: 1,0 kg



▶ EHD WMA - wall mount bracket

Material: aluminium
 Dimensions: 150 (W) x 110 (H) x 170 (D) mm
 Weight: 600 g
 Max. load: 4 kg
 Application: with EHD camera series