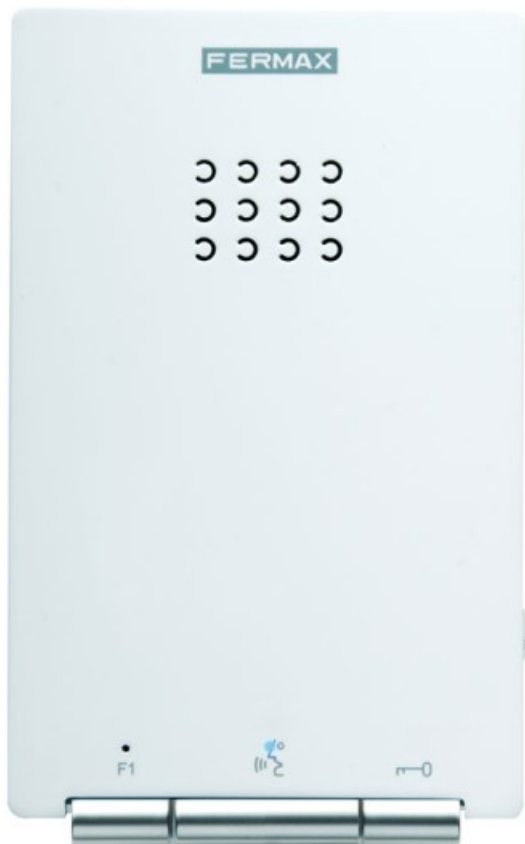


## iLOFT DUOX TELEPHONE

**Reference: 3430**

The iLOFT telephone is a compact and extra slim door entry system that works in hands-free communication with the outdoor panel. Configurable in Push-to-talk mode if needed for very noisy surroundings....

### DESCRIPTION

The iLOFT telephone is a compact and extra slim door entry system that works in hands-free communication with the outdoor panel. Configurable in Push-to-talk mode if needed for very noisy surroundings.

The integrated digital audio DUOX technology (2 non-polarised wires) ensures a high quality, hands-free communication without interferences. Sequential volume control with a sliding wheel.

Equipment manufactured in ABS plastic with ultraviolet protection and elegant matt finish for easy cleaning. Surface installation.

**BUTTONS**

Button to activate/deactivate the communication with the door entry panel.

Door opener button and call to guard (if any, press when in standby).

Button to activate additional functions: stair light switching, 2nd door opening, panic call, etc.

### TECHNICAL SPECIFICATIONS

**ACCESSORIES****-DESKTOP**

Fermax desktop support allows a call from the entrance panel to be answered from the office desktop. Recommended for offices, businesses and professionals who work from home.

5636 ILOFT TELEPHONE DESKTOP SUPPORT

**-REPLACEMENT**

3388 UNIVERSAL FRAME 120X240

3389 UNIVERSAL LARGE FRAME 210X240

**GENERAL CHARACTERISTICS**



Technology: DUOX (non-polarized 2 wire full digital system)

Audio/Video system: Audio

Set-up (Installation): Surface mounted

Handset with magnet to facilitate the hang up: No

Hands-free communication: Yes

Press-to-talk communication configurable: Yes

Induction loop included: No

Color of the product: Matt white

Number of pushbuttons: 3

Kind of pushbuttons: Mechanical

Number of leds for lighted indications: 3 (red, blue and green)

#### **PROGRAMMING OF THE TERMINAL ADDRESS**

From the terminal: No

From the outdoor panel or guard unit: Yes

From the outdoor panel throughout the apartment door bell: Yes

#### **FEATURES**

Guard unit call: Yes (by means of the door release button when in standby)

Auto-on: Yes (only with panel n° 0 of its own block)

Additional function F1: Yes (Button F1 sends a negative and/or command)

Additional function F2: No

Apartment door bell differentiated from the outdoor panel: Yes

Connection for additional devices (call extension, light/buzzer activator, etc.): Yes (ref. 2040, ref. 2438. Ref. 3457)

Doormatic (automatic door release for offices, etc.): Yes (Green led indication)

#### **ADJUSTMENTS**

Ring tones selection: Yes (5)

Call volume control: Yes (by sliding wheel)

Do-not-disturb mode: Yes (by sliding wheel) + red led indication

Audio volume control: Yes (by sliding wheel)

#### **TECHNICAL FEATURES**

Product dimensions (width x height x depth) mm: 90 x 146,5 x 20

Time to answer or open the door since the call is done: 30 s.

Conversation time: 90 s.

Conversation privacy: Yes

Voltage: 18 Vdc

Maximum consumption (mA): 210

Standby consumption (mA): 18

Working temperature (°C): [-5°C, +40°C]

Humidity: [0%, 90%]

Product Weight (kg): 0,16

Line adaptor included in the terminal: Yes (A, C, default position OFF)

Connections: Bin, Bin, Bout, Bout, -, A+, F1, T

**Weight:** 0,1693 kg

**Size of product when packed:** 15x9,5x3,3 cm

**EAN 13:** 8,4243E+12