



M4200 Series

# FLIR MPX™

## Megapixel Over Coax DVR

FLIR's M4200 Series DVRs use the latest HD-CVI technology, giving you the flexibility to upgrade your security systems to HD resolution using existing coax cabling. With support for both 1080p/720p HD resolution MPX cameras plus standard analog cameras, the DVR is ideal for retrofit applications. MPX also facilitates advanced features previously unavailable over a coax cable including duplex transmission for PTZ control, audio transmission, and extended distance cable runs up to 2300 ft.

### HIGH DEFINITION QUALITY

*Experience outstanding Megapixel resolution*

- 1080p (1920x1080), 720p (1280x720), 960H (960x480) resolution @ real time (30/25fps)
- MPX format is compatible with HD-CVI and analog

### EASY INSTALLATION

*Ideal for retrofit – upgrade to HD over existing coax*

- Standard BNC connection – no networking complexities
- Supports both HD and SD analog simultaneously

### SUPERIOR PERFORMANCE

*Zero latency and extended cable runs*

- Smooth real-time viewing with zero video latency
- Extended cable runs of up to 2300ft (700m)
- Two-way communication over coax allows for easy connection and control of PTZ cameras (PTZ cameras sold separately)

### FLIR CLOUD – QUICK & SECURE REMOTE VIEWING


*Remote access via iOS, Android, PC / Mac with FLIR Cloud*

- Set up remote viewing in three easy steps: install FLIR Cloud app, scan QR code on DVR, view live video
- Multisite viewing on FLIR Cloud CMS for PC / Mac
- Cloud platform will offer premium services to receive Video Surveillance as a Service (VSaaS)



## Specifications

DVR Specifications System	M4200 Series
Operating System	Linux (embedded)
Pentaplex	Simultaneous view, record, playback, backup & remote monitoring
Number of Channels	4/8 channel — MPX or analog cameras supported
<b>Inputs/Outputs</b>	
Video IN	4/8 x 1Vp-p, CVBS, 75ohms, BNC
Video OUT	No
VGA OUT	Yes
HDMI	Yes
Audio IN	4 channel, RCA
Audio OUT	1 channel, RCA
USB Port	USB 2.0 x 2 (1 at the back, 1 at the front)
Alarm IN	4 ch: 4 Alarm IN, 8 ch: 8 Alarm IN
Alarm OUT	3 Alarm OUT
Video Output Resolution	1920x1080 (HDMI), 1280x1024, 1024x768
PTZ Control	Via Coax and RS485, supports Pelco D and P
<b>Display</b>	
Live Display	4 ch: 1, 4 8 ch: 1, 4, 8
Live Display Speed	4 ch: 120 NTSC, 100 PAL 8 ch: 240 NTSC, 200 PAL
OSD	Camera title, time, video loss, camera lock, motion detection, recording
System Navigation	USB mouse, IR remote controller, front panel
Motion Area Setting	Adjustable grid (22x18)
Sensitivity	100
Firmware Upgrade	Automatic over the Internet & via USB device and network
User Authority	By user group
Time Synchronization	Auto time sync by NTP server
<b>Recording</b>	
Video Compression	H.264
Audio Compression	G.711
Recording Resolution*	NTSC: 1920x1080 (1080p), 1280x720 (720p), 960x480 (960H), 704x480 (D1), CIF (352x240) PAL: 1920x1080 (1080p), 1280x720 (720p), 960x576 (960H), 704x576 (D1), CIF (352x288)
Recording Frame Rate (FPS)	NTSC: 4 ch: 120 @ 1080p / 720p, 8 ch: 240 @ 1080p / 720p PAL: 4 ch: 100 @ 1080p / 720p, 8 ch: 200 @ 1080p / 720p
Recording Resolution Setting	Per camera for different resolutions
Recording Quality Control	6 levels
Recording Schedule	By hour, by day, by recording mode, by motion, by channel
Pre Recording	Max. 30 Seconds
Post Recording	Max. 5 Minutes
Reliability	Watch-Dog, auto-recovery after power failure
Covert Video	Yes
<b>Playback</b>	
Playback	Single channel or quad playback
Playback Speed	Variable Max 4x
Playback Players	Backup Player
Search	By time & event
Log Search	Up to 1,000 lines for motion detected, configuration changes, connects/disconnects and video loss
Audio Play	Yes
<b>Storage &amp; Archive</b>	
Storage	Up to 2 HDD's (SATA)
Maximum Capacity	Up to 2x4TB
Backup Media	USB flash drive, HDD & network
Backup File Format	DAV or ASF file

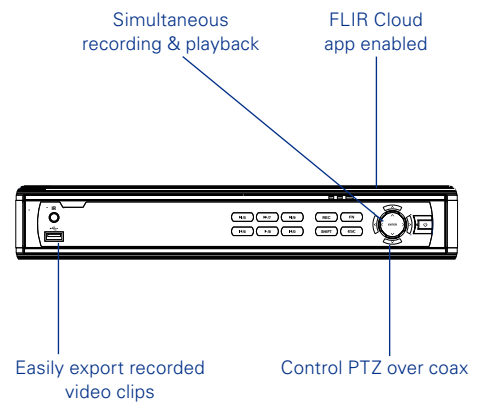

\* 1080p MPX cameras are required to take advantage of 1080p recording.

## Specifications

DVR Specifications Cont.		M4200 Series	
<b>Connectivity</b>			
Cloud Connection	FLIR Cloud™		
Supported Operating Systems	Windows™, Mac OSX		
Remote Software	Client Software (PC/Mac)		
Email Notification	Text with snapshot		
Instant Smart Phone & Tablet Support	FLIR Cloud™ iPad®, iPhone®, Android™ apps		
DDNS Free	FLIR DDNS		
System Configuration	Full setup configuration over network		
Ports	Programmable by User		
Network Protocol	HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPoE, DDNS, FTP, IP Filter		
Network Interface	10/100/1000-Base-TX, RJ-45		
Network Speed Control	200MB total, 48Kb ~ 4096Kb/sec. per camera		
<b>DVR General Information</b>			
Power Consumption	Approx. 15 watts (No HDD Installed)		
Supply Voltage	4/8 ch: 100VAC-240VAC, 12VDC, 2A, 50/60Hz		
Unit Dimensions (W x D x H)	14.7" x 11.2" x 2.2" / 375mm x 285mm x 55mm		
Unit Weight	5.2lbs / 2.4KG (without HDD)		
Operating Temperature	32° ~ 104° F / 0° ~ 40° C		
Humidity	10 ~ 90% RH		

### Ordering Information

#### NTSC models

M42040: 8-41430-01015-9 (4ch, no HDD)  
 M42041: 8-41430-01016-6 (4ch, 1TB HDD)  
 M42042: 8-41430-01017-3 (4ch, 2TB HDD)  
 M42044: 8-41430-01025-8 (4ch, 4TB HDD)  
 M42046: 8-41430-01229-0 (4ch, 6TB HDD)  
 M42048: 8-41430-01230-6 (4ch, 8TB HDD)  
 M42080: 8-41430-01018-0 (8ch, no HDD)  
 M42081: 8-41430-01019-7 (8ch, 1TB HDD)  
 M42082: 8-41430-01020-3 (8ch, 2TB HDD)  
 M42084: 8-41430-01026-5 (8ch, 4TB HDD)  
 M42086: 8-41430-01231-3 (8ch, 6TB HDD)  
 M42088: 8-41430-01232-0 (8ch, 8TB HDD)

#### PAL models

M42040P: 8-41430-01181-1 (4ch, no HDD)  
 M42042P: 8-41430-01182-8 (4ch, 2TB HDD)  
 M42043P: 8-41430-01183-5 (4ch, 3TB HDD)  
 M42044P: 8-41430-01184-2 (4ch, 4TB HDD)  
 M42046P: 8-41430-01185-9 (4ch, 6TB HDD)  
 M42048P: 8-41430-01186-6 (4ch, 8TB HDD)  
 M42080P: 8-41430-01187-3 (8ch, no HDD)  
 M42082P: 8-41430-01188-0 (8ch, 2TB HDD)  
 M42083P: 8-41430-01189-7 (8ch, 3TB HDD)  
 M42084P: 8-41430-01190-3 (8ch, 4TB HDD)  
 M42086P: 8-41430-01191-0 (8ch, 6TB HDD)  
 M42088P: 8-41430-01192-7 (8ch, 8TB HDD)

### Package Dimensions

17.3 x 6.1 x 14.2" / 440 x 155 x 360mm

#### MARKHAM, ONTARIO

FLIR Systems, Inc.  
 250 Royal Crest Court  
 Markham, ON L3R 3S1  
 Canada  
 PH: +1 866.344.4674

#### PORTLAND

Corporate Headquarters  
 FLIR Systems, Inc.  
 27700 SW Parkway Ave.  
 Wilsonville, OR 97070  
 USA  
 PH: +1 866.477.3687

[www.flir.com/security](http://www.flir.com/security)  
 NASDAQ: FLIR

Equipment described herein may require US Government authorization for export purposes. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2015 FLIR Systems, Inc. All rights reserved. [Created 03/18/2015]