


Z10

Tension Sensor

The Z10 Tension Sensor measures the mechanical disturbance of a tensioned fence wire to raise an alarm when a wire is deflected during an attack.

It continuously measures and reports wire tension in real time, to identify when maintenance is required or the fence has been damaged.

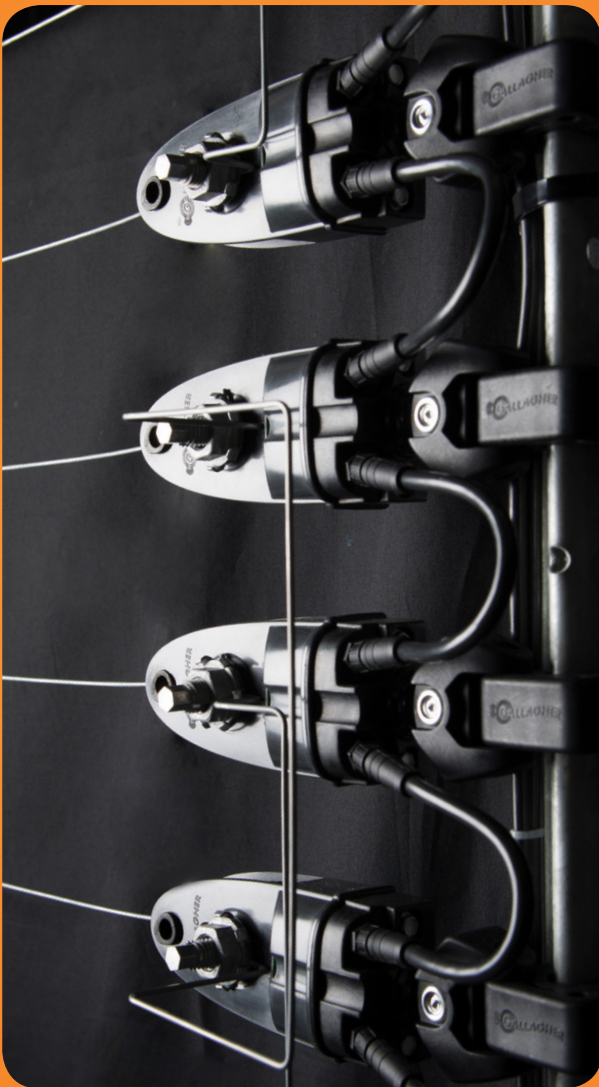

Features and benefits:

- Continuous, real-time, wire tension measurement displayed in kg or lb
- Able to detect both fast and slow attacks
- Attack alarm based on single or multi sensors
- Differentiation between environmental changes and attacks
- Self aligning to optimize performance and to allow for variation in mounting angle
- 7kg to 60kg continuous operating tension range (15 to 130 lb)
- Overload protection to 200kg (440lb)
- High, and low, wire-tension maintenance alarms
- Fast installation using new Pivoting Mount Technology as well as plugged and IDC connectors
- Options to retro-fit to existing Gallagher perimeter security systems
- Fence and wiring design utility for accurate fence design
- HBUS communication protocol, compatibility with high security AES 128bit encryption and latest Gallagher technologies
- Fully integrated with Gallagher Command Centre v7.10 and later

Technical Specifications

GALLAGHER Z10 TENSION SENSOR

Sensor	Voltage	18-36V DC (Supplied via Z40 voltage booster)
	Power Consumption	82mA (standby) / 115mA (peak)
Z40 Voltage Booster	Voltage - Input	13.6V DC
	Voltage - Output	36V DC
Communication	Between Z10 and Gallagher Controller 6000	HBUS RS485 at up to 1Mbps per second
	Wiring Format - Data	2 wires using Cat5e (2 wire + ground)
	Wiring Format - Power	4 wires (2x2) using Cat5e (or as per design utility)
	Encryption Level	HBUS 128 Bit AES
Cable Specification	Z11 cable adapter to Gallagher Controller 6000	Cat5e outdoor rated cable (G10600)
Device Limits	Maximum number of Z10 Tension Sensors per Gallagher Controller 6000	80*
	Maximum distance between Gallagher Controller 6000 and Z10 Tension Sensor	500m* (546 yards)
	<i>* Use Gallagher design utilities to determine sensor layout design</i>	
	Minimum Operating Tension	7kg (15.4lb)
	Maximum Operating Tension	60kg (132.2 lb)
	Safe Maximum Instantaneous Tension	200kg (440.9 lb) (STP)
	Humidity	100% non-condensing
Temperature Range	-40°C to 60°C (-40°F to 158°F)	
Environmental Protection Rating	IP68	
Impact Rating	IK07 (STP)	
Mounting Range	Vertical range 91mm pitch	±45° from horizontal
	Vertical range 60mm pitch	±14° from horizontal
	Horizontal range	+68° from straight fence (internal corners) -12° from straight fence (external corners)
Dimensions (Including attached bracket but excluding Z11 cable)	Height x Width x Depth	56 x 176 x 50mm (2.2 x 6.9 x 1.9 inches)

PART NUMBERS

Z10 Tension Sensor	G13110
Z11 Cable	G13122 (and 13132)
Z12 Cable adapter	G13125
Z11 End of line	G13126
Z40 Voltage booster	G13310
<i>Compatible with:</i>	
2.0mm HT steel wire	G29802
2.5MM HT steel wire	G29803

This product is approved by the Australian Government Security Construction & Equipment Committee (SCEC). Contact your local Gallagher representative for information.

GALLAGHER WORLD HEADQUARTERS

Kahikatea Drive, Hamilton 3206
Private Bag 3026, Hamilton 3240
New Zealand

TEL: +64 7 838 9800

EMAIL: security@gallagher.com

REGIONAL OFFICES

New Zealand..... +64 7 838 9800
Americas..... +1 877 560 6308
Asia +852 3468 5175
Australia +61 3 9308 7722
India +91 80 2676 2084
Middle East..... +971 4 2602145
South Africa +27 11 974 4740
United Kingdom / Europe..... +44 2476 64 1234

DISCLAIMER: This document gives certain information about products and/or services provided by Gallagher Group Limited or its related companies (referred to as "Gallagher Group"). The information is indicative only and is subject to change without notice meaning it may be out of date at any given time. Although every commercially reasonable effort has been taken to ensure the quality and accuracy of the information, Gallagher Group makes no representation as to its accuracy or completeness and it should not be relied on as such. To the extent permitted by law, all express or implied, or other representations or warranties in relation to the information are expressly excluded. Neither Gallagher Group nor any of its directors, employees or other representatives shall be responsible for any loss that you may incur, either directly or indirectly, arising from any use or decisions based on the information provided. Except where stated otherwise, the information is subject to copyright owned by Gallagher Group and you may not sell it without permission. Gallagher Group is the owner of all trademarks reproduced in this information. All trademarks which are not the property of Gallagher Group, are acknowledged. Copyright © Gallagher Group Ltd 2015. All rights reserved.

