

C-VIEW

Fully Functional High Speed Domes



- Day/night
- High resolution (520 TVL)
- Vandal-resistant
- 30x optical zoom
- 32 presets, tour, privacy zone
- RS485 UTP and coax telemetry control
- 360° continuous rotation
- Remote reset and configuration
- Flexible mounting options

Perfect Partners



KBD2
Page 60



IR Lamp
Page 48

The Ganz C-View PTZ dome cameras are sister products to the C-AllView ruggedised units. C-View cameras are vandal-resistant day/night domes and constructed from vandal-resistant die-cast aluminium powder coated to protect them from scratching, oxidation or attacks from solvents and sealed to IP67. They are designed for installation in harsh and challenging environments.




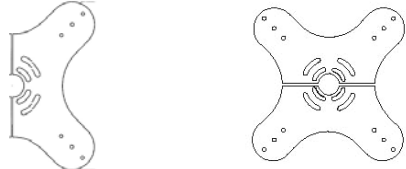

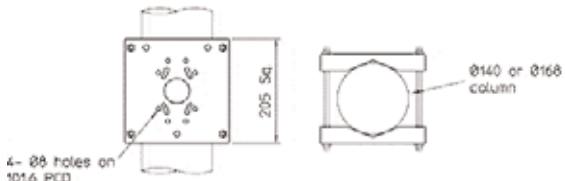
The fully featured C-View includes high resolution (520TVL) camera module and is fitted as standard with a powerful 30x optical zoom. 32 presets are available and also 16 preset tours (8 slow and 8 fast) and 4 mimic tours. Additional features include 15 user definable privacy zones, and an extensive range of built-in protocols to ensure they are compatible with other manufacturers' telemetry systems. Remote dome reset and configuration is also possible, with upload/download of camera settings.

Model	C-DN2F30P	C-DN2X30P
TV System	PAL	PAL
Zoom Ratio	30x optical 12x digital 3.5-105mm	30x optical 12x digital 3.5-105mm
Min Illumination (50%ire)	0.8lux colour 0.04 mono	0.8lux colour 0.04 mono
Resolution	520TVL	520TVL
Protocols	16 inc Ganz CBC C-Dome Pelco P & D Ikegami Honeywell Baxal DC	16 inc Ganz CBC C-Dome Pelco P & D Ikegami Honeywell Baxal DC
Power Supply	Included 230V AC in	Included 230V AC in
Weight	5.8kg	5.8kg
IP Rating	Internal only	IP67

Ordering Codes:

- C-DN2F30P Internal C-View 30x Optical Zoom High Speed Day/Night Dome Camera c/w PSU
 C-DN2X30P-W External C-View 30x Optical Zoom High Speed Day/Night Dome Camera c/w PSU Cream Colour
 C-DN2X30P-B External C-View 30x Optical Zoom High Speed Day/Night Dome Camera c/w PSU Black Colour

The brackets detailed below are suitable for both the C-AllView and the C-View range of cameras.

	<p>Pendant mount</p> <p>Pendant Pole mount Bracket for suspending from the top down c/w Lanyard clip (various lengths available on request).</p>	<p>Lenses</p>
	<p>Swan mount</p> <p>Swan neck bracket ideal for more decorative mounting options for wall pole mounting c/w Lanyard clip.</p>	<p>Cameras</p>
	<p>Wall mount</p> <p>Wall mounting options for fixing directly to upright locations, c/w Lanyard clip.</p>	<p>Hardware</p>
	<p>IR mounting</p> <p>These brackets are 180 or 360° circular sandwich plates that fit between the top of a pole and the dome camera. For fitting of IR lamps.</p>	<p>Control Room</p>
	<p>Corner mount</p> <p>The corner mount unit for connecting the wall bracket when corner mounted.</p>	<p>IP Media & Transmission</p>
	<p>Pole clamp</p> <p>The pole clamp unit for connecting the wall bracket when pole mounted.</p>	<p>Radar Detection</p>
	<p>Extension cable</p> <p>20m extension cable for extending umbilical cable supplied with C-AllView.</p>	<p>ANPR</p>

Ordering Codes:

- C-PPM-W Pendant Pole Mount bracket, White
- C-PM-W Swan Neck Bracket, White
- C-WM-W Wall Mount Bracket, White
- PB180 IR Mount Bracket 180°
- C-A20P 20 m Extension Cable for C-AllView Pre-plugged
- C-CMB-W Corner mount bracket, white

- C-PPM-B Pendant Pole Mount Bracket, Black
- C-PM-B Swan Neck Bracket, Black
- C-CWM-B Wall Mount Bracket, Black
- PB360 IR Mount Bracket 360°
- UPCA 1 Universal Pole Clamp Adaptor
- C-CMB-B Corner mount bracket, black