





**DISCREET CAMERA**

**COLOUR**

**CW-600VR/A**

● **Colour Vandal-Resistant Ceiling/Wall Camera with Audio**

A unique miniature, slim steel housing designed for ceiling or wall installation. The unit conceals a miniature colour camera module on adjustable 'swivel and tilt' cradle.

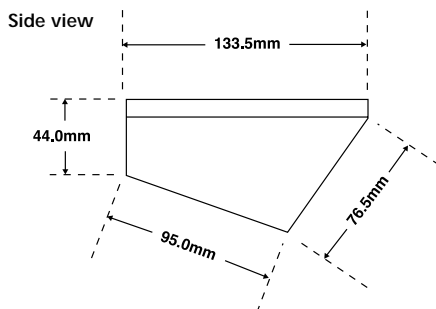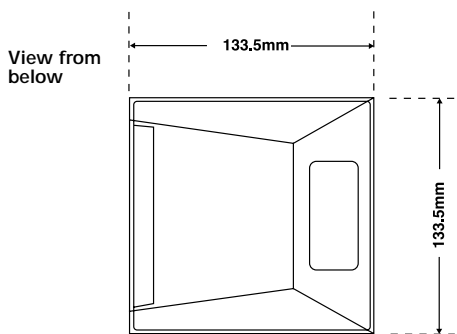

- 1/3" CCD
- 330 TV lines
- 5 lux sensitivity
- Supply voltage: 8-15 Vdc
- Audio output: 1V p-p

**Model options**

Lens	Model number
4.0mm	CW-600VR/A
2.5mm	CW-600VR/A/2.5
6.0mm	CW-600VR/A/6.0
8.0mm	CW-6300VR/A/8.0
12.0mm	CW-600VR/A/12.0
Dummy	CW-600VR/D

- Standard resolution colour camera module.
- Designed to look good, take knocks and be easy to install.
- Resistant to destruction and removal.
- White, powder-coated, 1.2mm high quality mild steel case with a 4mm toughened polycarbonate viewing window.
- Optional knock-out for use with 20mm diameter steel trunking.
- Wall or ceiling mountable.

See Also:



CU-605VR/PA  
Colour ceiling unit



CC-600VR/A  
Colour cornice camera



CM-600VR/A  
Colour corner mount camera

SPECIFICATION

VIDEO	
Image sensor	1/3" CCD sensor, 512 (H) x 492 (V) pixels
Horizontal resolution	330 TV lines or greater
Lens options	See table above
Electronic shutter	Automatic 1/60 to 1/16,000, 256 steps
Sensitivity	5 lux
Video output	625 line, 50 frame CCIR, 1Vp-p, 75 Ohms
Supply voltage / Power	8-15 Vdc / 110mA
Working temperature	0°C to 50°C

AUDIO	
Microphone	Omni-directional electret
Audio output	1Vp-p, 600 Ohms
Audio bandwidth	100Hz - 10KHz, +/- 3dB

This data sheet is also available on disk.