




**COVERT CAMERA**

**COLOUR**

**DM-610**

● Mini-dome colour camera

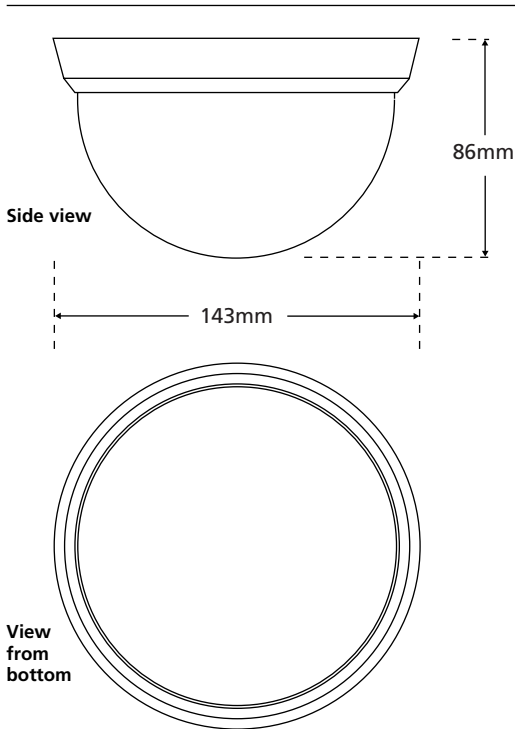


- 1/4" CCD
- 350 TV lines
- 5.0 lux sensitivity
- Supply voltage: 12 Vdc
- Audio output: 1V p-p

**Lens option**


Lens	Product Code
4.0mm	DM-610/A

- Camera mounted on manually adjustable miniature 'swivel and tilt' cradle, for exact camera positioning
- Comes with black base plate and smoked dome. Also available with white base plate and clear dome
- Comes with free power supply
- Comes with free audio capability
- Comes with lint-free cleaning cloth to remove grease and dirt from case and lens


**See Also:**



**DM-310/A**  
Colour option



**DM-600**  
Vandal-resistant colour dome camera



**DM-604**  
Vandal-resistant multi-directional 4 camera dome

**SPECIFICATION**

<b>VIDEO</b>	Image sensor	MOD-607 camera module
	Horizontal resolution	1/4" CCD sensor, 500 (H) x 582 (V) pixels
	Lens options	350 TV lines or greater
	Electronic shutter	SEE TABLE
	Sensitivity	Automatic linear shutter
	Video output	5.0 lux
	Supply voltage	PAL, 1Vp-p, 75 Ohms
Working temperature	12 Vdc ± 10%	
		-5°C to +40°C

<b>AUDIO</b>	Microphone	Omni-directional electret
	Audio output	1Vp-p, 600 Ohms
	Audio bandwidth	100Hz - 10KHz, +/- 3dB

Specification and availability of products are subject to change without notice