




CLM-154 DVR Combo
15" TFT LCD Monitor
With Built-In
4-Channel MPEG4 DVR



System Configuration

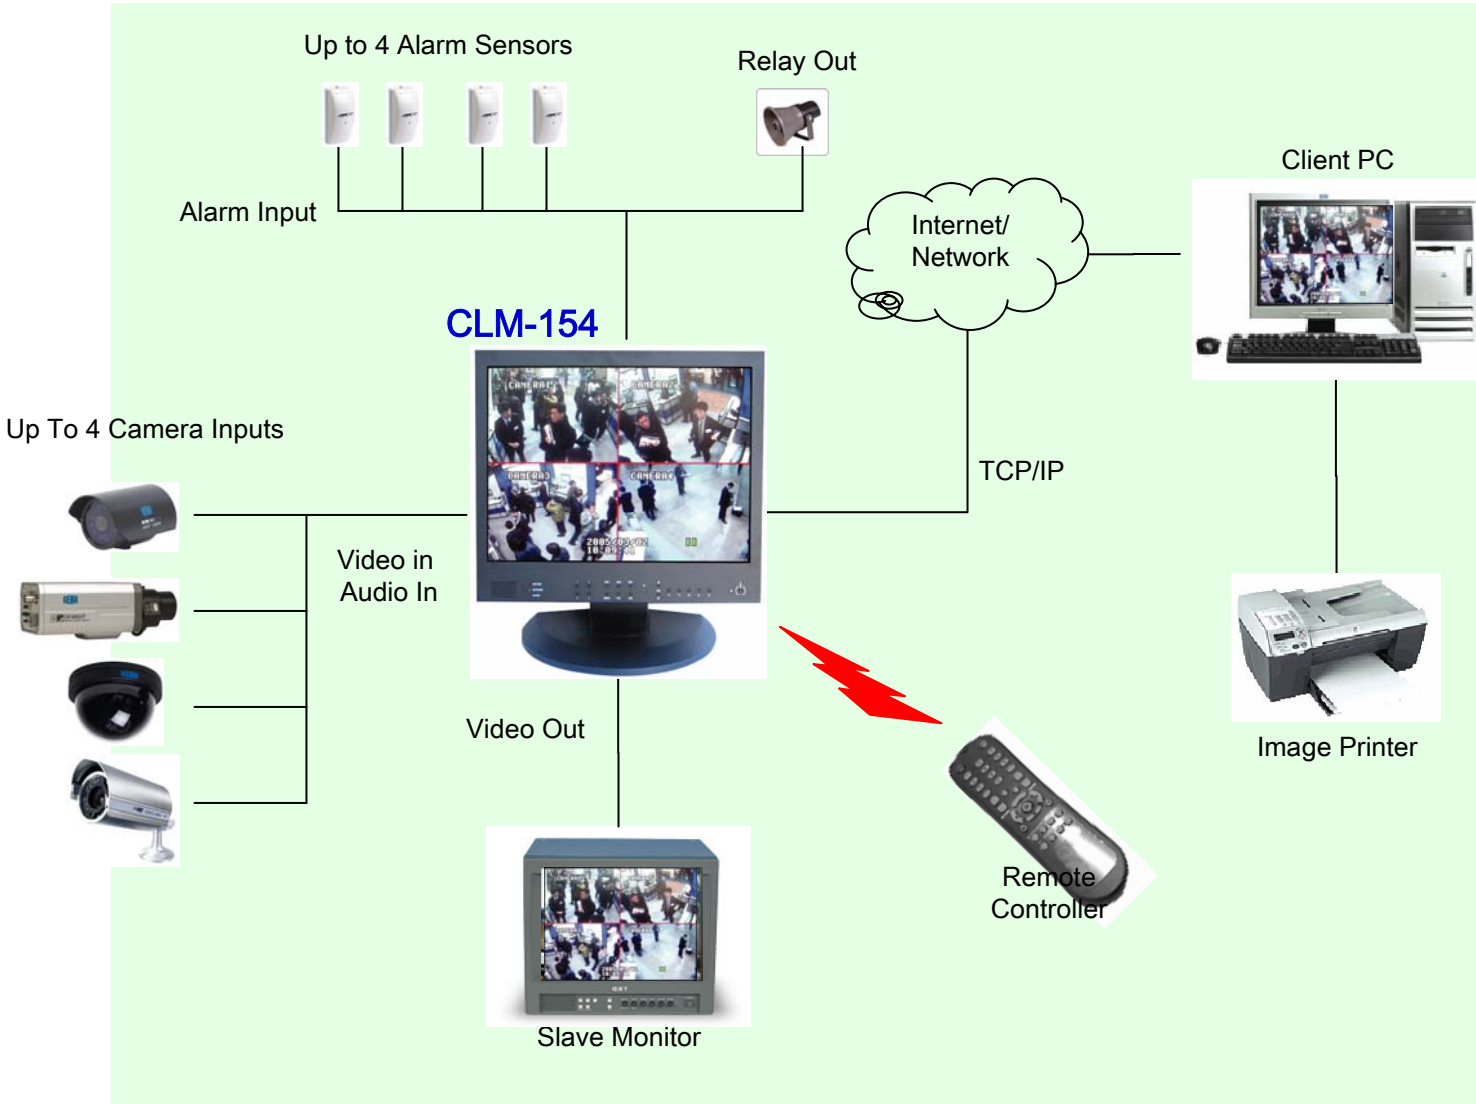

CLM-154




► Features

- ❖ 15" TFT-LCD
- ❖ 4-Channel TRIPLEX DVR
- ❖ MPEG4
- ❖ Ethernet 10/100BaseT
- ❖ DHCP, DDNS, web support
- ❖ PTZ Control
- ❖ RJ45 or BNC Camera Input
- ❖ NTSC and PAL Compatible
- ❖ Wireless Remote Controller
- ❖ Internal 250Gb HDD
- ❖ Easy Search(1×~64×)

► Specifications

LCD PANEL	Resolution	1,024 x 768
	Luminance [cd/m ²]	450
	Contrast Ratio	600:1
	Viewing Angle	100(V)/130(H) (CR>10)
	Response Time [ms]	16
HDD		250Gb, Server Rated HDD
Video Input		Composite Video RJ45 x 4 or BNC x 4 (PAL)
Video Output		Composite Video (BNC x 1)
Audio Input/Speaker		4 x Inputs Mono 1W
Alarm / Relay		4 x Inputs 1 x Output
P/T/Z Control & Port		RS-485
LAN		10/100BASE- T Ethernet NIC
Screen Modes		1 or 4 Channel Mode, Auto Switching
Recording Speed (PAL)	352×240	100 fps
	704×240	50 fps
	704×480	25 fps
Recording Resolution		PAL : 352×288, 704×288, 704×576
Compression Method		MPEG4 (Modified)
Byte Size per image		3~5Kbyte @PAL : 352×288 5~10Kbyte @PAL : 704×288 6~16Kbyte @PAL : 704×576
Storage Temp and Humidity		-20~65°C / 20~80%RH
Operating Temp and Humidity		5~40°C / 20~80%RH
Power		DC12V, 5A (Adaptor)
Dimension		350(w) × 315(H) × 65(D)mm (Stand not included)
Weight		8.5kg

CLM-154 Packing List

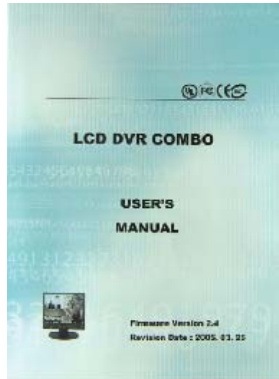

User Manual



Remote Controller



AAA Battery(x2)



Adaptor




Power Cord



CD



RJ45 to BNC & RCA(x4)

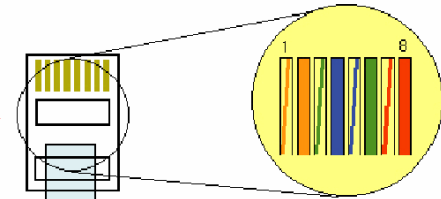

Flat

- 1 : NA
- 2 : NA
- 3 : +12
- 4 : Audio from Cam
- 5 : GND
- 6 : GND
- 7 : Video
- 8 : NA