

M800/M600 Series

DAS Storage & Network Video Recorder

 $\overline{GVD}\ M600$ is a powerful video surveillance system that scales easily to suit the needs of enterprise solution. It is a top-of-line GVD NVRs with redundant components to provide high availability. This rack-mountable recorder can scale to more than 100 TB video storage. It is the best solution for mission critical applications such as government complex, city surveillance, casino, transportation, and homeland security projects.

- Enterprise class server chassis
- High performance RAID level recorder
- Supports up to 48 megapixel cameras (64 D1 Cameras)


Key Feature

- Pre-built with 32, 48 and 64 channels licenses, best for large scale D1, 1.3M to 10M camera installations
- Supports large data throughput for multiple megapixel cameras triplex video functions
- Provides the unique Time Sector Engine (TSE) for best video read-write performance on hard disk drives (HDDs)
- Server class rack-mountable chassis
- Supports highly scalable and redundant solutions by using the GVD M800 Backup Server and M900 Failover Server
- Supports powerful GVD CMS workstation E100 for complete remote management on a large NVR network
- Redundant power supply and hot swappable HDD with RAID support
- Operates with GVD HD NVR Client to meet the needs of simple remote monitoring
- New generation of storage expansion built on top of the robust industry server class IPC for the long-hour and tough operation environment

Storage Capability

| Model | Channel | Compression | Resolution | FPS | 7 | 10 | 15 | 30 |
|-------|---------|---------------|------------|-----|----|----|----|----|
| M620 | 24 | MPEG4 | D1 | Day | 66 | 50 | 35 | 19 |
| | 24 | H.264 | 1.3M | | 25 | 19 | 13 | 7 |
| | 32 | H.264 | 3.0M | | 9 | 7 | 5 | |
| | 16+16 | MPEG4 / H.264 | D1 / 1.3 M | | 27 | 21 | 15 | 8 |
| | 32 | H.264 | 1.3M | Day | 38 | 28 | 21 | 11 |
| M640 | 64 | MPEG4 | D1 | | 50 | 37 | 26 | 14 |
| M830 | 64 | H.264 | 1.3M | | 19 | 14 | 10 | 5 |
| | 32+32 | MPEG4 / H.264 | D1 / 3.0M | | 16 | 12 | 8 | |

System Diagram

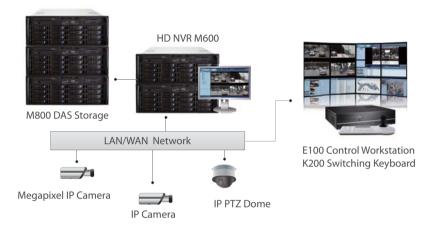

Camera Support List





Brickcom



CIVB

















CSP













SANYO
























www.gvdigital.com



Vertical Market


Government complex, city surveillance, casino, transportation, and homeland security projects.

Front Panel Layout

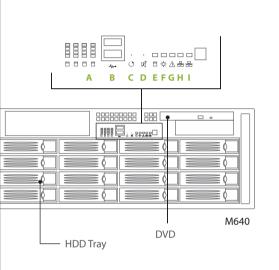

- A HDD Tray Activity LED
- **B** USB 2.0 Port
- System Reset Button
- Alarm Mute Button
- System HDD Activity LED
- Power LED
- G Failure LED
- LAN1 & LAN2 LED
- Power Switch

Rear Panel Layout

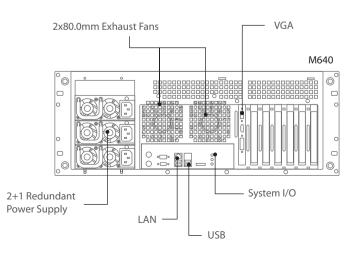

Hardware Specification

| Model No | M610 | M620 | M630 | M640 | | | |
|------------------------------------|----------------------------------------------------------|---------------------------|---------------------------|---------------------------|--|--|--|
| Processor | Intel Xeon 3220 2.4G | Intel Core2 Quad Q8400 | Intel Core2 Quad Q9400 | Intel Core2 Quad Q9400 | | | |
| Memory | DDR2-800 4G | DDR3-1333 4G | DDR3-1333 4G | DDR3-1333 4G | | | |
| Operation System | Windows XP Embedded OS | | | | | | |
| Hard Disk Drive (Hot Swappable) | 4 | 8 | 12 | 16 | | | |
| RAID Level | N/A | RAID 0,1,5,6 | RAID 0,1,5,6 | RAID 0,1,5,6 | | | |
| IP Camera License | 32 | 32 | 48 | 64 | | | |
| Megapixel Recording | D1,1.3M~10M | | | | | | |
| Display Port | 1 | 1 (2: Optional) | 1 (2: Optional) | 1 (2: Optional) | | | |
| LAN Port | Gigabit x 1 | | | | | | |
| USB Port | Front x 1 Rear x 2 | Front x 2 Rear x 4 | Front x 2 Rear x 4 | Front x 2 Rear x 4 | | | |
| Dimensions (DxWxH) mm | 569 x 430 x 43.5 | 660 x 430 x 88 | 660 x 430 x 132 | 660 x 430 x 176 | | | |
| Power Supply | 350W, Single | 600W,(1+1) Redundant | 600W,(1+1) Redundant | 800W,(2+1) Redundant | | | |
| Voltage | 100~240VAC(50~60Hz) | | | | | | |
| Remote Access | E100 / E200 / HD NVR Client / Web Client / PDA Client | | | | | | |

| Model No | M830 | M840 | | | | | |
|------------------------------------|----------------------------------------------------------|-----------------------|--|--|--|--|--|
| Hard Disk Drive (Hot Swappable) | 16 | 24 | | | | | |
| RAID Level | RAID 0, 1, 5, 6 (Optional) | | | | | | |
| Megapixel Recording | D1, 1.3~10M | | | | | | |
| Data Port | SAS JBOD | | | | | | |
| Dimensions (DxWxH) mm | 660 x 430 x 132 | 660 x 430 x 176 | | | | | |
| Power Supply | 760W, (1+1) Redundant | 760W, (2+1) Redundant | | | | | |
| Voltage | 100~240VAC(50~60Hz) | | | | | | |
| Remote Access | E100 / E200 / HD NVR Client / Web Client / PDA Client | | | | | | |

*All specifications are subject to change without notice

HD NVR Enterprise

Enterprise recording solution with unprecedented performance

M800 / M600 Series

