

PTZ Housings




PERIPHERAL


	SHP-4300H	SCX-DF300W	STH-380(N)PO	STH-370(N)PO/(N)PI	STH-360(N)PO	STH-370(N)PE	STB-370(N)PC	
Operating Temperature	-50°C ~ +50°C (-58°F ~ +122°F)	-10°C ~ +50°C (+14°F ~ +122°F)	-40°C ~ +50°C (-40°F ~ +122°F)	-20°C ~ +50°C (-4°F ~ +122°F)	-20°C ~ +50°C (-4°F ~ +122°F)	-10°C ~ +50°C (+14°F ~ +122°F)	-10°C ~ +50°C (+14°F ~ +122°F)	
Operating Humidity	0 ~ 90% RH	0 ~ 90% RH	0 ~ 90% RH	0 ~ 90% RH	0 ~ 90% RH	0 ~ 90% RH	0 ~ 90% RH	
Materials	Body	Aluminum + Poly carbonate	Poly carbonate + SECC	ALDC12	ALDC12	ALDC12	EGI 1.2T/ABS	PC + ABS
	Bubble	Poly carbonate	Poly carbonate	Poly carbonate	Poly carbonate	Poly carbonate	N/A	N/A
Ingress Protection	IP66	N/A	IP67	IP67	IP66	N/A	N/A	
Dimensions (WxHxD)	External	Ø228 x 256mm (Ø8.98" x 10.08")	Ø257 x 248mm (Ø10.12" x 9.76")	Ø253.5 x 285.8mm (Ø9.98" x 11.25")	Ø253.5 x 285.8mm (Ø9.98" x 11.25")	Ø253.5 x 285.8mm (Ø9.98" x 11.25")	Ø244 x 295.4mm (Ø9.61" x 11.63")	Ø164 x 41mm (Ø6.45" x 1.61")
	Internal	Ø195 x 230 (130 at Housing)mm (Ø7.68" x 9.06")	Ø186 x 242 (145 at Housing)mm (Ø7.32" x 9.53")	Ø206.15 x 168.4mm (Ø8.12" x 6.63")	Ø206.15 x 168.4mm (Ø8.12" x 6.63")	Ø200 x 167.5mm (Ø7.87" x 6.59")	Ø188 x 183mm (Ø7.4" x 7.2")	
Weight	2.5Kg (5.51 lb)	702g (1.55 lb)	3.2Kg (7.05 lb)	3.2Kg (7.05 lb)	2.08Kg (4.59 lb)	740g (1.63 lb)	1.3Kg (2.87 lb)	
Input Voltage	24V AC	N/A	24V AC	24V AC	24V AC	N/A	N/A	
Power Consumption	Max. 47W	N/A	Max. 49W	Max. 34W (STH-370PO)	Max. 34W	N/A	N/A	
Color	Light gray	White	Silver	Silver	Silver	Ivory	Silver	
Applicable Model	SCP-3430/2430	SCP-3430/2430	SNP-3370/3301	SNP-3370/3301	SNP-3370/3301	SNP-3370/3301	SNP-3370/3301	
	SCP-3250/2250	SCP-3250/2250						

Dimensions


Unit : mm (inch)

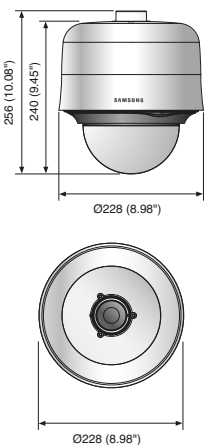


SHP-4300H

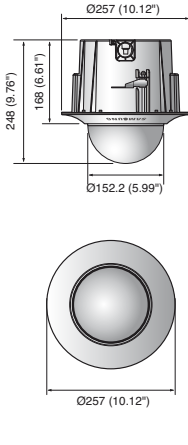


SCX-DF300W

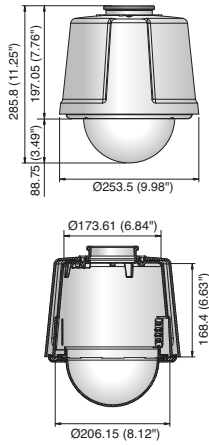


STH-380(N)PO/370(N)PO/(N)PI

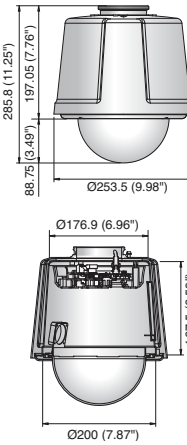

STH-360(N)PO

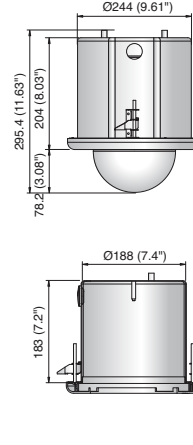

STH-370(N)PE

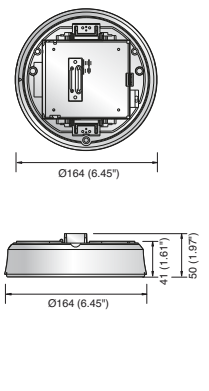

STB-370(N)PC