

ThinLine® II Reader

125 kHz Proximity

Low Profile Proximity Card Reader • 5395 (Wiegand) 5398 (Clock-and-Data)



ACCESS reliability.

Application


Providing performance and reliability, HID's attractive, unobtrusive ThinLine® II proximity card reader is housed in a two-piece, weatherproof secure potted enclosure.

Features

- ▶ Easily installed and maintained with the use of replaceable covers.
- ▶ Available with a Wiegand or Clock-and-Data interface.
- ▶ Provides high reliability, consistent read range and low power consumption.
- ▶ Features include multicolor LED and internal control or host control of the LED and beeper.
- ▶ Mounts directly on metal with minimal impact on the read range performance.
- ▶ Aesthetic design available in two cover designs and four colors to match any décor.
- ▶ Includes multilingual installation manual.

- Mounting** Mounts on a single-gang electrical box for easy installation. Mounts directly on metal with minimal impact on read range performance.
- Audiovisual Indication** A red LED flashes green and the beeper sounds when reader is presented with a proximity card. The multicolor LED and beeper can also be controlled individually by the host system.
- Diagnostics** On reader power-up, an internal self-test routine checks and verifies the setup configuration, determines the internal or external control of the LED and beeper and initializes reader operation. An additional external loop-back test allows for the reader outputs and inputs to be verified without the use of additional test equipment.
- Indoor/outdoor Design** Sealed in a rugged, weatherized polycarbonate enclosure designed to withstand harsh environments, providing reliable performance and a high degree of vandal resistance.
- Easily Interfaced** Wiegand output model interfaces with all existing Wiegand protocol access control systems. Clock-and-Data (magnetic stripe) model interfaces with most systems that accept magnetic stripe readers.
- Security** Recognizes card formats up to 85 bits, with over 137 billion unique codes.
- Warranty** Lifetime warranty against defects in materials and workmanship (see complete sales policy for details).
- Part Numbers** Base Part No.: 5395 Wiegand interface
Base Part No.: 5398 Clock-and-Data interface
Description: Tri-State LED, internal beeper on
- Options**
 - CLASSIC series cover in white, beige, charcoal gray or black (or)
 - Designer series cover in white, wave blue, charcoal gray or black
 - LED and beeper operation

(Please see "How to Order Guide" for a description of the options and associated part numbers.)

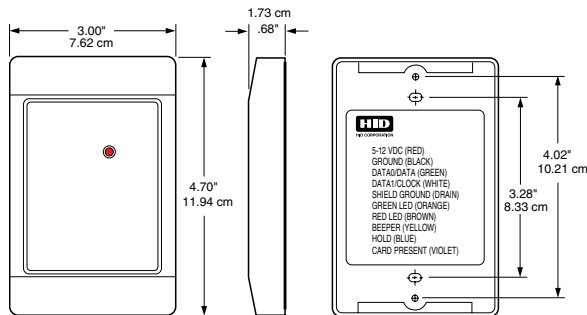

Typical Maximum* Read Range
 ProxCard® II card - up to 5.5" (14 cm)
 ISOProx® II card - up to 5" (12.7 cm)
 DuoProx® II card - up to 5" (12.7 cm)
 Smart ISO®/DuoProx® cards - up to 5" (12.7 cm)
 Proximity & MIFARE® card - up to 5" (12.7 cm)
 ProxCard® Plus card - up to 1.5" (3.8 cm)
 ProxKey® II keyfob - up to 2" (5.1 cm)
 MicroProx® Tag - up to 3" (7.6 cm)
 *Depending on local installation conditions.

Dimensions:
 4.70" x 3.00" x 0.68"
 (11.9 x 7.6 x 1.7 cm)

Material: Polycarbonate UL 94

Power supply:
 5-16 VDC
 Linear power supplies are recommended.

Current requirements:
 Average: 30 mA (5 VDC); 20 mA (12 VDC)
 Peak: 110 mA (5 VDC); 115 mA (12 VDC)

Operating temperature:
 -22° to 150° F (-30° to 65° C)

Operating humidity:
 0-95% relative humidity non-condensing

Weight:
 3.3 oz. (94 gm)


Transmit frequency: 125 kHz

Excite frequency: 125 kHz

Cable distance:
 Wiegand interface: 500 feet (150 m)
 Clock-and-data interface: 50 feet (15 m)
 Recommended cable is ALPHA 1295 (22 AWG) 5 conductor minimum stranded with overall shield or equivalent. Additional conductors may be required for LED or beeper control.

Certifications:
 Canada/UL 294 Listed
 FCC Certification, United States
 Canada Certification
 EU and CB Scheme Electrical Safety (EN60950 and IEC60950 ITE Electrical Safety)
 Fifteen EU Countries under the R&TTE Directive (EN 300 330 - SRD, and ETS 300 683 - EMC)
 CE Mark
 Australia C-Tick, New Zealand
 Taiwan, China

© 2007 HID Global. All rights reserved. HID, and the HID logo are trademarks or registered trademarks of HID Global in the U.S. and/or other countries. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners. Rev. 4/2007



MKT-PTHINLINEii_DS_EN



ACCESS experience.

hidcorp.com

HID Global Offices:

Corporate North America
 9292 Jeronimo Road
 Irvine, CA 92618-1905
 U.S.A.
 Phone: (800) 237-7769
 Phone: (949) 598-1600
 Fax: (949) 598-1690

Asia Pacific
 19/F 625 King's Road
 North Point
 Island East
 Hong Kong
 Phone: +852 3160-9800
 Fax: +852 3160-4809

Latin America
 Circunvalacion Ote. #201 B
 Despacho 2
 Col. Jardines del Moral
 Leon 37160, Gto.
 Mexico
 Phone: +52 477 779 1492
 Fax: +52 477 779 1493

Europe, Middle East & Africa
 Homefield Road
 Haverhill, Suffolk
 CB9 8QP
 England
 Phone: +44 (0) 1440 714 850
 Fax: +44 (0) 1440 714 840