


DS-2CC502P(N)-IR1(IR3) Analog IR Camera

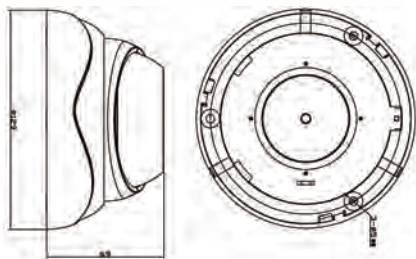

Key Features

- Compact design
- 1/3" Sony CCD
- Minimum Illumination: 0.1Lux/F1.2 (0 LUX with IR)
- Day/night auto switch
- Auto white balance, auto gain control, electronic shutter control and backlight compensation
- Internal synchronization
- Weather Proof: IP66 standard

Specifications

Camera

Image Sensor	1/3" SONY Super HAD CCD
Signal System	PAL / NTSC
Effective Pixel	PAL: 500 (H) × 582 (V) NTSC: 510 (H) × 492 (V)
Min. Illumination	0.1Lux @ F1.2 (0 Lux with IR)
Electronic Shutter Speed	1/50 (1/60)s to 1/100,000s
Lens	IR1: 6mm IR3: 12mm
Horizontal Resolution	420 TVL
Sync. System	Internal
Video Output	1Vp-p Composite Output (75Ω / BNC)
S/N Ratio	48dB
BLC	On

General

IR Distance	IR1 Series: 10 Meters IR3 Series: 30 Meters
Housing	IP66 Standard
Operating Temperature	-10°C ~ 60°C
Power Supply	12VDC
Power Consumption	IR1: 3W Max. IR3: 6W Max.
Dimensions	φ129mm×69mm
Weight	700 g