




DS-2CC512P(N)-FB Vandal Proof Color Dome Camera

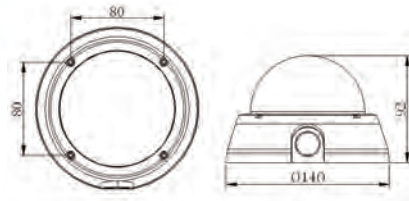

Key Features

- Compact design
- 1/3" Sony CCD
- Day/night auto switch
- Low Illumination: 0.1Lux@F1.2
- Auto white balance, auto gain control, electronic shutter control and backlight compensation
- Internal synchronization
- Impact Protection: IEC60068-275 test, Eh, 50J; EN50102, exceeding IK10

Specifications

Camera

Image Sensor	1/3" Sony Super HAD CCD
Signal System	PAL / NTSC
Effective Pixels	PAL: 752 (H) × 582 (V) NTSC: 768 (H) × 494 (V)
Min. Illumination	0.1Lux @ F1.2
Electronic Shutter Speed	1/50 (1/60)s to 1/100,000s
Day & Night	Electronic Shutter
Lens	3.5-8mm
Horizontal Resolution	480TVL
Sync. System	Internal
Video Output	1Vp-p Composite Output (75Ω / BNC)
S/N Ratio	48dB
BLC	On
Impact Protection	IEC60068-275 test, Eh, 50J; EN50102, exceeding IK10.

General

Operating Temperature	-10°C ~ 60°C
Power Supply	12VDC
Power Consumption	2W Max.
Dimensions	φ140mm × 92mm
Weight	660 g