


# DS-2CC52A2P(N)-IT3


## 700 TVL Outdoor EXIR Dome Camera

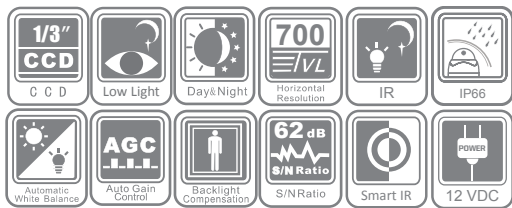

### Key features

- 1/3" CCD
- 700 TVL Horizontal Resolution
- Electronic Day/Night
- 0.001 lux /F1.2, 0.002 lux /F1.8
- Smart IR, high dynamic range
- Superior video image output and ultra low light illumination
- 40m IR Distance

### Dimensions

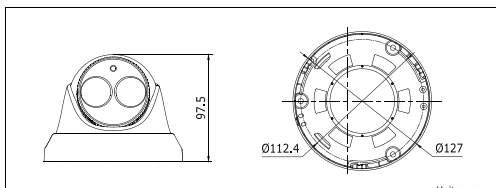

DS-2CC52A2P(N)-IT3	
Camera	
Image Sensor	1/3" CCD
Signal System	PAL/NTSC
Effective Pixels	PAL: 976 (H) × 582 (V) NTSC: 976 (H) × 494 (V)
Min. Illumination	0.001 Lux @ (F1.2, AGC ON), 0 Lux with IR 0.002 Lux @ (F1.8, AGC ON), 0 Lux with IR
Shutter speed	PAL: 1/50 s to 1/100,000 s NTSC: 1/60 s to 1/100,000 s
Lens	3.6 mm @ F1.8 (2.8mm, 6 mm, 8 mm, 12mm, 16 mm optional) Angle of view: 70° (3.6 mm)
Lens Mount	M12
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 75°, Rotation: 0 - 360°
Day & Night	Electronic
Horizontal Resolution	700 TVL
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 62 dB
BLC	On
General	
Working Temperature/Humidity	-30 °C - 60 °C (-22 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 VDC
Power Consumption	Max. 5 W
Ingress Protection	IP66
IR Range	40 meters
Dimensions	Φ 127× 97.5 mm ( φ 5" × 3.84")
Weight	650 g (1.433 lbs)

### Available models

PAL: DS-2CC52A2P-IT3  
NTSC : DS-2CC52A2N-IT3

### Accessories



DS-1229ZJ-1  
(Wall Mount)



DS-1239ZJ-1  
(Wall Mount)