


# DS-2CE15C2P(N)-IR


## 720 TVL PICADIS Outdoor IR Bullet Camera

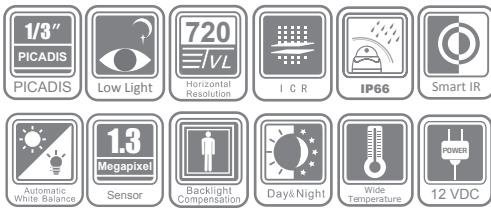

### Key features

- 1/3" PICADIS
- 1.3MP Sensor: 1280 (H) x 960 (V) Effective Pixels
- 720 TVL Horizontal Resolution
- True Day/Night
- 2.8/3.6/6mm Fixed Lens, 0.1 lux /F1.2
- 20m IR Distance
- Smart IR, high dynamic range
- Superior video image output and ultra low light illumination
- Wide operating temperature range
- IP66 Weatherproof

### Dimensions

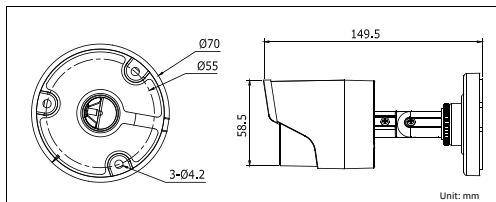

| DS-2CE15C2P(N)-IR            |   |
|------------------------------|---|
| Camera                       |   |
| Image Sensor                 | 1/3" PICADIS  |
| Signal System                | PAL/NTSC  |
| Effective Pixels             | 1280 (H) x 960 (V)  |
| Min. Illumination            | 0.1 Lux @ (F1.2,AGC ON),0 Lux with IR                                     |
| Shutter speed                | PAL: 1/25 s to 1/25,000 s<br>NTSC: 1/30 s to 1/30,000 s                   |
| Lens                         | 3.6 mm (2.8mm,6 mm optional)  |
|                              | Angle of view: 71.4° (3.6 mm)   |
| Lens Mount                   | M12   |
| Angle Adjustment             | Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360°                          |
| Day & Night                  | IR cut filter with auto switch  |
| Horizontal Resolution        | 720 TVL   |
| Synchronization              | Internal synchronization  |
| Video Output                 | 1Vp-p composite output (75 Ω/BNC)   |
| S/N Ratio                    | More than 62 dB   |
| General                      |   |
| Working Temperature/Humidity | -40 °C - 60 °C (-40 °F - 140 °F)<br>Humidity 90% or less (non-condensing) |
| Power Supply                 | 12 V DC   |
| Power Consumption            | Max. 1.5 W<br>(Max. 4.5 W with IR cut filter on)                          |
| Ingress Protection           | IP66  |
| IR Range                     | 20 meters   |
| Dimensions                   | Φ70×149.5 mm (Φ2.76"×5.89")   |
| Weight                       | 360 g (0.79 lbs)  |

### Available models

PAL: DS-2CE15C2P-IR, DS-2CE15C2P-IR (Grey)  
NTSC : DS-2CE15C2N-IR, DS-2CE15C2N-IR (Grey)