


DS-2CE1682P(N)-IT3

600TVL EXIR Outdoor Bullet Camera




EXIR

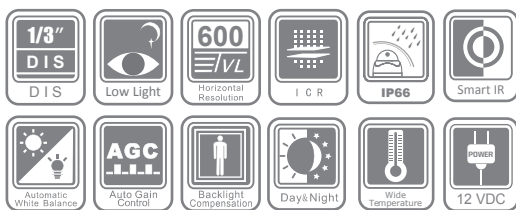

Key features

- 1/3" DIS
- EXIR Technology
- True Day/Night
- 600 TVL Horizontal Resolution
- 40m IR Distance
- Smart IR
- IP66 Weatherproof
- Wide Operating Temperature Range

Dimensions

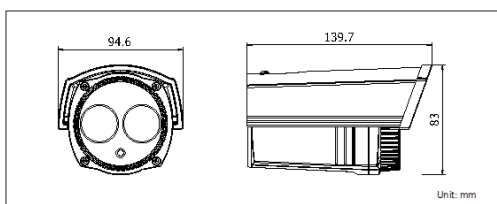

Accessories



DS-1212ZJ
(wall mount)



DS-1214ZJ
(pole mount)



DS-1215ZJ
(pole mount)

DS-2CE1682P(N)-IT3	
Camera	
Image Sensor	1/3" DIS
Signal System	PAL/NTSC
Effective Pixels	720(H)×480(V)
Min. Illumination	0.1 Lux @ (F1.2, AGC ON), 0 Lux with IR 0.2 Lux @ (F2.3, AGC ON), 0 Lux with IR
Shutter speed	PAL: 1/25 s to 1/15,000 s NTSC: 1/30 s to 1/15,000 s
Lens	12mm @ F1.8(3.6mm,6mm,8mm,16mm optional)
Lens Mount	M12
Day & Night	IR cut filter with auto switch
Horizontal Resolution	600 TVL
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 52 dB
General	
Working Temperature/ Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 VDC
Power Consumption	MAX.5W (Max. 8.5 W with IR cut filter on)
Ingress Protection	IP66
IR Range	40 meters
Dimensions	Φ 94.6×83×139.7mm(Φ 3.72"×3.27"×5.5")
Weight	600 g (1.32 lbs)

Available models

PAL: DS-2CE1682P-IT3

NTSC: DS-2CE1682N-IT3