


DS-2CE1682P(N)-IT5

600 TVL DIS EXIR Bullet Camera




EXIR

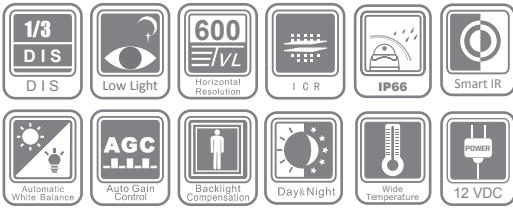

Key features

- 1/3" DIS
- EXIR Technology
- True Day/Night
- 600 TVL Horizontal Resolution
- 80m IR Distance
- Smart IR
- IP66 Weatherproof
- Wide Operating Temperature Range

Dimensions

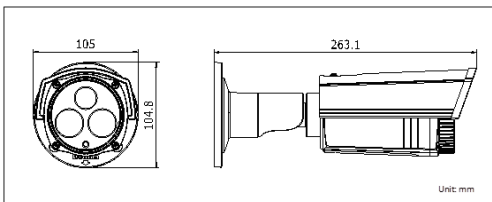

Accessories



DS-1215ZJ
(pole mount)

DS-2CE1682P(N)-IT5	
Camera	
Image Sensor	1/3" DIS
Signal System	PAL/NTSC
Effective Pixels	720(H)×480(V)
Min. Illumination	0.1 Lux @ (F1.2,AGC ON),0 Lux with IR
Shutter speed	PAL: 1/25 s to 1/15,000 s NTSC: 1/30 s to 1/15,000 s
Lens	3.6mm (6mm,8mm,12mm,16mm optional) Angle of view: 68.4° (3.6 mm)
Lens Mount	M12
Day & Night	IR cut filter with auto switch
Horizontal Resolution	600 TVL
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 52 dB
General	
Working Temperature/Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 V DC
Power Consumption	Max. 5 W
Ingress Protection	IP66
IR Range	80 meters
Dimensions	105 × 104.8 × 263.1mm(4.13" × 4.13" × 10.36")
Weight	800 g (1.76 lbs)

Available models

PAL: DS-2CE1682P-IT5
NTSC: DS-2CE1682N-IT5