


# DS-2CE55A2P(N)


## 700TVL DIS Dome Camera

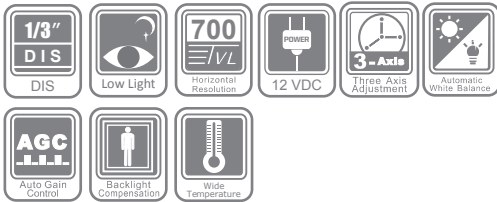

### Key features

- 700 TVL Horizontal Resolution
- Electronic Day/Night
- 2.8/3.6/6mm Fixed Lens
- 0.1 lux /F1.2
- Wide Operating Temperature Range:  
-40°C to 60°C(-40°F to +140°F)

### Dimensions

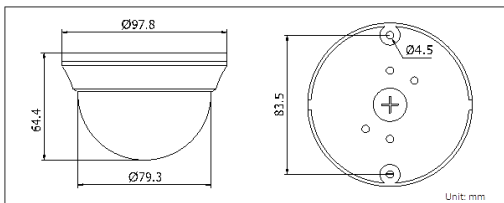

DS-2CE55A2P(N)	
<b>Camera</b>	
Image Sensor	1/3" DIS
Signal System	PAL/NTSC
Effective Pixels	976 (H) × 496 (V)
Min. Illumination	0.1 Lux @ (F1.2,AGC ON)
Shutter speed	PAL: 1/50 s to 1/100,000 s NTSC: 1/60 s to 1/100,000 s
Lens	3.6 mm (2.8mm,6 mm optional) Angle of view: 68.4° (3.6 mm)
Lens Mount	M12
Angle Adjustment	Pan: 0 - 355°;Tilt: 0 - 90°; Rotation: 0 - 355°
Day & Night	Electronic
Horizontal Resolution	700 TVL
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 62 dB
<b>General</b>	
Working Temperature/ Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 V DC
Power Consumption	Max. 1W
Dimensions	∅ 97.8 x 64.4 mm (φ 3.85" x 2.54")
Weight	300 g (0.66 lbs)

### Order Models

DS-2CE55A2P  
DS-2CE55A2N