


DS-2CE55A2P(N)-IRP


700TVL DIS Indoor IR Dome Camera

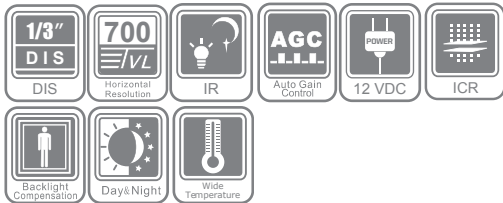

Key features

- 700 TVL Horizontal Resolution
- True Day/Night
- 2.8/3.6/6mm Fixed Lens, 0.1 lux /F1.2
- 20m IR Distance
- Wide Operating Temperature Range:
-40°C to 60°C(-40°F to +140°F)

Dimensions

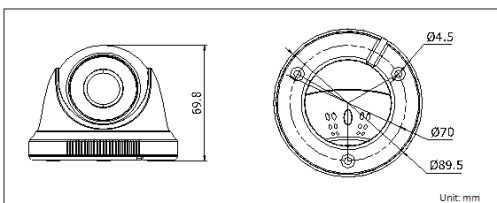

| DS-2CE55A2P(N)-IRP | |
|----------------------------------|---|
| Camera | |
| Image Sensor | 1/3" DIS |
| Signal System | PAL/NTSC |
| Effective Pixels | 976 (H) × 496 (V) |
| Min. Illumination | 0.1 Lux @ (F1.2,AGC ON), 0 Lux with IR |
| Shutter speed | PAL: 1/50 s to 1/100,000 s NTSC: 1/60 s to 1/100,000 s |
| Lens | 3.6 mm (2.8mm,6 mm optional) |
| | Angle of view: 68.4° (3.6 mm) |
| Lens Mount | M12 |
| Angle Adjustment | Pan: 0 - 360°;Tilt: 0 - 75°; Rotation: 0 - 360° |
| Day & Night | IR cut filter with auto switch |
| Horizontal Resolution | 700 TVL |
| Synchronization | Internal synchronization |
| Video Output | 1Vp-p composite output (75 Ω/BNC) |
| S/N Ratio | More than 62 dB |
| General | |
| Working Temperature/ Humidity | -40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing) |
| Power Supply | 12 V DC |
| Power Consumption | Max. 1.8W (Max. 4W with IR cut filter on) |
| IR Range | 20 meters |
| Dimensions | Φ89.5 × 69.8 mm(Φ3.52" × 2.75") |
| Weight | 200 g (0.44 lbs) |

Order Models

DS-2CE55A2P-IRP
DS-2CE55A2N-IRP

Accessories



DS-1229ZJ-1
(Wall Mount)



DS-1239ZJ-1
(Wall Mount)