


DS-4002MDI PCI Matrix Decode Board

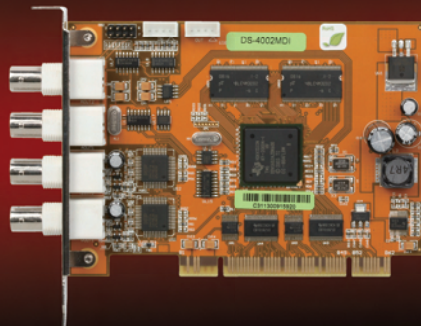

Key Features

- 4-ch CIF/2CIF real time decoding, or 2-ch 4CIF real time decoding, or 1-ch 4CIF with 3-ch CIF real time decoding
- 2-ch audio and video outputs
- Up to 16 multiplex windows
- Video output resolution up to 4CIF+2xQCIF

Specifications

Video/Audio Output

Video Output	2
Video Output Interface	BNC, 1.0Vp-p, 75Ohm
Decoding Resolution	4CIF/2CIF/CIF/QCIF
Audio Output	2
Audio Output Interface	BNC, Linear output, 600Ω
Audio Decoding	4
Frame Rate (Per Channel)	4CIF: 25(P)/30(N)fps CIF: 25(P)/30(N)fps

General

Power Consumption	< 3.5W
Operating Temperature	-10°C ~ 50°C
Humidity	10% ~ 90%
Size	133mmx96mm

System Requirement

OS	Windows 2000/XP/2003/Vista, Redhat 9.0, Fedora 3, Fedora 4, Fedora 5, Fedora 6, Fedora 7, Fedora 8
CPU	Intel Series
Motherboard	Based on Intel 845 / 865 / 915 / 925 / 945 / 965 / Core2 / Core4 Chipset
Memory	256MB or Above
Display Adapter	Display Adapter Driver Must Support BLT. Please Refer to Hikvision Website (www.hikvision.com) for Recommended Models.