

## DS-7208/7216HVI-S Standalone DVR




DS-7208HVI-S



DS-7216HVI-S

### Key Features

- Each channel supports up to CIF real-time encoding
- VGA output
- 2 SATA interface

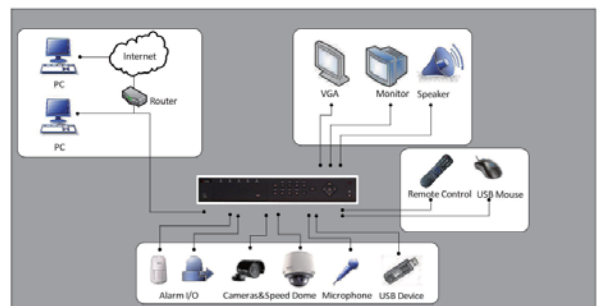

### Specifications

		DS-7208HVI-S	DS-7216HVI-S
Video/Audio input	Video compression	H.264	
	Video input	8-ch	16-ch
	Video input interface	BNC(1.0Vp-p, 75Ω), PAL/NTSC adaptive	
	Audio compression	OggVorbis, 16kbps	
	Audio input	4-ch	
	Audio input interface	RCA (2.0~2.4Vp-p, 1KΩ)	
Video/Audio output	Voice talk input	1-ch, (Using Audio IN)	
	Preview resolution	PAL: 704×576, NTSC: 704×480	
	VGA output	1 VGA interface can support resolution: 1024×768/60Hz	
	Recording resolution	CIF/QCIF	
	Video output	2-ch, BNC(1.0Vp-p, 75Ω)	
	Video loop output	8-ch, DB15 (Optional)	16-ch, DB15
	Frame rate	PAL: 25fps, NTSC: 30fps	
	Video bit rate	32Kbps~768Kbps, or user-defined	
	Audio output	1-ch, RCA(linear electrical level, 600Ω)	
	Hard disk driver	Interface type	2 SATA interface
Capacity		Each interface supports up to 2TB capacity	
External interface	Network Interface	1, RJ45 10M/100M adaptive Ethernet interface	
	Serial Interfaces	1 RS-232 interface (for parameters configuration, maintenance, transparent channel); 1 RS-485 interface (for PTZ control);	
	USB interface	2, USB2.0	
	Alarm input	16-ch	
General	Alarm output	4-ch	
	Power supply	12VDC	
	Consumption	≤40W (without HDD or DVD-R/W)	
	Working temperature	-10°C~+55°C	
	Working humidity	10%~90%	
	Chassis	19" standard chassis	
	Dimension (mm)	290mm(D)×445mm(W)×44mm(H)	390mm(D)×440mm(W)×70mm(H)
	Weight	≤8Kg (without HDD or DVD-R/W)	