


DS-7324/32HI-SH


Standalone DVR

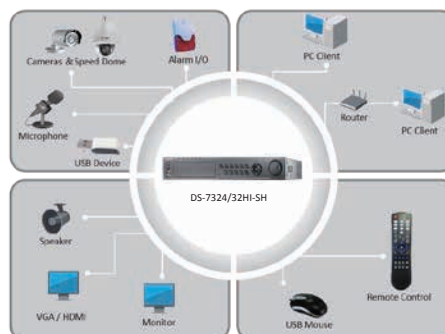

Key features

- H.264 video compression
- Up to 32-ch video input
- 2CIF resolution real-time recording
- HDMI and VGA output at up to 1920×1080P resolution
- Dual-stream
- Gigabit network interfaces
- 16-ch synchronous playback
- HDD quota and group management

Rear Panel of DS-7332HI-SH



1. MAIN VIDEO OUT, SPOT VIDEO OUT
2. VIDEO IN
3. AUDIO OUT(CVBS/VGA), RCA Connector
4. LINE IN
5. AUDIO IN, RCA Connector
6. VGA Interface
7. HDMI Interface
8. USB Interface
9. LAN Network Interface
10. RS-232 Interface
11. Termination Switch
12. RS-485, Keyboard Serial Interface
13. ALARM IN, ALARM OUT
14. eSATA Interface
15. GND
16. 110~240VAC Power Input
17. Power Switch

DS-7324HI-SH		DS-7332HI-SH
Video/Audio input		
Video compression	H.264	
Video input	24-ch	32-ch
Video input interface	BNC (1.0 Vp-p, 75 Ω), PAL /NTSC self-adaptive	
Audio compression	G.711u	
Audio input	4-ch, RCA (2.0 Vp-p, 1 kΩ)	
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 kΩ)	
Video/Audio output		
HDMI/VGA output	1-ch, resolution: 1080P: 1920×1080/60Hz, SXGA: 1280×1024/60Hz, 720P: 1280×720/60Hz, XGA: 1024×768/60Hz	
CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480	
Video spot out	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480	
Encoding resolution	WD1 / 4CIF / 2CIF / CIF / QCIF	
Frame rate	WD1 / 4CIF: 15 fps 2CIF / CIF / QCIF: 25 fps (P) / 30 fps (N)	
Video bit rate	32 Kbps ~ 3072 Kbps, or user defined (Max. 3072 Kbps)	
Audio output	2-ch, RCA (Linear, 600 Ω)	
Audio bit rate	64 Kbps	
Dual-stream	Support; Sub-stream: CIF / QCIF @ 25 fps (P) / 30 fps (N)	
Stream type	Channel 1-4: Video, Video & Audio; Other channels: Video	
Synchronous playback	16-ch	
Hard disk		
SATA	4 SATA interfaces for 2 HDDs + 1 DVD-R/W (default), or 4HDDs	
eSATA	1 eSATA interface	
Capacity	Up to 4TB capacity	
External interface		
Network interface	1, RJ45 10M / 100M / 1000M Ethernet interface	
Serial interface	RS-232, RS-485 (full-duplex), Keyboard	
USB interface	3 × USB 2.0	
Alarm in/out	16/8	
General		
Power supply	100~240VAC, 5A, 50~60Hz	
Consumption (without HDD or DVD-R/W)	≤ 40 W	
Working temperature	-10°C ~+55°C	
Working humidity	10% ~ 90%	
Chassis	19-inch rack-mounted 1.5U chassis	
Dimensions(W × D × H)	445 × 390 × 70 mm	
Weight	≤ 5 kg(without HDD or DVD-R/W)	