


DS-8104AHLI-S ATM/POS DVR



Key Features

- User-friendly menu and easy to operate
- Support local preview, storage and playback
- Digital zoom when preview and playback
- Support redundant recording and hard disk group management
- Dual stream

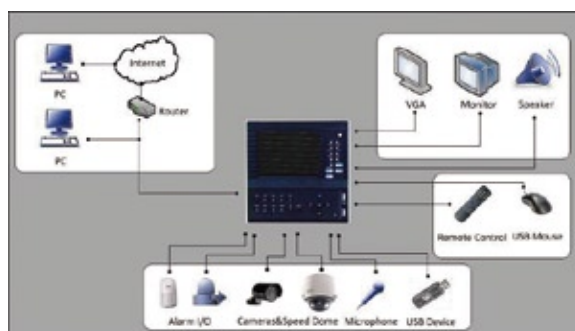

Specifications

		DS-8104AHLI-S
Video/Audio input	Video compression	H.264
	Video input	4-ch
	Video input interface	BNC(1.0Vp-p, 75Ω)
	Audio compression	OggVorbis
	Audio input	4-ch
	Audio input interface	BNC (2.0Vp-p, 1kΩ)
	Voice talk input	1-ch, BNC (2.0Vp-p, 1kΩ)
Video/Audio output	Preview resolution	PAL: 704x576; NTSC: 704x480
	VGA output	1, resolution: 1024x768/60Hz
	Recording resolution	CIF/QCIF
	Video output	1-ch BNC (1.0Vp-p, 75Ω), 1-ch RCA (1.0Vp-p, 75Ω)
	Frame rate	CIF: 25(P)/30(N) fps
	Stream type	Video/Video&Audio
	Dual streams	Yes
	Video bit rate	32Kbps~768Kbps, user-defined
	Audio output	1-ch BNC (linear, 600Ω) 1-ch RCA (linear, 600Ω)
	Synchronous playback	4-ch playback
Hard disk driver	Interface type	4 SATA interface
	Capacity	Each interface supports up to 2TB capacity
	External interface	1 RJ45 10M/100M UTP network port 1 RJ45 RS-232 port, 1 RJ45 RS-485 port
External interface	USB interface	3, USB2.0
	Alarm input	5-ch
	Alarm output	2-ch
	LCD screen	5"
General	Power supply	100~240V AC, 47~63 Hz
	Consumption	≤40W (without hard disk)
	Working temperature	-10°C~+55°C(14°F~131°F)
	Working humidity	10%~90%
	Dimension	180(H)×180(W)×280mm(D)(7.09"(H)×7.09"(W)×11.02"(D))
	Weight(without HDD)	≤5000g(11.02lbs)