

DS-D5084UL 84" 4K Monitor


key Features

- Support 10bit LVDS(3840×2160) HD display;
- Adopt 3-D digital comb filter;
- Support audio output;
- True color OSD and user-friendly operation menu;
- 2 channel HDMI 1.4 input interface;
- Adopt 3D noise reduction technology;
- Support USB interface;

Model:

DS-D5084UL

Dimension:

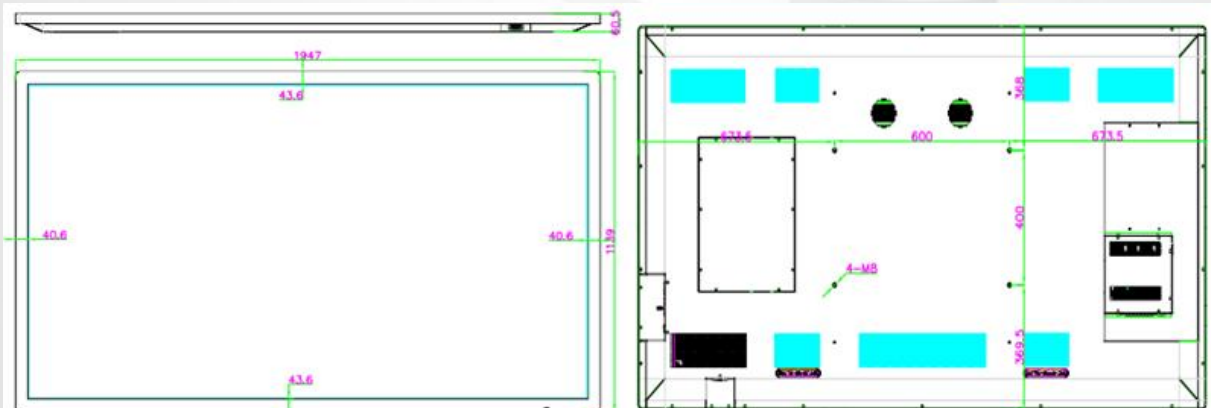

DS-D5084UL

84" 4K Monitor



Model	DS-D5084UL	
Display Type	TFT-LED Backlight	
Screen Size	84.04"	
Dot Pitch (H×V)	0.4845mm×0.4845mm	
Resolution	3840×2160	
Brightness	350cd/ m²	
Contrast	1600:1	
Response Time	5ms	
Color	1.06B	
Viewable Area (H×V)	1860.48mm×1046.52mm	
Viewing Angle	Horizontal 178°, Vertical 178°	
Interfaces	VGA Input	1
	AV Input	1
	AV Output	1
	HDMI Input	2(2 channel HDMI1.4 input 3840×2160@30HZ)
	HDMI Output	1
	UHD Input	2
	YPbPr Input	1
	PC AUDIO Input	1
	COAX Output	1
	USB	1
	EARPHONE Output	1
	Built-in Speaker	2 * 10W
Power Supply	100 ~ 240V AC, 50/60Hz	
Power Consumption	≤ 500W(Normal working),≤1W(Standby)	
Operation Condition	0°C ~ 40° C(Temperature), 20%~80%(Humidity)	
Storage Condition	-10°C ~ 60°C° (Temperature), 10%~90%(Humidity)	
Dimension	1947mm×1139mm×65.03mm	
Package Dimension	2210mm×1480mm×400mm	
Screw Aperture	600mm*400mm	
Weight	121±1.5Kg(Gross weight) , 91Kg±1.5 Kg(Net weight)	