

ExitView[®]

Height Strip Camera

ExitView is Honeywell Video Systems' discreet and cost-effective solution for loss prevention, shrinkage, and robbery. Identify and apprehend — it is the latest advancement for business protection that combines a CCD camera with a height strip and is one of the most inexpensive solutions to tighten in-store security and make it tougher for criminals to take advantage of you and get away with it.

A high performance CCD camera within a height strip that can be mounted on or beside the door-frame, ExitView captures the face of the culprit at eye level, in full color, as they exit your premises. With visual identification, apprehension of the offender and recovery of your goods is easier than ever before.

With ExitView, you can do more than hire a corporate security staff to protect your business. This value-priced surveillance solution is plug and play, making installation quick and easy. Ideal for retail applications — banks, convenience stores, gas stations, malls, fast food restaurants, small businesses, cashier areas, and many other commercial enterprises.

FEATURES

- High performance CCD camera
- Functional height strip
- Available in silver and black, with or without the height strip markings, to blend with your decor
- Plug and play installation
- Discreet, value-priced surveillance solution to prevent loss, shrinkage, and robbery
- For an extended field of view, an optional 15° angled adapter is available
- Comes pre-focused from the factory and includes the power supply for North American models.
- NTSC or PAL

ExitView®

Height Strip Camera

SPECIFICATIONS

Imager Format

- 1/3" CCD

Lens

- 3.7 mm semi-pinhole f2.0
- field of view: 66" H x 52" V
- number of elements: 4

Video Output

- 1 Vp-p into 75 ohms

Resolution

- 350 TV lines

Light Sensitivity

- 0.9 lux @ f2.0

Electronic Iris

- 1/60 (1/50 PAL) to 1/100,000

S/N Ratio

- 51 dB (AGC off)

Backlight Compensation

- Automatic

White Balance

- AWB

Input Voltage

- 12 VDC \pm 10% reverse polarity protected

Current Consumption

- 150 mA @ 12 VDC

Operating Temperature

- 20°C to +50°C (-4°F to 122°F)

Power Supply

- 12 VDC Regulated class 2 transformer (NTSC); N/A (PAL)

Video Cable

- Use minimum type RG-59, copper clad steel core, 95% braided shield

Power Cable

- Use 18 gauge stranded wire (Do not run more than 100 feet from transformer)

Weight

- 1.4 lbs (0.65 kg)

Dimensions (W x H x D)

- 1.9 in. x 34.25 in. x 1.2 in. (48 mm x 870 mm x 29 mm)

Enclosure

- Extruded Aluminum Housing (available in silver or black)

Height Strip

- Scratch Coated Acrylic

Warranty

- 2 years


Patents

- 97508 - Canada, pending - USA

ORDERING

HS37N-S	ExitView, NTSC, silver, height strip
HB37N-S	ExitView, NTSC, black, height strip
HS37P-S	ExitView, PAL, silver, height strip
HB37P-S	ExitView, PAL, black, height strip
HS37N-B	ExitView, NTSC, silver, black window
HB37N-B	ExitView, NTSC, black, black window
HS37P-B	ExitView, PAL, silver, black window
HB37P-B	ExitView, PAL, black, black window
HS-AM	15° Angle adapter, silver
HB-AM	15° Angle adapter, black

ExitView® is a registered trademark of Honeywell International Inc. Design and specifications subject to change without notice.

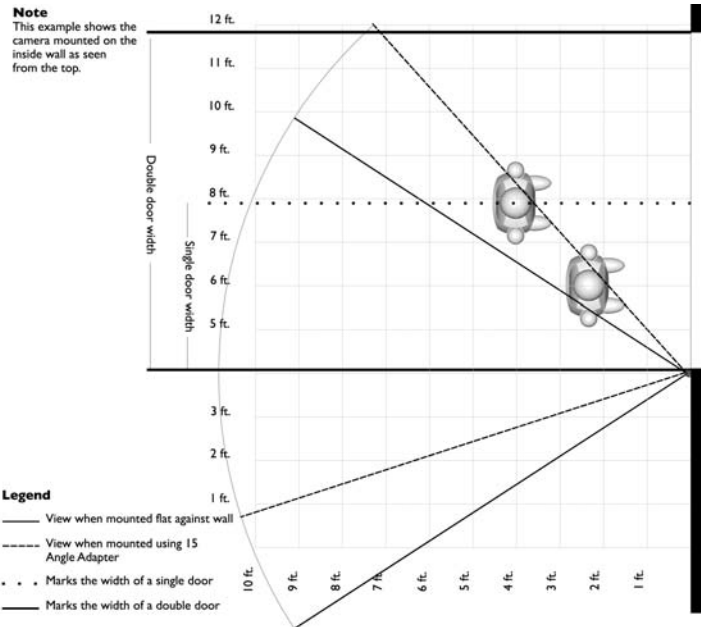

Honeywell Video Systems

171 Eileen Way
Syosset, NY 11791
800 796 CCTV
www.honeywell.com

L/EVIEW/D
January 2005
©2005 Honeywell International Inc.

Honeywell