

## HRSD8/16-D SERIES

### 8 AND 16 CHANNEL EMBEDDED DIGITAL VIDEO RECORDERS

The HRSD Series digital video recorder (DVR) combines the benefits of digital recording with the advanced processing of a multiplexer. The HRSD DVRs feature Honeywell's sophisticated, proprietary XtraStor compression technology that provides more storage on smaller media without sacrificing image quality – resulting in days, weeks and even months of high-resolution video storage.

Recording at a rate of up to 100 ips PAL, HRSD supports configurable ips per camera and other high-end recording capabilities to efficiently capture and provide long-term storage of video, text, and audio. Multiple search engines enable the user to quickly find the evidence detail. Transfer of video evidence is fast and easy using the clip-copy function which allows video, audio, and text evidence to be burned onto a USB stick via the front panel USB port or CD/DVD-R using the internal DVD-RW. A viewer executable is included with each clip, which eliminates the need to install a viewer separately to the evidence viewing PC. This maximises ease-of-use for anyone who needs to view the evidence after the occurrence of a fraudulent event.

The same powerful Remote Administration System Plus (RASplus) software used for HRXD is also used by HRSD. The RASplus advanced feature set includes simultaneous connection of up to 16 sites over a digital network. Users can configure and download software updates to remote DVRs from a central site, saving time and money by eliminating the need for many site visits.

### Market Opportunities

When combined with an external interface/filter device such as SmartPIT®, the HRSD Series becomes a desirable solution for many retail or financial surveillance applications by providing an interface to POS and ATM systems.

For surveillance systems integrating multiple devices that need to share a single time reference, SNTP allows the HRSD's time clock to be synchronised to an external time reference.

### Features:

- 8 or 16 looping video inputs
- Continues recording while transmitting to remote site and during playback
- Built-in DVD-RW drive and 2 USB 2.0 ports
- WebGuard - remote access via web browser (only available with model HRSD8DX and HRSD16DX DVRs)
- Mouse (not included) interface via USB port
- Time synchronisation between DVR and time server or other DVR
- PTZ dome control for a wide variety of protocols
- Remote access through PSTN, LAN/WAN (internal NIC) and DSL (remote access software included)
- Multiple search engines (date/time, calendar, event, text-in)
- Multiple recording modes (time-lapse, pre-event, alarm, motion, text and panic)
- Linux OS — OS embedded in flash



## HRSD8/16-D SERIES

### SPECIFICATIONS


RAS Plus Software	
Sessions Maximum per HRSD recorder	14 simultaneous connections
Administration	2 sessions
Users Viewing Live Video (and activating outputs)	10 sessions
Users Retrieving Video	2 sessions
Compatibility	Microsoft Windows XP or Vista; see RASplus User Guide for additional detail. Doc. 900.0857
Recorder Unit	
Video Standard	NTSC or PAL (Auto Detect)
Video Display Format	720 x 576 (PAL)
Colour Control	Brightness, contrast, hue and saturation
Recording and Transmission Compression Algorithm	XtraStor compression technology
Record Mode	(FIFO) Continuous buffer
Recording Capacity	Hard Drive 250 GB or 500 GB, see 'Ordering' section for details.
Recording Rate (Global)	100 ips (PAL)
Video Resolution Settings	Standard: 336 x 272 (PAL) High: 672 x 272 (PAL)
Video Motion Detection	Configurable zone detection area and sensitivity
Video Motion Search	Configurable zone of interest and sensitivity level. Includes clip list with preview image
POS/ATM interface*	8 serial text streams (max) interface via USB. RS232 port accepts single data stream with multiplexed data from up to 8 or 16 terminals
Event Recording and Reporting	Input via – alarm i/p contacts, motion and POS/ATM text data.reporting via internal buzzer,alarm o/p contacts, RAS(plus) and e-mail notification
Removable Media	Built-in DVD-RW 2 – USB ports
Still Image	Bitmap or JPEG file format using RASplus
Front Panel Control	Intuitive operation supports mouse connection to USB port
SNTP Client	Synchronise timing to SNTP servers
DHCP Enabled	DHCP or Manual IP entry and ADSL with PPPoE
Port number set-up	Individual entries for remote admin, remote watch, remote search, remote callback
PTZ Protocols Support	Support for up to 50 PTZ protocols
Language Support	English, French, Spanish, Dutch, Italian, Portuguese and German
Internal Buzzer	Selectable upon alarm or event

Connections	
Video Input	8 or 16 – Looping, BNC 1.0 Vp-p @ 75 Ohms, Auto Terminating
Video Output	1 – Composite, BNC 1.0 Vp-p @ 75 Ohms 1 – VGA alternative to using BNC 1 – Spot, BNC 1.0 – Vp-p @ 75 Ohms
Audio Input/Output	2 – Line level, RCA 1 – Line Out, RCA
Alarm/Control Inputs General Purpose	8 or 16 TTL programmable as NC or NO, 4.3V threshold
Alarm Reset Input	1 TTL terminal block
Control Outputs	2 relay outputs, terminal blocks, programmable as NC or NO, 0.5 A @ 125 VAC, 1 A @ 30 VDC
Serial Ports	1 – RS232-C DB9 (P) 2 – USB (2.0) 1 – RS485 port
Primary Storage	Internal HDD
Networking	10/100 base Ethernet (RJ-45)
Electrical	
Input Voltage	100 – 240 VAC, 2 A, 60 – 50 Hz, Autosensing
Power Consumption	90 Watts
Mechanical	
Dimensions (W x H x D)	430 mm x 89 mm x 414 mm
Weight	Unit: 7.3kg Shipping: 12.3kg
Construction	Housing: Steel chassis Finish: Black matt paint
Environmental	
Temperature	Operating: 5°C to 40°C Storage: 0°C to 60°C
Relative Humidity	0% - 90%, non-condensing
Regulatory	
Emissions	FCC: Part 15 Subpart B, Class A CE: EN 55022:2006 Class A EN61000-3-2:2006 EN61000-3-3:1995+A1:2001+A2:2005
Immunity	EN50130-4:1995+A2:2003
Safety U.S. and Canada International	UL: 60950, First Edition (2003) CSA C22.2 No. 60950-1-03 First Edition April 1, 2003 CE: IEC60950-1:2001 (First Edition) and/or EN60950-1:2001

\*May require external SmartPIT® interface. See Accessories section of this datasheet.

## HRSD8/16-D SERIES

### SYSTEM DRAWING

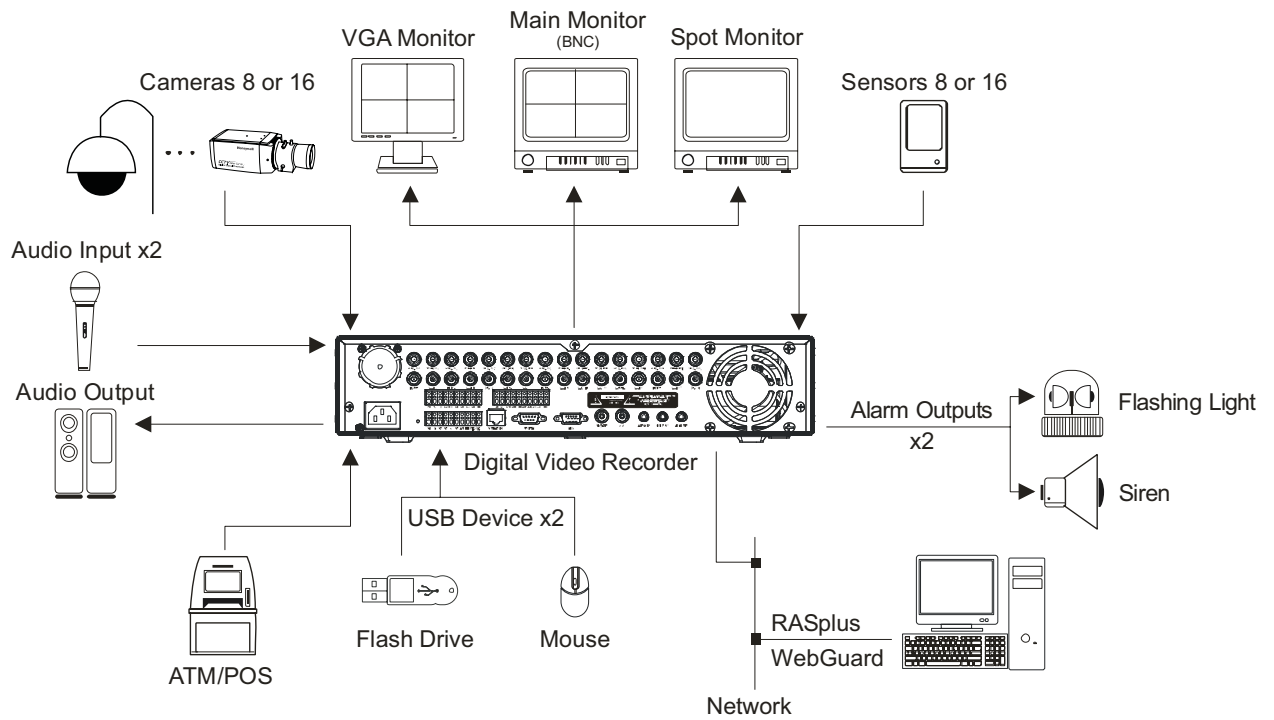


# HRSD8/16-D SERIES


## ACCESSORIES, DIMENSIONS, ORDERING

Recommended Accessories	
POS/ATM Interface	
HASMPIT	SmartPIT®, POS/ECR or ATM text inserter
Monitors	
HMLCD19e2X	19" e-Series Colour LCD Monitor (VGA)
HMLCD17LX	17" L-Series Colour LCD Monitor (VGA)

Recommended Accessories, cont.	
Cameras	
HCU484X	Ultra-wide dynamic high resolution body camera
HD3 Series	Super high resolution 3" mini-dome cameras
HD4D Series	Super high resolution day/night vandal resistant mini-dome cameras
ACUIX™	High-performance PTZ cameras
Surge Protection	
HCSP1	Camera Surge Protector
HDSP1	PTZ Dome Surge Protector

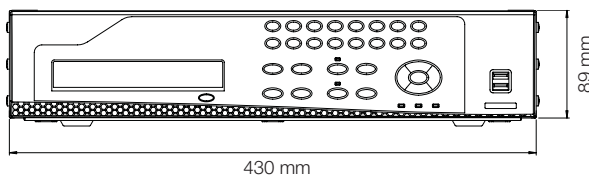

Front View (16 ch)

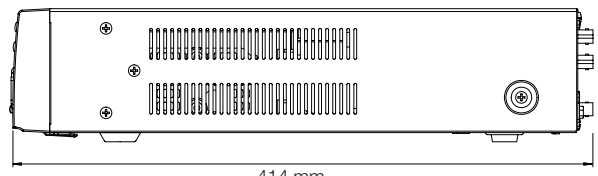

Side View

Ordering				
HRSD16	D	500	X	
				<b>Signal Format</b>
				x PAL NTSC
				<b>Storage</b>
				1500 GB Fixed IDE HDD*
				1000 GB Fixed IDE HDD*
				750 GB Fixed IDE HDD*
				500 GB Fixed IDE HDD
				250 GB Fixed IDE HDD
				<b>DVD-RW</b> D = Internal DVD-RW drive
				<b>Model</b>
				HRSD16 16 channel DVR
				HRSD8 8 channel DVR

\* Only available with 16 channel DVR

**NOTE:** Honeywell reserves the right, without notification, to make changes in product design or specifications.

**For additional information,**

please visit [www.honeywell.com/security/uk](http://www.honeywell.com/security/uk)

**Honeywell Security Group**

Honeywell Systems Group  
Aston Fields Road  
Whitehouse Industrial Estate  
Runcorn  
Cheshire  
WA7 3DL

Tel: 08448 000 235

[www.honeywell.com](http://www.honeywell.com)

HVS-HRSD816-03-UK(1109)DS-GCSC  
November 2009  
© 2009 Honeywell International Inc.

