
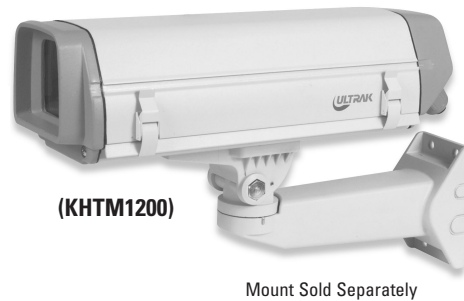


# KHTM1200 Series

**MEDIUM ENVIRONMENTAL HOUSING**

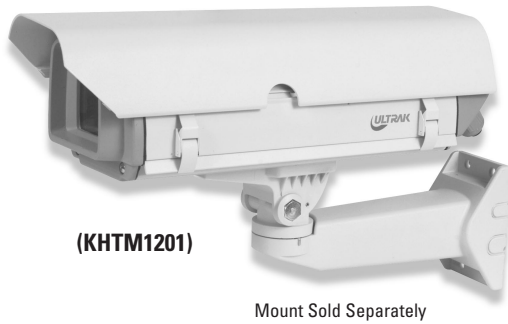

The new KHTM series housing is a stylish and functional camera enclosure, with a design focus of simplifying installations. The new side entry design of the KHTM allows total access to all sides of the camera, with the help of the hinged mounting tray. A camera and lens can be entirely installed, adjusted, and tested without shifting the position of the housing. After the camera is set up, the lid is simply closed and the adjustments are uninterrupted.

The signature look of the KHTM incorporates many features such as a flexible-mounting track, allowing this housing to fit any mount regardless of its hole patterns. Optional features include a sunshield, and a factory installed heater and blower option.

The KHTM housing is constructed of die-cast and extruded aluminum with a two-tone gray epoxy powder coating, making it attractive, durable, as well as corrosion resistant. Weather and dust proof are accomplished with durable neoprene gaskets making the housing suitable for all indoor and outdoor applications.

These housings can accommodate 1/2" and 1/3" cameras with fixed and varifocal lenses.

- Signature Ultrak® contemporary design
- Die-cast and extruded aluminum construction
- Total access design allows easy access to camera from all sides
- Integrated "Flex mount" adjustable mounting track
- 3/4", 1/2" and 1/4" cable entry glands (PG21, PG13.5, and PG9)
- Sunshield option
- Indoor and outdoor installations
- Epoxy powder coated for corrosion resistance
- Dust-proof, IP66 weatherproof rating
- Pre-assembled heater and blower models available
- 2 year limited warranty
- Dual positive locking clamps
- Reversible camera mounting tray to elevate low profile cameras
- Cost effective



# KHTM1200 Series

## TECHNICAL SPECIFICATIONS

### MODELS

<b>KHTM1200</b>	Enclosure, 15" front to rear length, top access, indoor/outdoor for 1/2" and 1/3" CCD cameras with fixed focal length lenses
<b>KHTM1201</b>	Same as KHTM except supplied with sunshield
<b>KHTM12N2</b>	Same as KHTM except supplied with sunshield and 24VAC heater (20 watt)
<b>KHTM12N3</b>	Same as KHTM1200 except supplied with sunshield and 24VAC heater (20 watt) and 24VAC blower
<b>KHTM12WM</b>	Same as KHTM1200 except supplied with MHW13THG wall mounts

### MECHANICAL

Camera Mounting	Reversible slotted camera sled
Max Camera Size	
KHTM1200	3.1W x 3.2H x 11.4L in. (78 x 82 x 290mm)
KHTM12N2/N3	3.1W x 3.2H x 9L in. (78 x 82 x 230mm)
Viewing Area:	
KHTM12	2.9 x 2.4 in. (73 x 61mm)
Viewing Window	
KHTM12	Clear 1/8" double density glass
Cable Entry	3 glands, PG9, PG16, PG21
Dimensions	See drawings
Weight:	
KHTM1200	4.2 lbs (1.90kg)

### GENERAL

Construction	Extruded and die-cast aluminum
Finish	Ultrak® grey two tone, epoxy powder coating
Environmental	IP66 rated

### OPTIONS

<b>KHTM12SS</b>	Sunshield for KHTM12
<b>KHTMBKN1</b>	Blower kit for KHTM12
<b>KHTMHKN1</b>	Heater, thermostat controlled kit for KHTM1200, 24VAC (20 watt)
<b>KHTMHKN2</b>	Heater and blower, thermostat controlled heater and blower kit for KHTM1200, 24VAC

### HEATER SPECIFICATIONS


Power Supply	24VAC
Power Consumption	20W
Heater On	t < 5 +/-3 t < 41 +/-5
Heater Off	t > 15 +/-3 t > 59 +/-5

### BLOWER SPECIFICATIONS

Power Supply	24VAC
Power Consumption	3.4w
Blower On	t > 35 +/-3 t > 95 +/-3
Blower Off	t < 20 +/-3 t < 68 +/-5

### RECOMMENDED MOUNTS

MHC21SHG	Ceiling "J" mount, enclosure, 21"H, 30 lbs (13.5kg) max, Ultrak® Grey
MHW13THG	Wall mount, enclosure 13" L, 30 lbs (13.5kg) max, internal cable channel, Ultrak® Grey

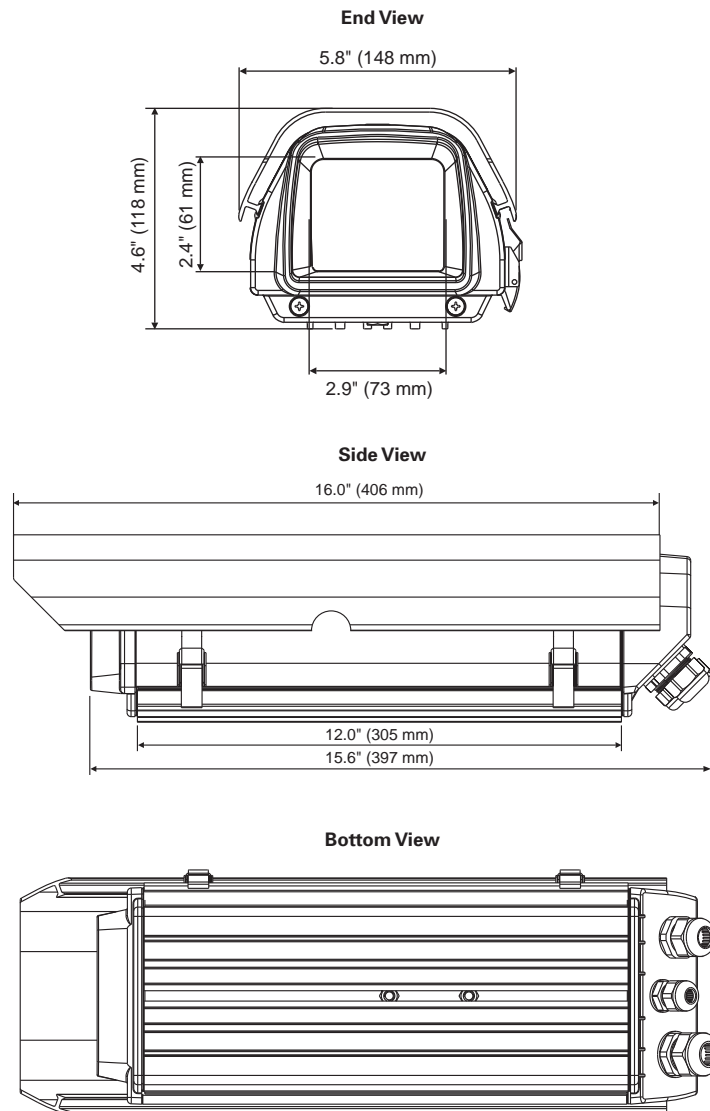

*Design and specifications subject to change without notice.*

Conversion: 1" = 25.4mm  
Measurement conversions are approximate

#### Ultrak Worldwide Support Center:

1305 Waters Ridge Drive  
Lewisville, TX 75057  
(800) 796-2288 (972) 353-6500  
Fax (972) 353-6670

