


# Access Quattro

The Access Quattro has been designed for easy mounting onto any standard electronic socket. Access Quattro consists of a basic reader and a customizable snap-on cover. The reader combines comprehensive technical features with an exclusive and individual design.

The reader is available with most common interfaces and with 125 kHz, 13.56 MHz, Mifare® or Legic® technologies as well as in customized colors and with individual company logos.

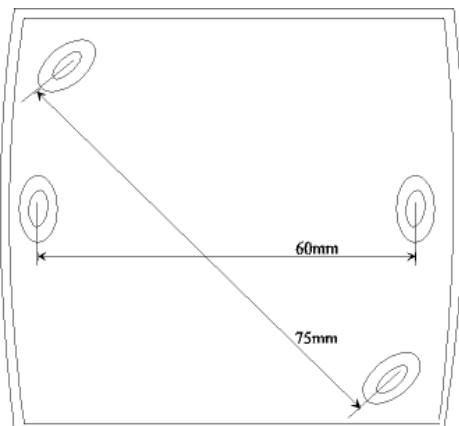

## SPECIFICATION

Available models:	
Access 7 A Quattro	125 kHz technology ID-number reader
Access 7 C Quattro	13,56 MHz multi-technology ID-number reader
Access 8 CM Quattro	Mifare® RO reader
Access 9 CM Quattro	Mifare® R/W reader
Access 9 CL Quattro	Legic® R/W and RO reader
Power supply	Depends on the module
Interfaces	Wiegand, Clock&Data, RS232, RS422 (Access 7 C Quattro)
Protection class	IP55
Material of design housing	Plastic
Dimensions of housing	86 x 86 x 16,5 mm
Operating temperature	-40...+55 °C
Storage temperature	-40...+55 °C
Field strength	According to EN300330
EMC	Meets CE requirements

Idesco Oy reserves the right to revise this publication and to make changes to its content as well as the right to change or discontinue these products, at any time, without obligation to notify any person or entity of such revisions or changes. All trademarks and registered trademarks are property of their respective owners. Printed in Finland 10/2005