

DirectIP™ 64 Channel Full HD Real-time Recorder

DR-8364



- 64ch@FHD Live/Rec/Remote
- Total incoming throughput 900Mbps (900/400/500Mbps total/rec/remote)
- Native 4K and H.265 Support
- Up to 90% storage saving via IDIS Intelligent Codec
- Native RAID 1/5/10 support with Front loading HDDs
- Enhanced expandability up to 24 HDD (8-bay SATA & 4 e-SATA)
- Easy to install, set-up, and play with DirectIP Cameras
- Supports network configuration through FEN service
- Supports third-party cameras (Axis, Panasonic, ONVIF PRO S)



SPECIFICATIONS

VIDEO	
Video Inputs	64 IP Channels
Max. Incoming Throughput	900Mbps
Supported Camera	DirectIP, Axis, Panasonic, ONVIF
Video Outputs	1 HDMI, 1 VGA
Display Resolution	3840 x 2160, 1920 x 1200, 1920 x 1080, 1680 x 1050, 1600 x 1200
Display Speed	Up to 1920ips
Digital Zoom	x2 ~ x12
RECORDING	
Max. Throughput	400Mbps, 1920ips @ Full HD
Recording Resolution	Up to 8MP (Depending on IP Camera)
Compression	H.264, H.265
Recording Mode	Time-lapse, Event, Pre-event, Panic
Trigger Events	Alarm In, Audio Detection, Motion Detection, Trip Zone, Tampering, Video Loss
PLAYBACK	
Performance	16ch Full HD Synchronous Playback, 4ch 4K Playback
Search Mode	Time-lapse, Event Log, Thumbnail, Motion, Text-in
Digital Zoom	x2 ~ x12
STORAGE	
HDD	SATA x 8, eSATA x 4 (Up to 6TB Capacity for Each Disk), RAID 1, 5, 10 Supported
Total Capacity	144TB = 6TB x (8 (Internal)) + 4 x 4 (External))
NETWORK	
Client Connection	Gigabit Ethernet (Client) x 1
Video In Connection	Gigabit Ethernet (Video In) x 3, SFP (Video In) x 2
Transmission Speed	400Mbps / 500Mbps (BRP Mode)
Camera Power	-
Remote Data Export	IDIS Player, AVI, JPG
Event Notification	Email (Attach Clip (.cbf) .MP4), Callback to Remote S/W, Push Notification (IDIS Mobile), SNS (Twitter)
Two-way Audio	Yes
Client Viewer	IDIS Center, IDIS Mobile, IDIS Web, IDIS Solution Suite
INTERFACE	
Audio In / Out	Local (NVR) : 1 RCA / 1 RCA + 1 HDMI IP Camera : 64 / 64 (Depending on IP Camera)
Alarm In / Out	Local (NVR) : 4 / 1 IP Camera : 64 / 64 (Depending on IP Camera)
Alarm Reset In	1
Serial Interface	RS232 (Terminal Block), RS485 (Terminal Block)
USB	USB 2.0 x 2, USB 3.0 x 1
User Interface	Mouse, IR Remote Control, Network Remote Keyboard
GENERAL	
Operating System	Embedded Linux
Unit Dimensions (W x H x D)	482.6mm x 88mm x 523.3mm (19" x 3.5" x 20.6")
Unit Weight	9.9kg (21.8lb) (Without HDD)
Working Temperature	0°C to 40°C (32°F ~ 104°F)
Operating Humidity	0% ~ 90%
Power Input	AC 100-240 V, 50/60Hz, 2.0 - 1.0A
Power Consumption	120W (With 8 HDDs)
Approvals	FCC, UL, CE, CB, KC

DIMENSIONS

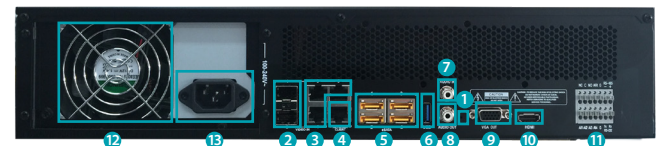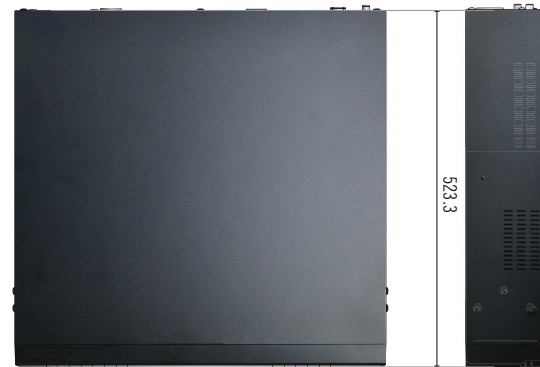

- 1 Factory Reset Button
- 2 Video In SFP Slots
- 3 Video In RJ45 Dongle
- 4 Network Port
- 5 eSATA Ports
- 6 USB 3.0
- 7 Audio In
- 8 Audio Out
- 9 VGA Out Port
- 10 HDMI
- 11 Alarm Connection Ports
- 12 Vent
- 13 Power In Port

ACCESSORIES (OPTIONAL)



DH-2212PF



DA-ES1104

IDIS HQ

IDIS Tower, 334 Pangyo-ro Bundang-gu, Seongnam-si Gyeonggi-do, 463-400 Republic of Korea

T +82 (0)31 723 5400
F +82 (0)31 723 5100
E sales@idisglobal.com

IDIS America

801 Hammond Street Suite 200 Coppell, TX 75019 U.S.A.

T +1 469 444 6538
F +1 469 464 4449
E sales_americas@idisglobal.com

IDIS Europe

1000 Great West Road Brentford, Middlesex TW8 9HH The United Kingdom

T +44 (0)203 657 5678
F +44 (0)203 697 9360
E uksales@idisglobal.com

IDIS Benelux

De Slof 9 5107 RH Dongen The Netherlands

T +31 (0)162 387247
F +31 (0)162 311915
E sales@bnl.idisglobal.com

IDIS Middle East

P.O. Box 341037 D-308, DSO HQ Bldg Dubai Silicon Oasis Dubai, U.A.E.

T +971 4 501 5434
F +971 4 501 5436
E sales_mena@idisglobal.com



One Solution. One Company.