

TR-2504P

DirectCX PoC 4channel H.265 Recorder



- Transmits both HD Analog video and power over the same coaxial cable
 - H.265 encoding , Intelligent Codec Support
 - Full HD Display with HDMI and VGA output
 - Supports one click network configuration through FEN service
- Supports Multi Standard Analog Camera
 - Up to 5MP resolution support
 - Long transmission distance over coax cable
- Up to 120ips Full HD recording
 - UHD Display with HDMI output
 - Supports OSD control over Coax

SPECIFICATIONS


Video	
Video Inputs	4 BNC
PoC Video Inputs	Support IDIS PoC Camera
Supported Camera	HD-TVI : 5MP, 4MP, 3MP, 1080P, 720P AHD : 5MP, 4MP, 3MP, 1080P, 720P CVBS : NTSC / PAL
Video Outputs	1 HDMI, 1 VGA
Display Resolution	HDMI : 3840 x 2160, 1920 x 1080, 1280 x 1024 VGA : 1920 x 1080, 1280 x 1024
Display Speed	Up to 120ips
Digital Zoom	x2 ~ x7
Recording	
Recording Resolution	2560x1920, 2560x1440, 1920x1536, 1920x1080, 1280x720, 960x576, 960x480, 720x576, 720x480, 960x288, 960x240, 640x360, 720x288, 720x240, 480x288, 480x240, 360x288, 360x240
Video Compression	H.265, H.264, Intelligent Codec
Recording Mode	Time-Lapse, Event, Pre-Event, Panic
Trigger Event	Motion, Video loss, Video Blind, Alarm in, Text-In, System
Playback	
Performance	4ch synchronous playback
Search Mode	Time-lapse, Event log, Text-in, Thumbnail
Digital Zoom	x2 ~ x7
Storage	
HDD	SATA x 2
Network	
Client Connection	Fast Ethernet x1
Transmission Speed	30ips@Full HD per channel, same as recording stream
Event Notification	Email (attach clip cbf, mp4), Callback to Remote S/W, Push notification (IDIS Mobile)
Two-way Audio	Yes
Interface	
Audio In / Out	4 RCA / 1 RCA + 1 HDMI
Alarm In / Out	4 In / 1 Relay out
Serial Interface	RS232 / RS485(Terminal Block)
USB	USB 2.0 x 2(Front x 2)
User Interface	Mouse, IR Remote Control, Network Remote Keyboard
General	
Operating System	Embedded Linux
Environmental	
Operating Temperature	0°C to 40°C (32°F ~ 104°F)
Operating Humidity	0% ~ 90%
Electrical	
Power Input	Adaptor Input : 100-240V AC, 50/60Hz, 2.5A, Output : 42V DC, 2A
Power Consumption	42V=, 1.57A, 66W
Mechanical	
Unit Dimensions (W x H x D)	340mm x 44mm x 302.3mm (13.4" x 1.7" x 11.9")
Unit Weight	2.68 kg (5.91 lb) (with 2 2TB HDD)



PRODUCT IMAGE



DIMENSIONS

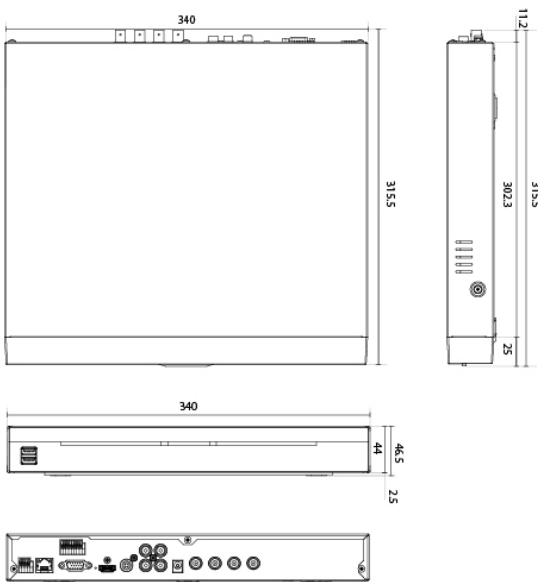

(Unit - mm)

