

TR-2604

DirectCX 4channel H.265 Hybrid Recorder



- Supports Multi Standard Analog Camera and IP Camera
 - H.265 encoding , Intelligent Codec Support
 - Supports OSD control over Coax
- Supports Dedicated Network Port for IP Cameras
 - Up to 5MP Analog Camera support
 - Expandable up to 12TB using 2 SATA interfaces
- Up to 120ips Full HD recording
 - UHD Display with HDMI output
 - Supports one click network configuration through FEN service

SPECIFICATIONS


Video	
Video Inputs	4 Channels (4 BNC, 1 RJ45 : Up to 2 IP Cameras Switchable)
Supported Camera	HD-TVI : 5MP, 4MP, 1080P, 720P AHD : 5MP, 4MP, 1080P, 720P CVBS : NTSC / PAL IP (DirectIP, IDIS) : Up to 12MP(Depending on IP Camera)
Video Outputs	1 HDMI, 1 VGA
Display Resolution	HDMI : 3840 x 2160, 1920 x 1200, 1920 x 1080, 1680 x 1050, 1600 x 1200 VGA : 1920 x 1080, 1680 x 1050, 1600 x 1200
Display Speed	Up to 120ips
Digital Zoom	x2 ~ x12
Recording	
Recording Resolution	2560x1920, 2560x1440, 1920x1080, 1280x720, 720x576, 720x480, 640x360, 720x288, 720x240, 360x288, 360x240
Video Compression	Analog : H.265, Intelligent Codec IP : H.265, H.264, Intelligent Codec
Recording Mode	Time-Lapse, Event, Pre-Event, Panic
Trigger Event	Motion, Tampering, Video Loss, Alarm In, Network Alarm, Text-in, System, Etc.
Playback	
Performance	4ch synchronous playback
Search Mode	Time-lapse, Event Log, Text-in
Digital Zoom	x2 ~ x12
Storage	
HDD	SATA x 2
Network	
Client Connection	Fast Ethernet x1
Transmission Speed	50Mbps
Event Notification	Email (attach clip cbf, mp4), Callback to Remote S/W, Push (IDIS Mobile), FTP, HTTP
Two-way Audio	Yes
Interface	
Audio In / Out	4 RCA / 1 RCA + 1 HDMI
Alarm In / Out	4 / 1
Serial Interface	RS232 / RS485(Terminal Block)
USB	USB 2.0 x 2(Front x 2)
User Interface	Mouse, Network Remote Keyboard
General	
Operating System	Embedded Linux
Environmental	
Operating Temperature	0°C to 40°C (32°F ~ 104°F)
Operating Humidity	0% ~ 90%
Electrical	
Power Input	Adaptor Input : 100-240V AC, 50/60Hz, 1.5A, Output : 12V DC, 5A
Power Consumption	12V~, 1.83A, 21.96W
Approval	FCC, CE, KC
Mechanical	
Unit Dimensions (W x H x D)	340mm x 44mm x 302.3mm (13.4" x 1.7" x 11.9")
Unit Weight	3.16 kg (with 2 2TB HDD)



PRODUCT IMAGE



DIMENSIONS

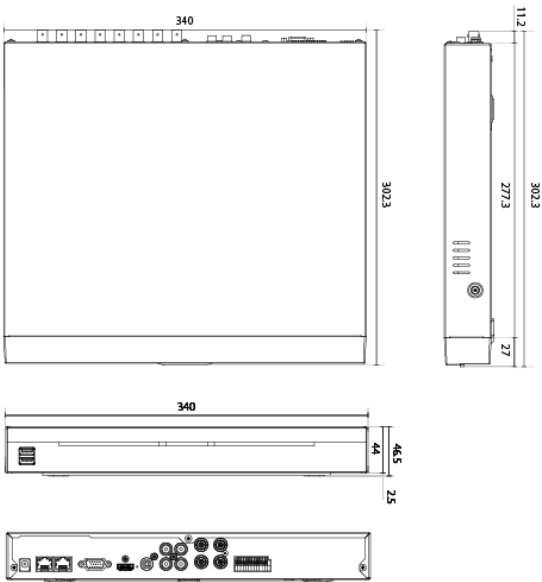

(Unit - mm)

